

18-452/18-750
Wireless Networks and Applications
Lecture 11: MIMO and WiFi Deployments

Peter Steenkiste

Fall Semester 2020

<http://www.cs.cmu.edu/~prs/wirelessF20/>


Outline

- **MIMO and recent WiFi versions**
 - » Refresher: spatial diversity
 - » MIMO basics
 - » Single user MIMO: 802.11n
 - » Multi-user MIMO: 802.11ac
 - » Millimeter wave: 802.11ad
- **WiFi deployments**
 - » Planning
 - » Channel selection
 - » Rate adaptation

Spatial Diversity

- Use multiple antennas that pick up the signal in slightly different locations
 - » Channels uncorrelated with sufficient antenna separation


- Receiver diversity: $\vec{i} \times \vec{H} \times \vec{P}_R = 0$




- Receiver can pick strongest signal: y_1 or y_2
- Or combines the signals: multiply y with the complex conjugate h^* of the channel vector h
 - » Can learn h based on training data (Lecture 5)

Other Diversity Options

- Transmit diversity:

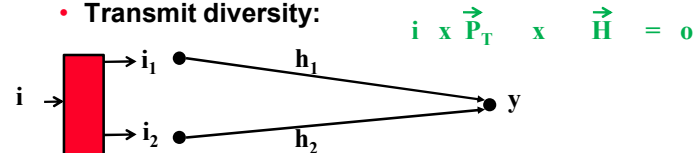

- Combined:

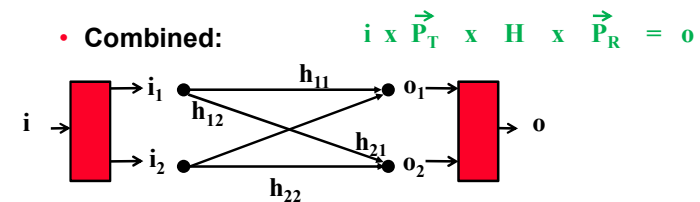


How Do We Increase Throughput in Wireless?

- **Wired world:**
Pull more wires!



- **Wireless world:**




How about if we could do the same thing as with wires: send parallel data streams!

Peter A. Steenkiste, CMU

5

MIMO Multiple In Multiple Out

N transmit antennas



M receive antennas

- N x M subchannels that can be used to send multiple data streams simultaneously
- Fading on channels is largely independent
 - » Assuming antennas are separate 1/2 wavelength or more
- Combines ideas from spatial and time diversity, e.g. 1 x N and N x 1
- Very effective if there is no direct line of sight
 - » Subchannels become more independent

Peter A. Steenkiste, CMU

6

Why So Exciting?

Method	Capacity
SISO	$B \log_2(1 + \rho)$
Diversity (1xN or Nx1)	$B \log_2(1 + \rho N)$
Diversity (NxN)	$B \log_2(1 + \rho N^2)$
Multiplexing	$NB \log_2(1 + \rho)$


802.11 with multiple antennas for dummies, Daniel Halperin, Wenjun Hu, Anmol Sheth, David Wetherall, ACM CCR, Jan 2010

Peter A. Steenkiste, CMU

7

MIMO How Does it Work?

- Transmit and receive multiple data streams
- Coordinate the processing at the transmitter and receiver to overcome channel impairments
 - » Maximize throughput or minimize interference

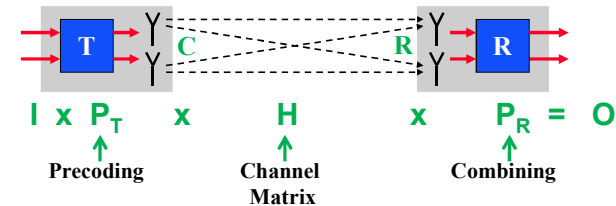


- Combines previous techniques

Peter A. Steenkiste, CMU

10

An Example of Space Coding

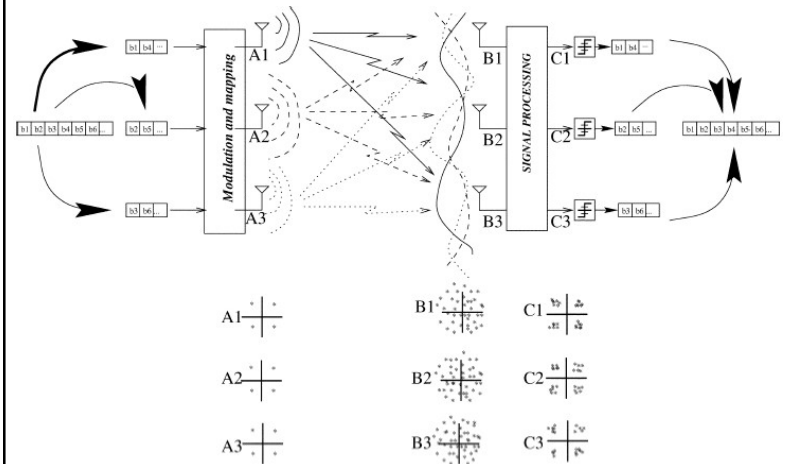

Direct-Mapped NxM MIMO Only Receiver Processing ($P_T=I$)

Effect of transmission $\vec{R} = \overset{M}{H} * \overset{M \times N}{C} + \overset{N}{N}$

Decoding $\vec{O} = \underset{D}{P_R} * \vec{R} \quad \vec{C} = \overset{M}{I}$

Results $\vec{O} = \underset{D}{P_R} * \overset{M}{H} * \overset{M}{I} + \underset{N}{P_R} * \vec{N}$

- How do we pick P_R ? “Inverse” of H : H^{-1}
 - » Equivalent of nulling the interfering signals (zero forcing)
 - » Only possible if the paths are completely independent
- Noise amplification is a concern if H is non-invertible – its determinant will be small

Peter A. Steenkiste, CMU

12

Precoded NxM MIMO

Effect of transmission $\vec{R} = \overset{M}{H} * \overset{M \times N}{C} + \overset{N}{N}$

Coding/decoding $\vec{O} = \underset{D}{P_R} * \vec{R} \quad \vec{C} = \overset{N}{P_T} * \overset{D}{I}$


Results $\vec{O} = \underset{D}{P_R} * \overset{M}{H} * \overset{N}{P_T} * \overset{D}{I} + \underset{N}{P_R} * \vec{N}$

- How do we pick P_R and P_T ?
- Singular value decomposition of $H = U * S * V$
 - » U and V are unitary matrices – $U^H * U = V^H * V = I$ ← Identity matrix
 - » S is diagonal matrix


Peter A. Steenkiste, CMU

13


Mechanisms Supported by MIMO




Diversity for improved system performance



Beam-forming for improved coverage (less cells to cover a given area)



Spatial division multiple access (“MU-MIMO”) for improved capacity (more user per cell)



Multilayer transmission (“SU-MIMO”) for higher data rates in a given bandwidth

Peter A. Steenkiste, CMU

15

MIMO Discussion

- **Need channel matrix H: use training with known signal**
- **So far we have ignored multi-path**
 - » Each channel is multiple paths with different properties
 - » Becomes even messier!
- **MIMO is used in 802.11n**
 - » Can use two adjacent non-overlapping “WiFi channels”
 - » Raises lots of compatibility issues
 - » Potential throughputs of 100s of Mbps
- **Focus is on maximizing throughput between two nodes**
 - » Is this always the right goal?

Peter A. Steenkiste, CMU

16

802.11n Overview

- **802.11n extends 802.11a for MIMO**
 - » Supports up to 4x4 MIMO
 - » Preamble that includes high throughput training field
- **Standardization was completed in Oct 2009, but early products had long been available**
 - » WiFi alliance started certification using draft in mid-2007
- **Supported in both the 2.4 and 5 GHz bands**
 - » Goal: typical indoor rates of 100-200 Mbps; max 600 Mbps
- **Use either 1 or 2 non-overlapping channels**
 - » Uses either 20 or 40 MHz - interoperability problems!
- **Supports frame aggregation to amortize overheads over multiple frames**
 - » Optimized version of 802.11e

Peter A. Steenkiste, CMU

17

802.11n Backwards Compatibility


- **802.11n can create interoperability problems for existing 802.11 devices (abg)**
 - » 802.11n does not sense their presence
 - » Legacy devices end up deferring and dropping in rate
- **Mixes Mode Format protection embeds an “n” frame in a “g” or “a” frame**
 - » Preamble is structured so legacy systems can decode header, but MIMO can achieve higher speed (training, cod/mod info)
 - » Works only for 20 MHz 802.11n use
 - » Only deals with interoperability with a and g – still need CTS protection for b
- **For 40 MHz 802.11n, we need CTS protection on both the 20 MHz channels – similar to g vs. b**
 - » Amortize over multiple transmissions

Peter A. Steenkiste, CMU

18

Interoperability Uses PLC in Three Modes

- **Legacy mode: use 802.11a/g OFDM format**
 - » The L-SIG field contains rate and length information
 - » Loses benefits of 802.11n!

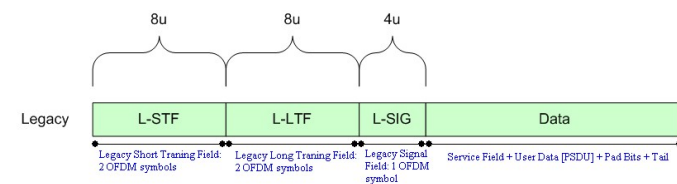


- **Mixed mode:**
 - » Include both an 802.11a/g and 802.11n PLC - next slide
 - » 802.11n devices can interpret green field, which includes the L-SIG field (rate and length information)


PLC – PHY Layve Convergence protocol
 Peter A. Steenkiste, CMU http://rfmw.em.keysight.com/wireless/helpfiles/n7617a/mimo_ofdm_signal_structure.htm

19

Interoperability: High Throughput (HT) Modes

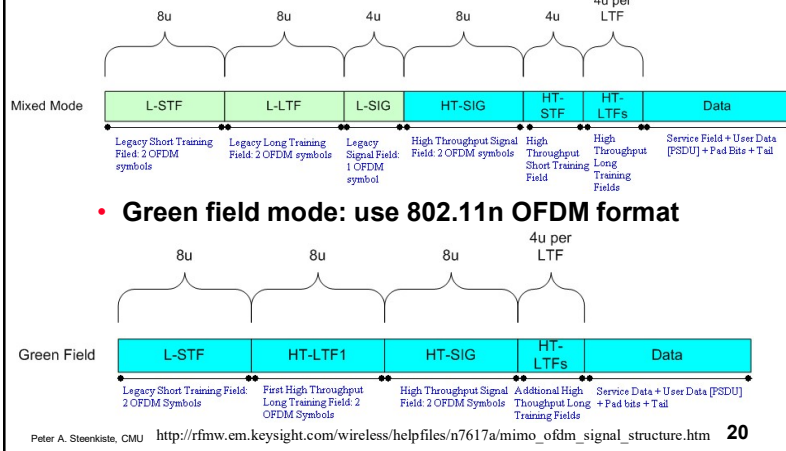


MIMO in a Network Context

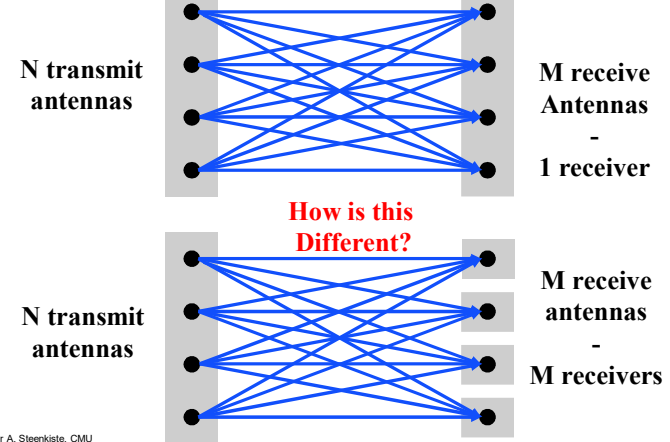


Multi-User MIMO Discussion

- **Math is similar to MIMO, except for the receiver processing (P_R)**
 - » Receivers do not have access to the signals received by antennas on other nodes
 - » Cannot cancel interference – limits ability to extract useful data
 - » Can only do transmit-side preprocessing
- **MU-MIMO versus MIMO is really a tradeoff between TDMA and use of space diversity**
 - » **MIMO:** send packets to two destinations sequentially and efficiently
 - » **MU-MIMO:** send packet to destination simultaneously, but interference cancelation is more limited



How about This?

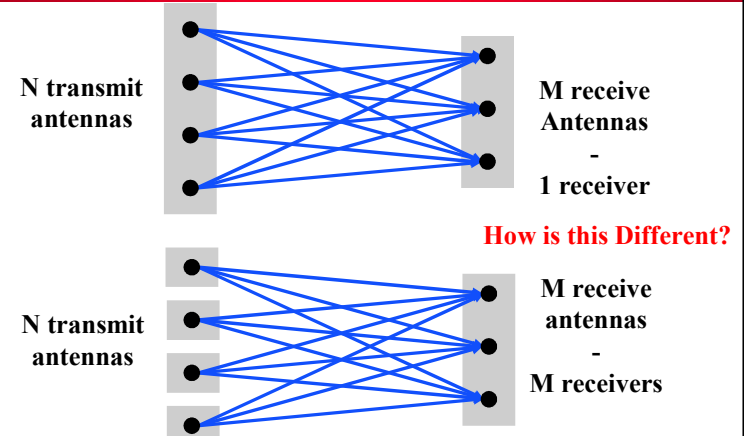

Multi-User MIMO Up versus Down Link

- Assume one AP with multiple clients
- Downlink: Broadcast Channel (BC)
 - » Base station transmit separate data streams to multiple independent users
 - » Easier to do: close to the traditional CSMA-CA model of having each client receive a packet from the base station independently
- Uplink: Multiple Access Channel (MAC)
 - » Multiple clients transmit simultaneously to a single base station
 - » Requires fine grain clock coordination among clients on packet transmission – hard problem!
 - » Tricky for traditional CSMA-CA protocols

Peter A. Steenkiste, CMU

24

802.11ac Multi-user MIMO


- Extends beyond 802.11n
 - » MIMO: up to 8 x 8 channels (vs. 4 x 4)
 - » More bandwidth: up to 160 MHz by bonding up to 8 channels (vs. 40 MHz)
 - » More aggressive signal coding: up to 256 QAM (vs. 64 QAM); both use 5/6 coding rate (data vs. total bits)
 - » Uses RTS-CTS for clear channel assessment
 - » Multi-gigabit rates (depends on configuration)
- Support for multi-user MIMO on the downlink
 - » Can support different frames to multiple clients at the same time
 - » Especially useful for smaller devices, e.g., smartphones
 - » Besides beam forming to target signal to device, requires also nulling to limit interference

Peter A. Steenkiste, CMU

25

Challenges in 802.11ac

- You must have traffic for multiple receivers!
- Channels to the receivers be “orthogonal”



$$R1: O_1 = P_{R1} * H_1 * P_T * I + P_{R1} * N$$

$$R2: O_2 = P_{R2} * H_2 * P_T * I + P_{R2} * N$$

- » The signal that you create with the packet for one destination should have a “null” for the other destination(s)
- » Important since the other receivers cannot cancel out that signal
- Becomes a scheduling problem: for each “packet” transmission, identify the destinations that have traffic waiting and that are “the most” orthogonal

Peter A. Steenkiste, CMU

26

802.11ad 60 GHz WiFi


- Uses a new physical layer definition specifically for 60 GHz band
 - » Very different signal propagation properties
 - » Does not penetrate walls, but does work with reflections
 - » Shorter distances; up to 7 Gbps
 - » 6 channels of 2.16 GHz
- Compatible with 802.11 in 2.4 / 5 GHz bands
 - » Backwards compatible MAC (not PHY!)
 - » E.g., mobile devices can switch between bands
- Has been used for point-point links for a while
 - » Set top box to TV screen,
 - » Combined with other 802.11 versions

Peter A. Steenkiste, CMU

27

Optimizing Communication in 802.11ad

- **Transmission range in 60 GHz is limited**
- **Must use directional antennas to direct energy to the receiver**
 - » Increases range and throughput (high signal strength)
 - » Also reduces interference at other nodes!
- **Good news: antenna size scales with wave length**
 - » Small antennas and narrow beams
- **Bad news: how do nodes find each other?**
 - » Use iterative algorithm, starting with wider beams



Peter A. Steenkiste, CMU

28

Outline


- **MIMO and recent WiFi versions**
 - » Refresher: spatial diversity
 - » MIMO basics
 - » Single user MIMO: 802.11n
 - » Multi-user MIMO: 802.11ac
 - » Millimeter wave: 802.11ad
- **WiFi deployments**
 - » Planning
 - » Channel selection
 - » Rate adaptation

Peter A. Steenkiste, CMU

29

Infrastructure Deployments Frequency Reuse in Space

- **Set of cooperating cells with a base stations must cover a large area**
- **Cells that reuse frequencies should be as distant as possible to minimize interference and maximize capacity**
 - » Hidden and exposed terminals are also a concern

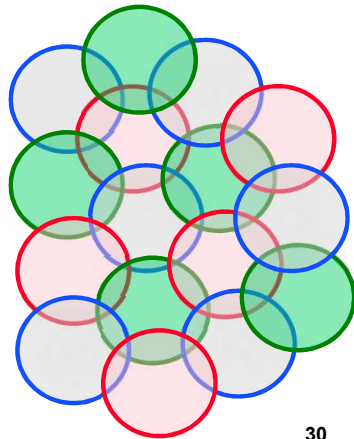


Peter A. Steenkiste, CMU

30

Frequencies are Precious

- **2.4 Ghz: 3 non-overlapping channels**
 - » Plus lots of competition: microwaves and other devices
- **5 GHz: 20+ channels, but with constraints**
 - » Power constraints, indoor/outdoor, ..
 - » Exact number and rules depend on the country
- **802.11n and ac: bonding of 2-8 channels**
- **And the world is not flat!**

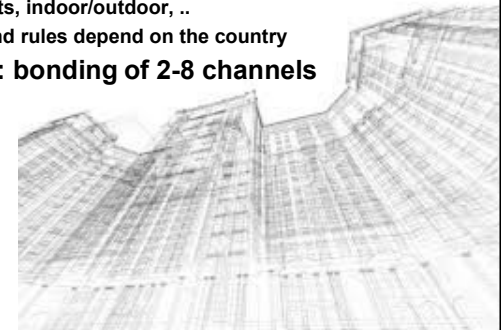

Peter A. Steenkiste, CMU

Frequency Planning


- **Campus-style WiFi deployments are very carefully planned:**
- **A lot of measurements to determine where to place the AP**
 - » What is the coverage area?
 - » What set of APs has good coverage with few “dead spots”
 - » What level of interference can we expect between cells
 - » What traffic loads can we expect, e.g., auditorium vs office
- **Frequencies are very carefully assigned**
 - » Can use the above measurements
- **Must periodically re-evaluate infrastructure**
 - » Furniture is moved, remodeling, ...

Peter A. Steenkiste, CMU

32

Centralized Control

- **Many WiFi deployments have centralized control**
- **APs report measurements**
 - » Signal strengths, interference from other cells, load, ...
- **Controller makes adjustments**
 - » Changes frequency bands
 - » Adjusts power
 - » Redistributes load
 - » Can switch APs on/off
 - » Very sophisticated!

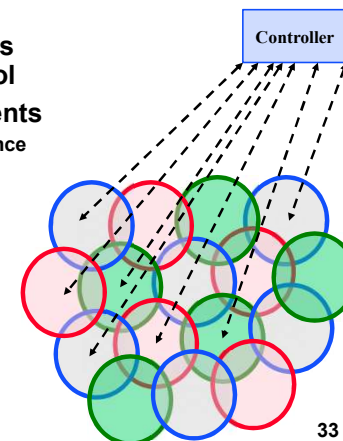

Peter A. Steenkiste, CMU

33

Monitoring the Spectrum

- **FCC (in the US) controls spectrum use**
 - » Rules for unlicensed spectrum, licenses for other spectrum, what technologies can be used
- **... but there is an special clause for campuses**
 - » They have significant control over unlicensed spectrum use on the campus
 - » They can even use some “licensed” spectrum if it does not interfere with the license holder
- **Network management carefully monitors spectrum use to make sure it is used well**
 - » Shut down rogue APs – interference, security
 - » Non-approved equipment - interference
 - » Discourages outdated standards - inefficient

Peter A. Steenkiste, CMU

34

How about Small Networks?

- **Most WiFi networks are small and (largely) unmanaged**
 - » Home networks, hotspots, ...
- **Traditional solution: user-chosen frequency of their AP or a factory set default**
 - » How well does that work?
- **Today, APs pick a channel automatically in a smart way**
 - » Monitors how busy channels are or how strong the signals are and then picks the best channel
 - » Can periodically check for better channels

Peter A. Steenkiste, CMU

35