

## 15-744: Computer Networking

### L-20 Multicast



## Multicast Routing



- Unicast: one source to one destination
- Multicast: one source to many destinations
- Two main functions:
  - Efficient data distribution
  - Logical naming of a group

2

## Example Applications



- Broadcast audio/video
- Push-based systems
- Software distribution
- Web-cache updates
- Teleconferencing (audio, video, shared whiteboard, text editor)
- Multi-player games
- Server/service location
- Other distributed applications

3


## Overview



- **IP Multicast Service Basics**
- Multicast Routing Basics
- Overlay Multicast
- Reliability
- Congestion Control


4

## IP Multicast Architecture

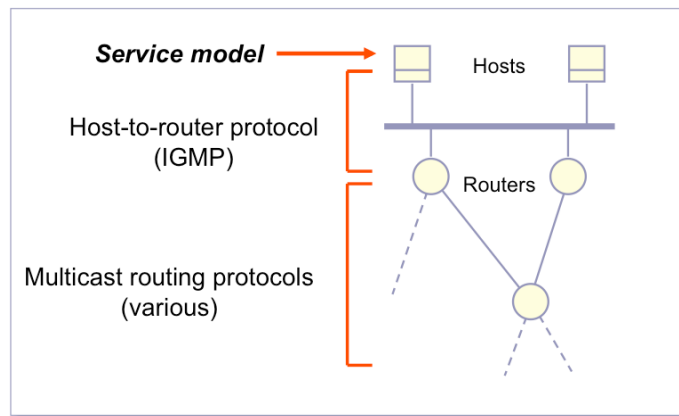

5

## Multicast – Efficient Data Distribution

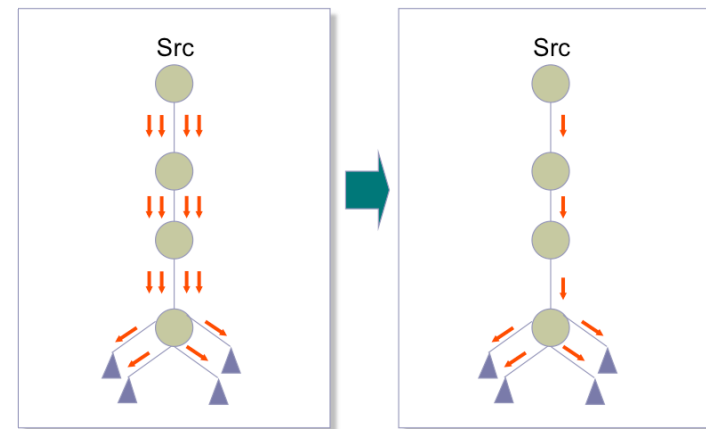

6

## Multicast Router Responsibilities



- Learn of the existence of multicast groups (through advertisement)
- Identify links with group members
- Establish state to route packets
  - Replicate packets on appropriate interfaces
  - Routing entry:

Src, incoming interface

List of outgoing interfaces

7

## IP Multicast Service Model (rfc1112)



- Each group identified by a single IP address
- Groups may be of any size
- Members of groups may be located anywhere in the Internet
- Members of groups can join and leave at will
- Senders need not be members
- Group membership not known explicitly
- Analogy:
  - Each multicast address is like a radio frequency, on which anyone can transmit, and to which anyone can tune-in.

8

## IP Multicast Addresses



- Class D IP addresses
  - 224.0.0.0 – 239.255.255.255




- How to allocated these addresses?
  - Well-known multicast addresses, assigned by IANA
  - Transient multicast addresses, assigned and reclaimed dynamically, e.g., by “sdr” program

9

## Multicast Scope Control – Small TTLs



- TTL expanding-ring search to reach or find a nearby subset of a group

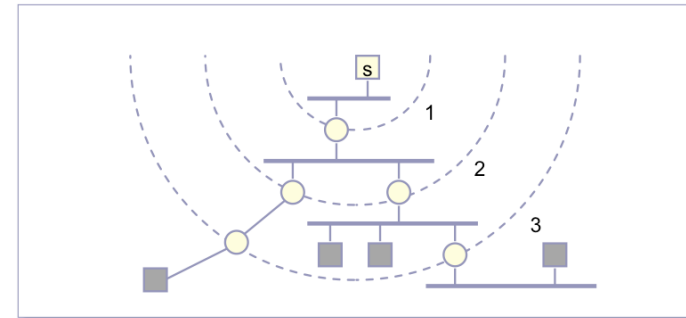


11

## Multicast Scope Control – Large TTLs



- Administrative TTL Boundaries to keep multicast traffic within an administrative domain, e.g., for privacy or resource reasons

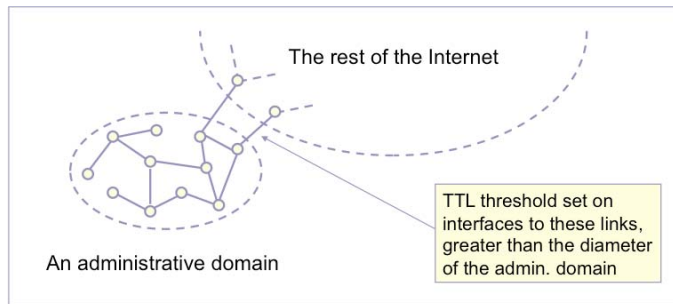

12


## Overview



- IP Multicast Service Basics
- **Multicast Routing Basics**
- Overlay Multicast
- Reliability
- Congestion Control

13

## IP Multicast Architecture

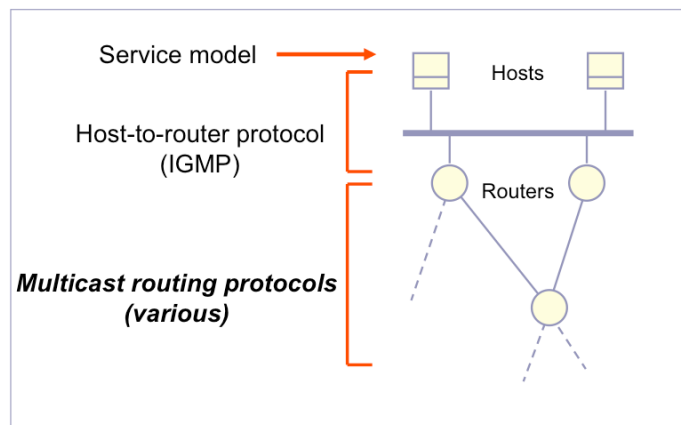

14

## Multicast Routing



- Basic objective – build distribution tree for multicast packets
- Multicast service model makes it hard
  - Anonymity
  - Dynamic join/leave

15


## Shared vs. Source-based Trees



- Source-based trees
  - Separate shortest path tree for each sender
  - DVMRP, MOSPF, PIM-DM, PIM-SM
- Shared trees
  - Single tree shared by all members
  - Data flows on same tree regardless of sender
  - CBT, PIM-SM


16

## Source-based Trees

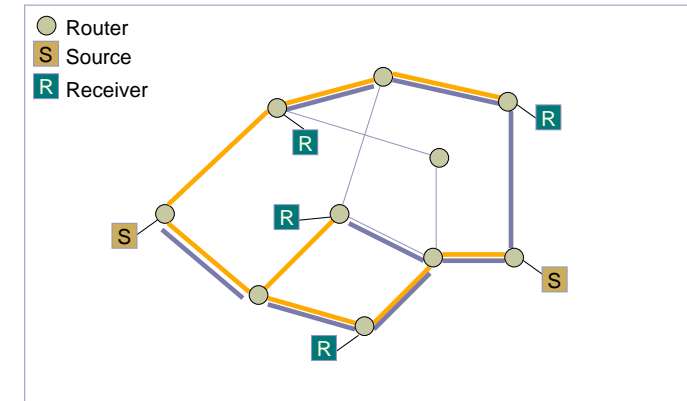

17

## Shared Tree

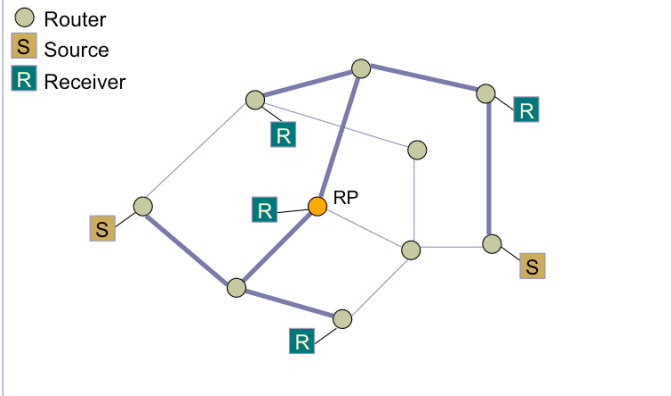

18

## Shared vs. Source-Based Trees



- Source-based trees
  - Shortest path trees – low delay, better load distribution
  - More state at routers (per-source state)
  - Efficient for in dense-area multicast
- Shared trees
  - Higher delay (bounded by factor of 2), traffic concentration
  - Choice of core affects efficiency
  - Per-group state at routers
  - Efficient for sparse-area multicast
- Which is better? → extra state in routers is bad!

19

## Routing Techniques



- Flood and prune
  - Begin by flooding traffic to entire network
  - Prune branches with no receivers
  - Examples: DVMRP, PIM-DM
  - *Unwanted state where there are no receivers*
- Link-state multicast protocols
  - Routers advertise groups for which they have receivers to entire network
  - Compute trees on demand
  - Example: MOSPF
  - *Unwanted state where there are no senders*

20

## Routing Techniques



- Core based protocols
  - Specify “meeting place” aka core
  - Sources send initial packets to core
  - Receivers join group at core
  - Requires mapping between multicast group address and “meeting place”
  - Examples: CBT, PIM-SM

21


## Distance-Vector Multicast Routing



- DVMRP consists of two major components:
  - A conventional distance-vector routing protocol (like RIP)
  - A protocol for determining how to forward multicast packets, based on the routing table
- DVMRP router forwards a packet if
  - The packet arrived from the link used to reach the source of the packet (reverse path forwarding check – RPF)
  - If downstream links have not pruned the tree


22

## Example Topology

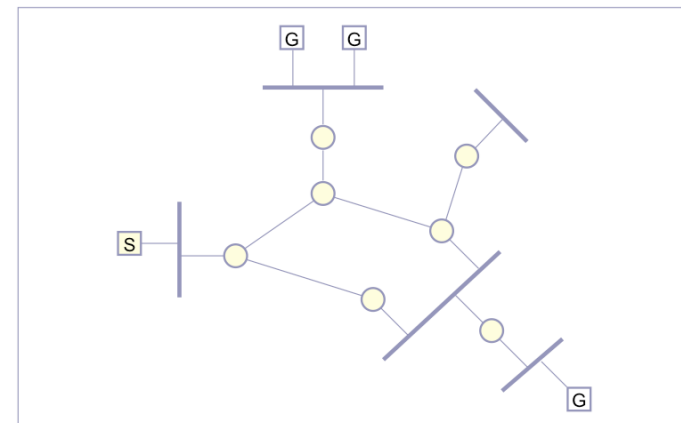


23

## Broadcast with Truncation


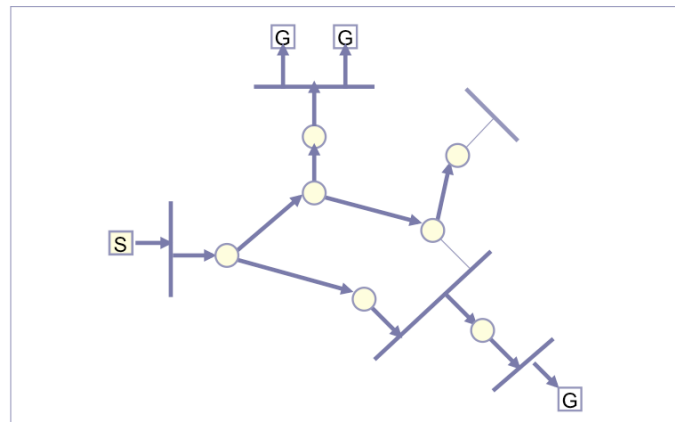


24


## Prune




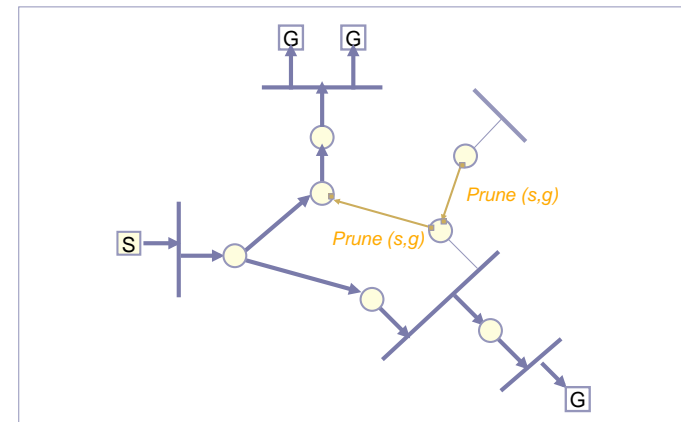


25

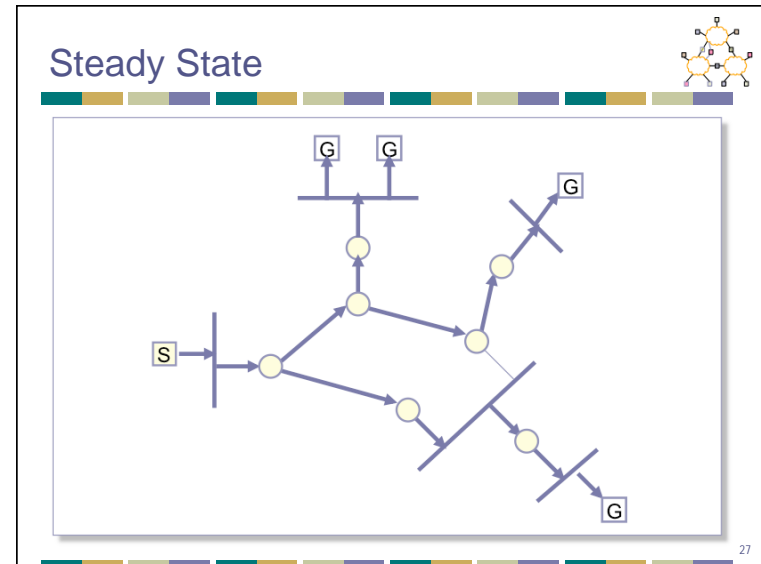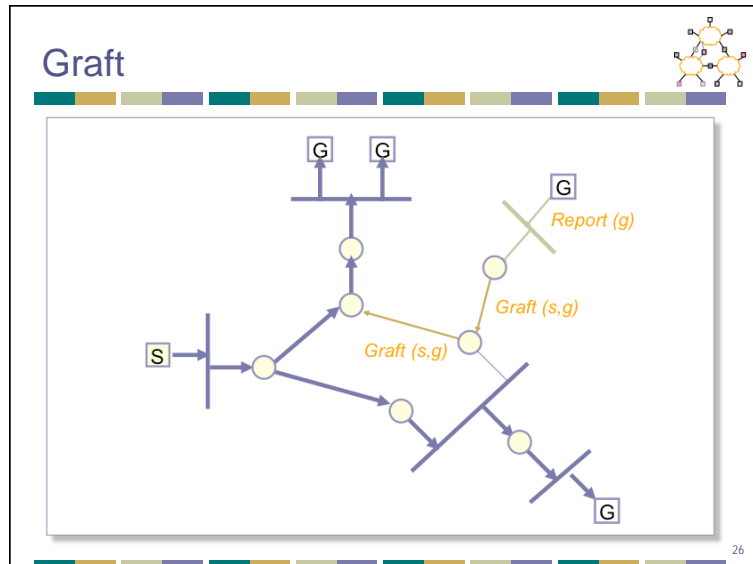

- ### Overview
- IP Multicast Service Basics
  - Multicast Routing Basics
  - **Overlay Multicast**
  - Reliability
  - Congestion Control

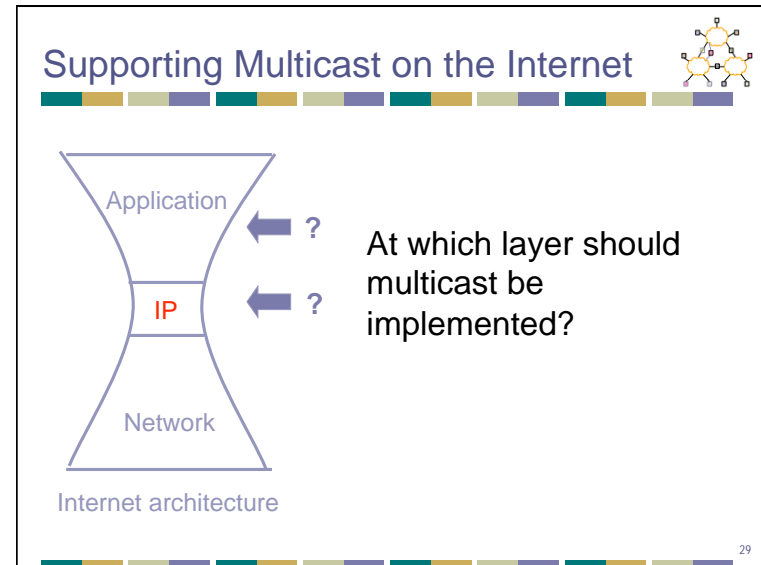

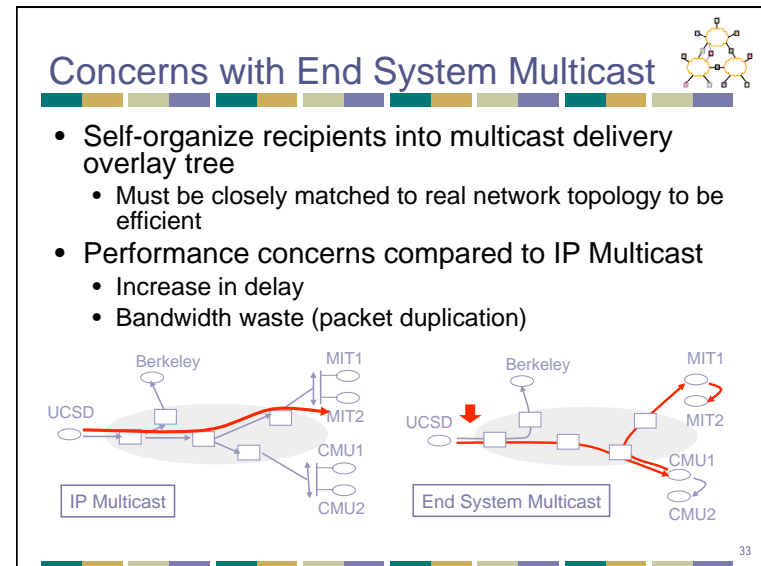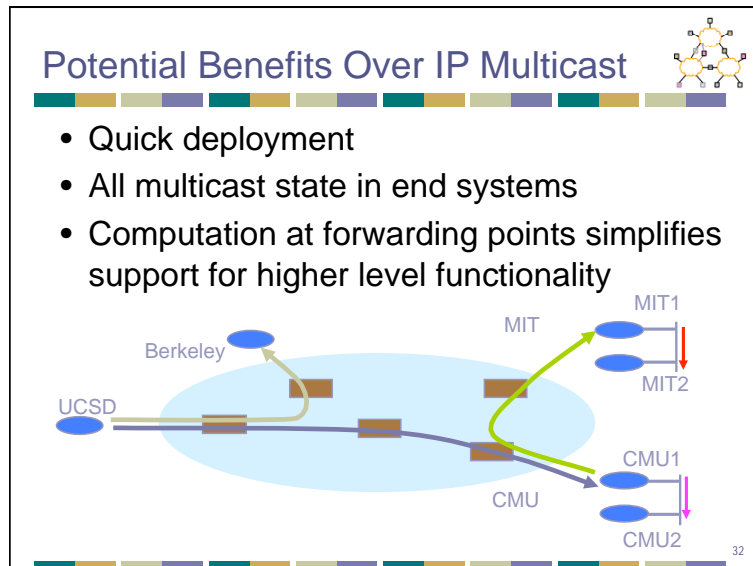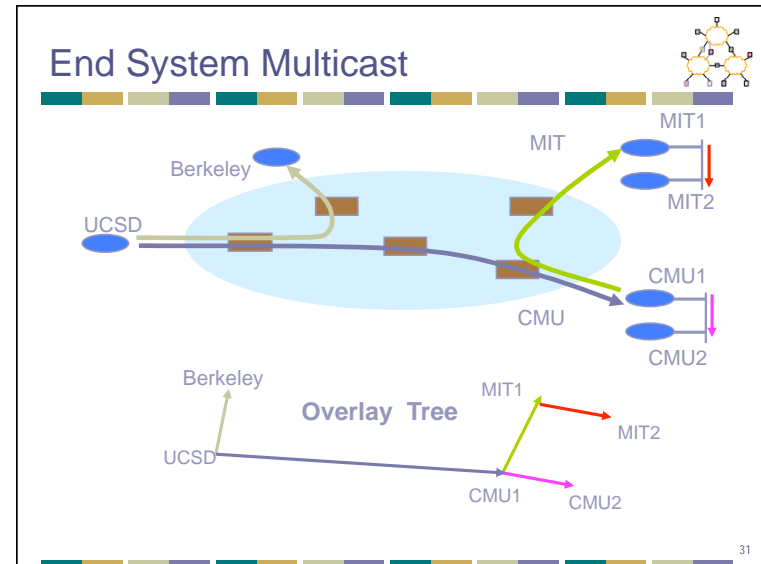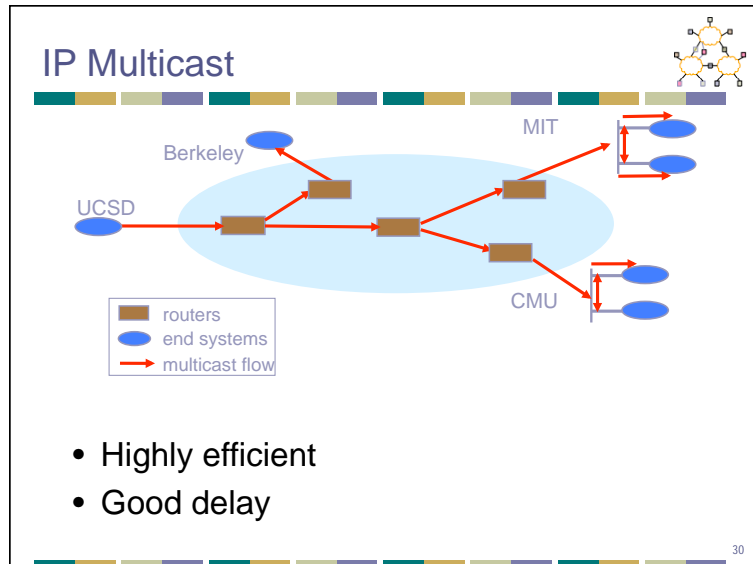




## Overview

- IP Multicast Service Basics
- Multicast Routing Basics
- Overlay Multicast
- Reliability
- Congestion Control


34

## Implosion

Packet 1 is lost

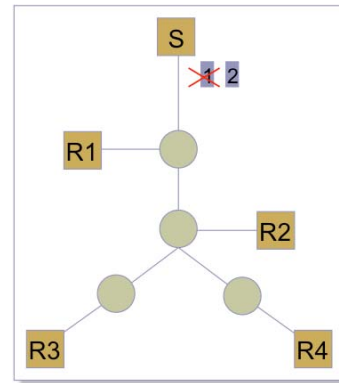

All 4 receivers request a resend

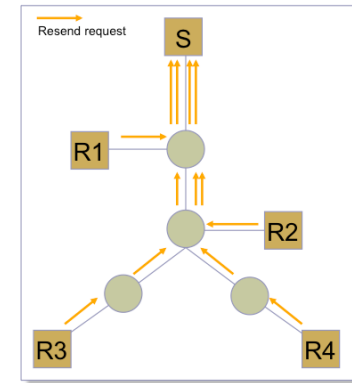

35


## Retransmission

- Re-transmitter
  - Options: sender, other receivers
- How to retransmit
  - Unicast, multicast, scoped multicast, retransmission group, ...
- Problem: Exposure


36

## Exposure

Packet 1 does not reach R1;  
Receiver 1 requests a resend

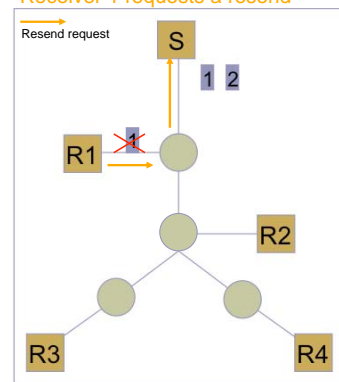


Packet 1 resent to all 4 receivers

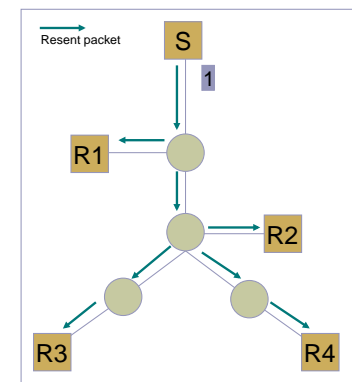


37

## Ideal Recovery Model

Packet 1 reaches R1 but is lost before reaching other Receivers

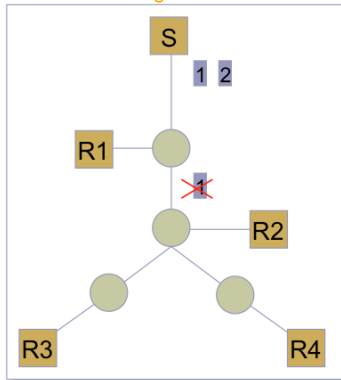

Only one receiver sends NACK to the nearest S or R with packet

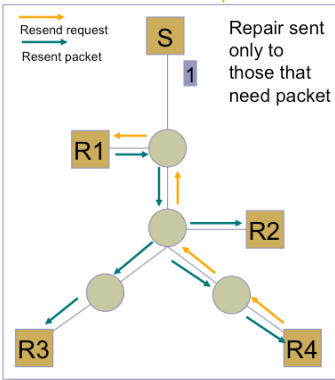

38


## Scalable Reliable Multicast (SRM)

- Originally designed for  $wb$
- Receiver-reliable
  - NACK-based
- Every member may multicast NACK or retransmission


39

## SRM Request Suppression

Packet 1 is lost; R1 requests resend to Source and Receivers

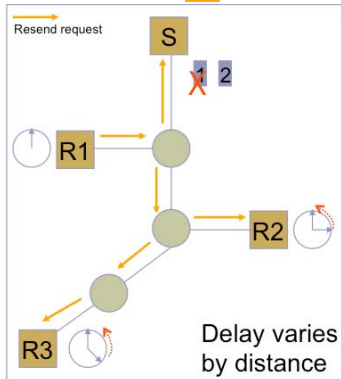


Packet 1 is resent; R2 and R3 no longer have to request a resend


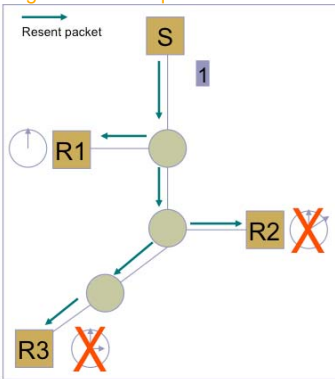


40

## Deterministic Suppression

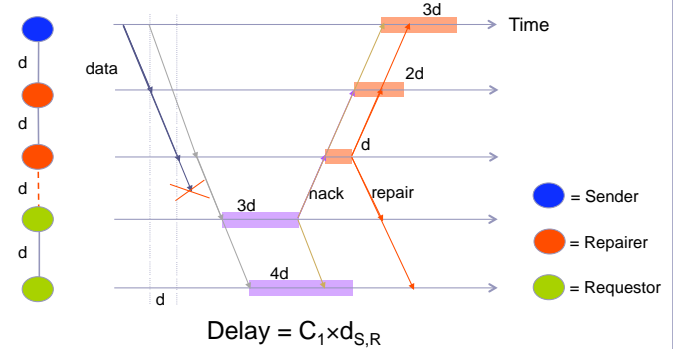

41

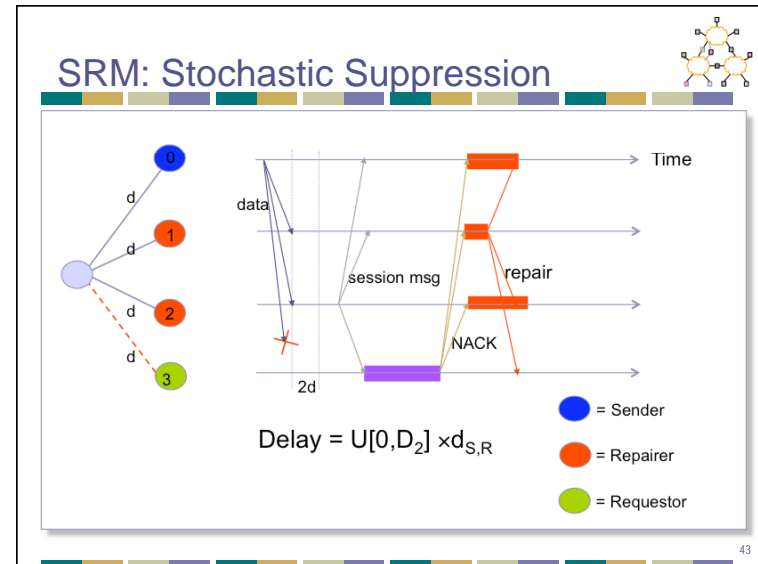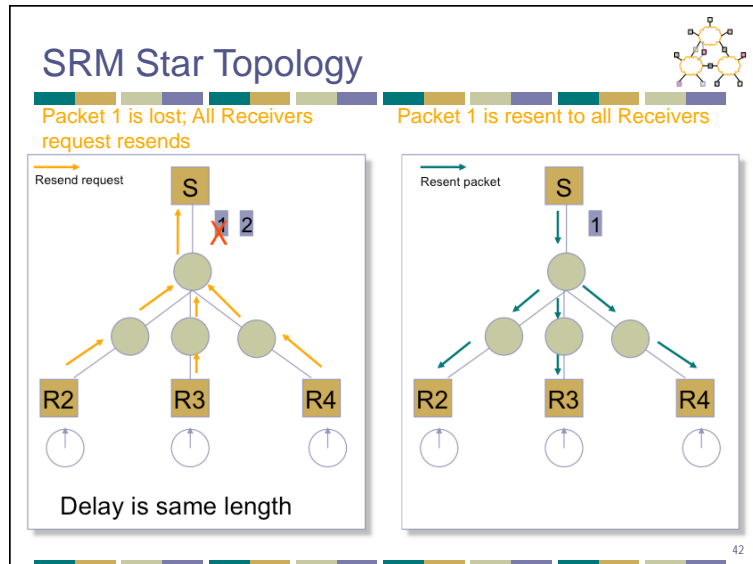


- ### SRM (Summary)
- NACK/Retransmission suppression
    - Delay before sending
    - Delay based on RTT estimation
    - Deterministic + Stochastic components
  - Periodic session messages
    - Full reliability
    - Estimation of distance matrix among members
- 44

- ### Overview
- IP Multicast Service Basics
  - Multicast Routing Basics
  - Overlay Multicast
  - Reliability
  - Congestion Control
- 45

## Multicast Congestion Control



- What if receivers have very different bandwidths?
- Send at max?
- Send at min?
- Send at avg?

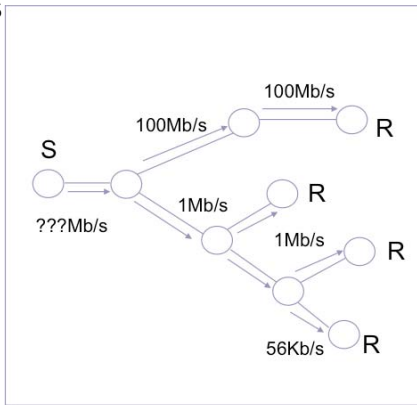

46


## Video Adaptation: RLM



- Receiver-driven Layered Multicast
- Layered video encoding
- Each layer uses its own mcast group
- On spare capacity, receivers add a layer
- On congestion, receivers drop a layer
- Join experiments used for shared learning

47

## Layered Media Streams

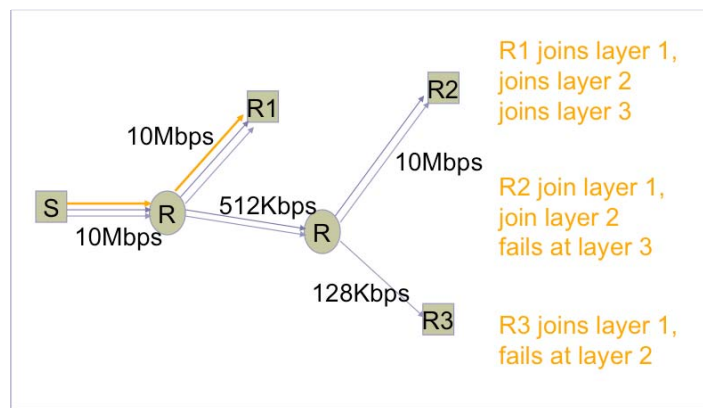

48


## Drop Policies for Layered Multicast



- Priority
  - Packets for low bandwidth layers are kept, drop queued packets for higher layers
  - Requires router support
- Uniform (e.g., drop tail, RED)
  - Packets arriving at congested router are dropped regardless of their layer
- Which is better?

49

## RLM Intuition

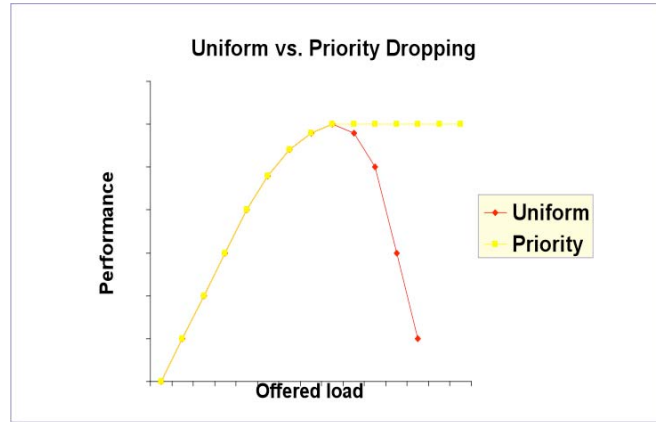

50

## RLM Intuition



- Uniform
  - Better incentives to well-behaved users
  - If oversend, performance rapidly degrades
  - Clearer congestion signal
  - Allows shared learning
- Priority
  - Can waste upstream resources
  - Hard to deploy
- RLM approaches optimal operating point
  - Uniform is already deployed
  - Assume no special router support

51


## RLM Join Experiment



- Receivers periodically try subscribing to higher layer
- If enough capacity, no congestion, no drops  
→ Keep layer (& try next layer)
- If not enough capacity, congestion, drops  
→ Drop layer (& increase time to next retry)
- What about impact on other receivers?

52

## Join Experiments

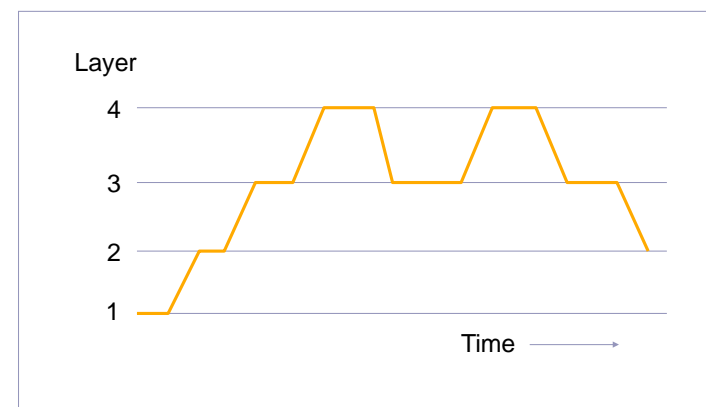

53

## RLM Scalability?



- What happens with more receivers?
- Increased frequency of experiments?
  - More likely to conflict (false signals)
  - Network spends more time congested
- Reduce # of experiments per host?
  - Takes longer to converge
- Receivers coordinate to improve behavior