

UNIT 12A

The Internet: Fundamentals

15110 Principles of Computing, Carnegie
Mellon University - CORTINA

1


What is the Internet?

- The Internet is a system to deliver data (bits) from one computational device to another.
- No one entity controls/owns the Internet.
- The Internet is governed by protocols and standards that are commonly agreed to by developers of network software and applications.
- Started at ARPANET in 1969 for DARPA
UCLA, Stanford Research Institute, UCSB, U. of Utah

15110 Principles of Computing, Carnegie
Mellon University - CORTINA

2

ARPANET

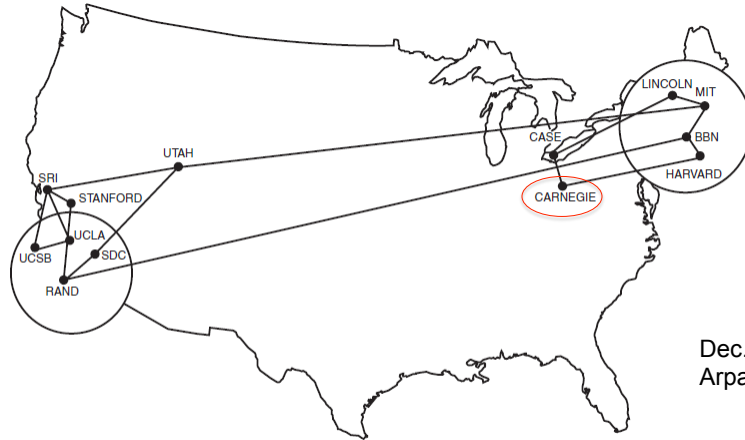

Dec. 1970
Arpanet

Source: Heart, F., McKenzie, A., McQuillan, J., and Walden, D., ARPANET Completion Report, Bolt, Beranek and Newman, Burlington, MA, January 4, 1978.


ARPANET

Interface Message Processor
(interface to ARPANET)



IBM System 360/60

Digital PDP-10

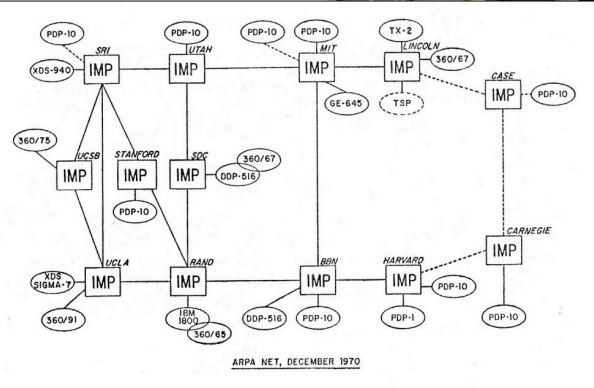


The Internet

In 1984, the US military portion of the ARPANet was broken off as a separate network, the MILNET.

During the 1980s, the connections expanded to more educational institutions and companies

The National Science Foundation (NSF), became heavily involved in the Internet in the mid 1980s.

The NSFNet backbone, intended to connect and provide access to a number of supercomputing centers established by the NSF, was established in 1986, and became the Internet by the end of the 1980s.



<http://internet-map.net/>

15110 Principles of Computing, Carnegie Mellon University - CORTINA

5

Structure of the Internet


- Core
 - routers
 - gateways
 - Internet Service Providers (ISP' s)
 - domain name servers
- Edges
 - individual users
 - private networks

15110 Principles of Computing, Carnegie Mellon University - CORTINA

6

Circuit Switching

- Two network nodes (e.g. phones) establish a dedicated connection via one or more switching stations.

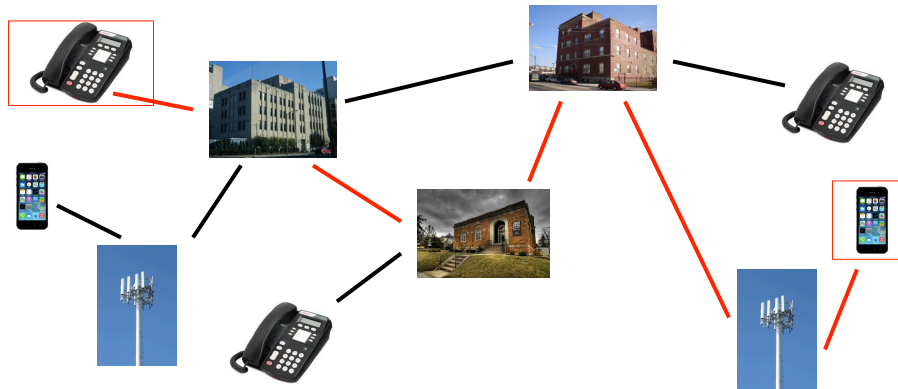

15110 Principles of Computing, Carnegie Mellon University - CORTINA


7

Packet Switching

- Two network nodes (e.g. computers) send messages by breaking the message up into small packets and sending each packet on to the network with a serial number and a destination address.
- Routers in the network use a buffer (queue) to hold packets until they can be routed toward their destination.
- Packets may be received at the destination in any order and may get lost and retransmitted. Serial numbers are used to put packets back into order at the destination.

15110 Principles of Computing, Carnegie Mellon University - CORTINA

8

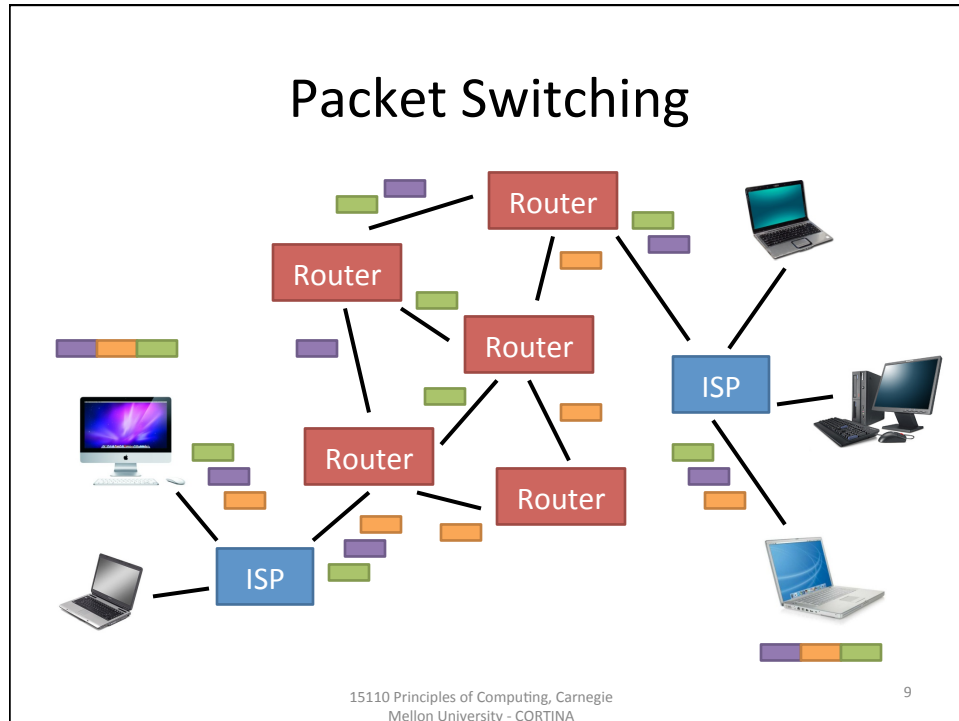


IP Addresses (IPv4)

- Computers on the internet are assigned an IP Address
 _____ . _____ . _____ . _____
 Four numbers between 0 and 255, inclusive.
 Example: 128.2.13.163
- This means that each part of the address is an 8-bit value, and an IP address is 32 bits.
 → supports up to 2^{32} computers on the network at the same time
- ISPs can reassign IP addresses dynamically.

Network Address Translation (NAT)

- To accommodate more users on the Internet, NAT is used.
- The gateway assigns an additional code called a port for each user. Packets are tagged with the port.
- The gateway knows where to route the messages on the private network, but all messages from that private network share the same single IP address.

Network Address Translation (NAT)

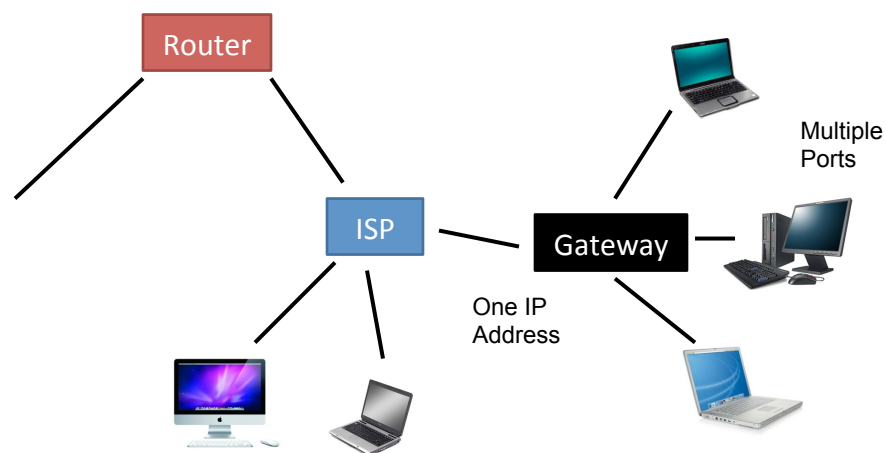

New IP (IPv6)

- IPv6 uses 128-bit addresses
 - supports 2^{128} unique computer addresses
 - = 3.4×10^{38}
- Allows for many more devices (cell phones, video game machines, appliances, automobiles, etc.)
- Designed to deal with the use of all available addresses in IPv4.

ISPs

- An Internet Service Provider (ISP) is a company that provides access for users to the Internet.
 - AT&T, Comcast, EarthLink, Verizon, etc.
 - access can be provided via copper cable, wireless transmission, fiber optic cable, etc.
 - In rural areas, an ISP may be a company providing Internet services by satellite, balloon, glider, etc.
 - Universities (like CMU) and big companies (like Google and Microsoft) are their own ISPs.

Internet Protocol (IP)

- A *protocol* is a standard for communicating messages between networked computers.
- An IP address in each packet determine the intended destination of the packet.
- A domain name server translates machine names to equivalent IP addresses to make it easier for users to indicate message destinations.
 - Example: `www.cnn.com`, `unix.andrew.cmu.edu`, `employees.verizon.net`

Transfer Control Protocol (TCP)

- TCP is the main protocol used on the Internet to transmit messages using packets.
 - used for the web, email and file transfer
- TCP can detect if a packet is lost, delivered out of order or duplicated.
- TCP is optimized for accurate delivery rather than timely delivery.
 - For streaming data, other protocols are used (e.g. UDP) where packet loss is not as critical.

TCP and “Handshaking”

- The process of two parties determine that each has received the other's transmission correctly is called *handshaking*.
 - Alice sends several packets to Bob using TCP.
 - Each packet includes parity information so Bob can check its accuracy.
 - When Bob receives a packet, if it is ok, Bob sends an acknowledgement packet back to Alice.
 - If Bob is missing a packet, he can send a request for a retransmission of the packet.
 - If Alice doesn't get an acknowledgement within a set period of time, she can retransmit the packet.

Routers


- Routers are considered to be very simple devices whose sole purpose is to route data traffic.
- The end-to-end principle in the Internet
- Routers only implement IP by routing packets. It is up to the end units to run the more involved TCP to check for transmission errors, omissions and duplications.

Fault Tolerance

- The Internet is subject to faults at individual nodes. The protocols are designed to allow data traffic to be rerouted if nodes go down or become too overloaded.
 - World Trade Center Attack (9/11/2001)
 - New Orleans & Hurricane Katrina (2005)
 - Hanchung earthquake (2006)
 - Qatar Internet blackout (2008)

Communications Protocol

- agreement between parties to control how communication proceeds
 - syntax: how are the messages' contents organized?
 - semantics: what do the messages mean?
 - synchronization: when are messages sent?
- sometimes standardized as a "Request for Comments (RFC)" by the Internet Engineering Task Force (IETF)

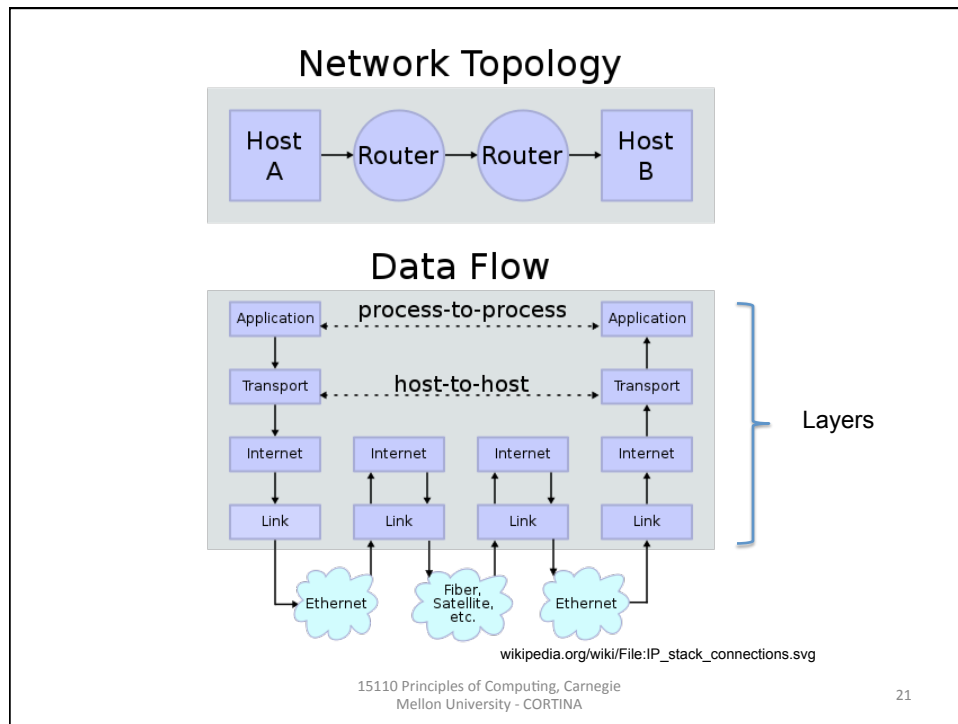

Layers of the TCP/IP Reference Model

- **Application Layer**
 - Handles requests from the user for data on the Internet.
- **Transport Layer**
 - Handles splitting messages into packets for delivery.
- **Internet Layer**
 - Handles the task of sending packets across one or more networks.
- **Link Layer**
 - Handles the physical transfer and reception of bits.


TCP/UDP vs IP

- **Internet Protocol (IP)**
 - delivers packets to IP address
 - best effort delivery
- **User Datagram Protocol (UDP)**
 - delivers packets to port at IP address
 - port identifies
 - still best effort delivery
- **Transmission Control Protocol (TCP)**
 - creates a reliable bi-directional stream (source address/port and destination address/port)
 - acknowledgements, resend, reassembly in correct order,
 - error detection
 - connection must be opened and closed (established with three-way handshake)
 - flow/congestion control

15110 Principles of Computing, Carnegie Mellon University - CORTINA

23

Examples of Protocols

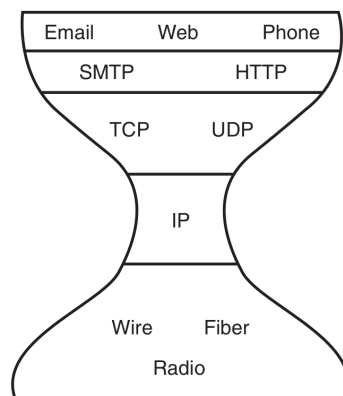


- **Application**

- Hypertext Transfer Protocol (HTTP)
- Simple Mail Transfer Protocol (SMTP)
- Domain Name System (DNS)
 - XYZ.com → w.x.y.z
- Secure Shell (SSH) Protocol
 - ssh unix.andrew.cmu.edu
- Voice Over IP (Phone calls)
 - Session Initiation Protocol (SIP)
 - Real-time Transport Protocol (RTP)

15110 Principles of Computing, Carnegie Mellon University - CORTINA

24

Examples of Protocols

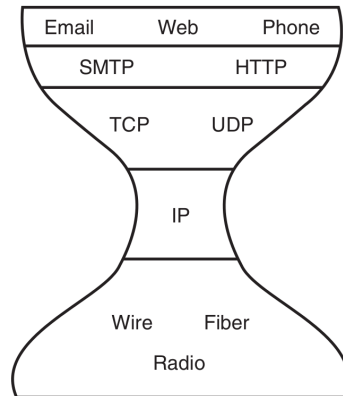


- **Transport**

- Transmission Control Protocol (TCP)
- User Datagram Protocol (UDP)

- **Internet**

- IPv4
- IPv6

Examples of Protocols

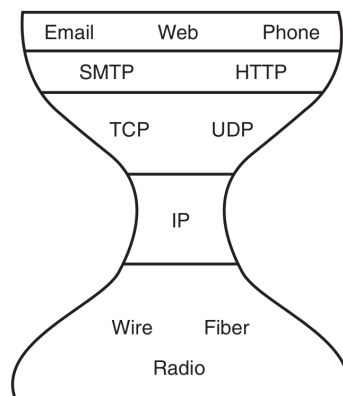

- **Link**

- 1000BaseT
- Gigabit Ethernet
- Data Over Cable Service Interface Specification
- Cable Modems
- Long Term Evolution (LTE)
- 4G cell phone
- 802.11N (Wi-Fi) – Wireless Ethernet

Net Neutrality

- "Net neutrality means simply that all like Internet content must be treated alike and move at the same speed over the network. The owners of the Internet's wires cannot discriminate. This is the simple but brilliant "end-to-end" design of the Internet that has made it such a powerful force for economic and social good. "
 - Lawrence Lessig and Robert W. McChesney (Washington Post, 6/08/2006)
- The Battle Ensues:
 - 2010: FCC adopts Net Neutrality rules to protect free speech online
 - 2014: Overturned: insufficient regulatory powers over broadband
 - 2015: FCC reclassifies broadband, adopts Net Neutrality rules
 - 2017: FCC eliminates Net Neutrality rules to spur ISP innovation