



# Recap

- Python's asyncio module provides an event loop but no events.
- The Cozmo SDK provides events, actions (with failure detection and automatic retry), and an event dispatcher.
- But this is still cumbersome to use. Sequencing must be hand-coded. Some actions are asynchronous; some are not.
- Solution: cozmo-tools state machines.


# What Is A Finite State Machine?

A classic finite state machine consists of:

- A set of discrete states  $\{s_i\}$ .
- A distinguished start state  $s_0$ .
- A set of transitions  $\{s_i \xrightarrow{c} s_j\}$ .
- Each transition has a condition  $c$  that determines when the transition can apply.

# State Machines Are Graphs

- The states are nodes.
- The transitions are labeled links.

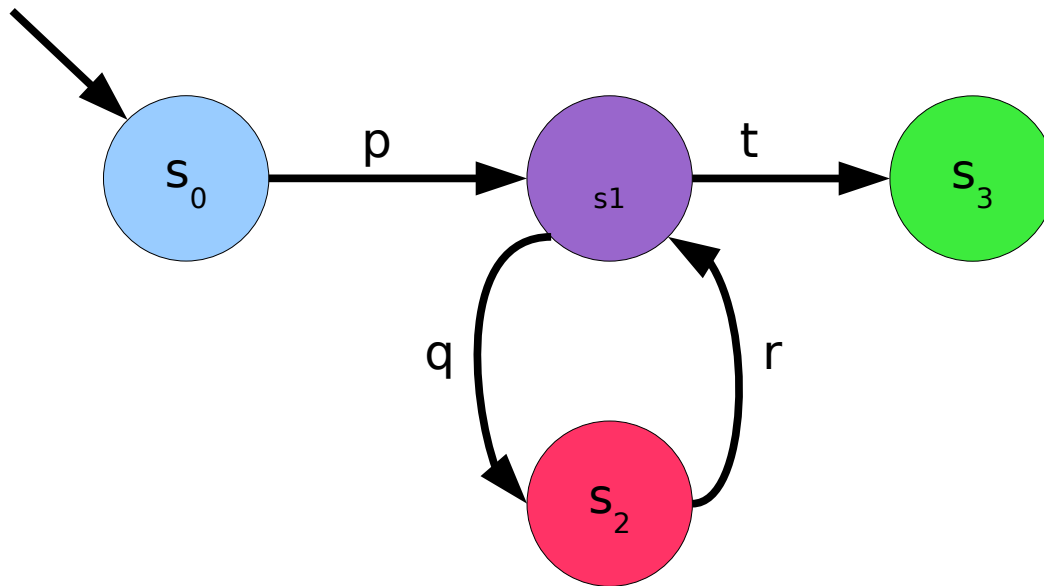

# FSMs in Robot Programming

- State machines are widely used in robot programming, from LEGO Mindstorms (NXT-G) to ROS (Smach).
- In robotics:
  - Nodes specify *actions*.
  - Transitions specify *reactions* (to events).
  - Events may be associated with an action, e.g., completion or failure.
  - Events can also be external, e.g., a face appeared in the camera image.


# Advantages of FSMs

- Separates the control logic (links) from the functionality (nodes).
- The control logic can be expressed concisely as a graph.
- Provides an easy way to handle control problems such as:
  - fork/join
  - randomness
  - timeouts
- Easy way to trace execution.

# Event-Driven Architecture


- Robots typically use an event-driven architecture with many types of events.
- Nodes can generate events.
- The robot's sensors can also generate events.
- Transitions *listen for events* to determine when they should fire. (Nodes can also listen for events if they want to.)
- In `cozmo_fsm`, both `StateNode` and `Transition` are subclasses of `EventListener`.

Transition firing activates state node Look.

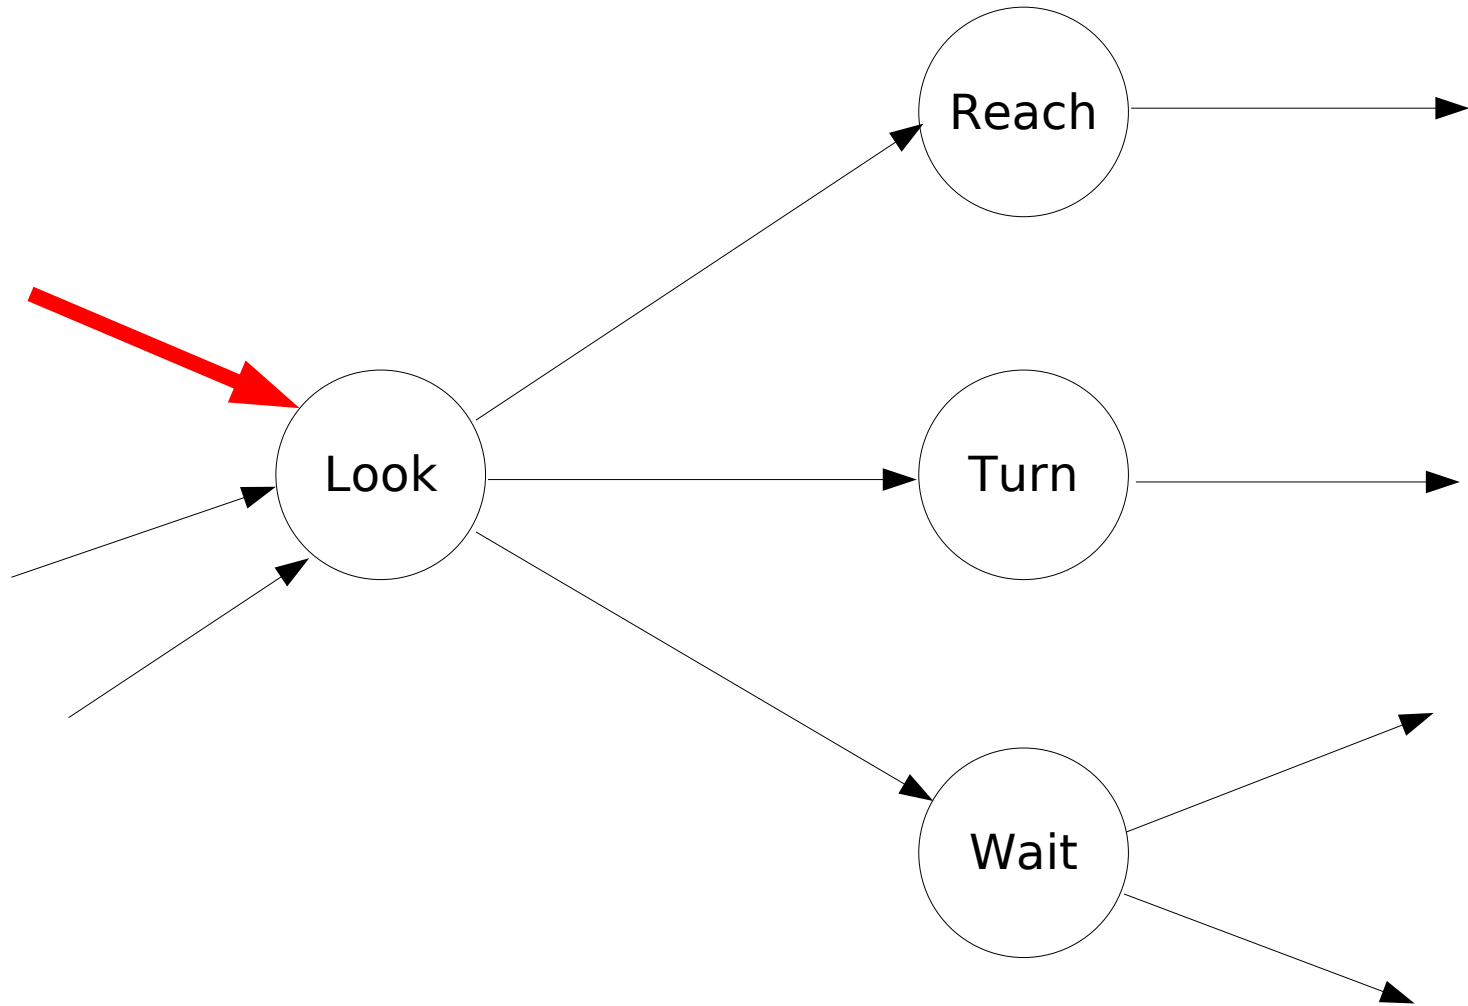





Look's start() method calls StateNode's start() method.

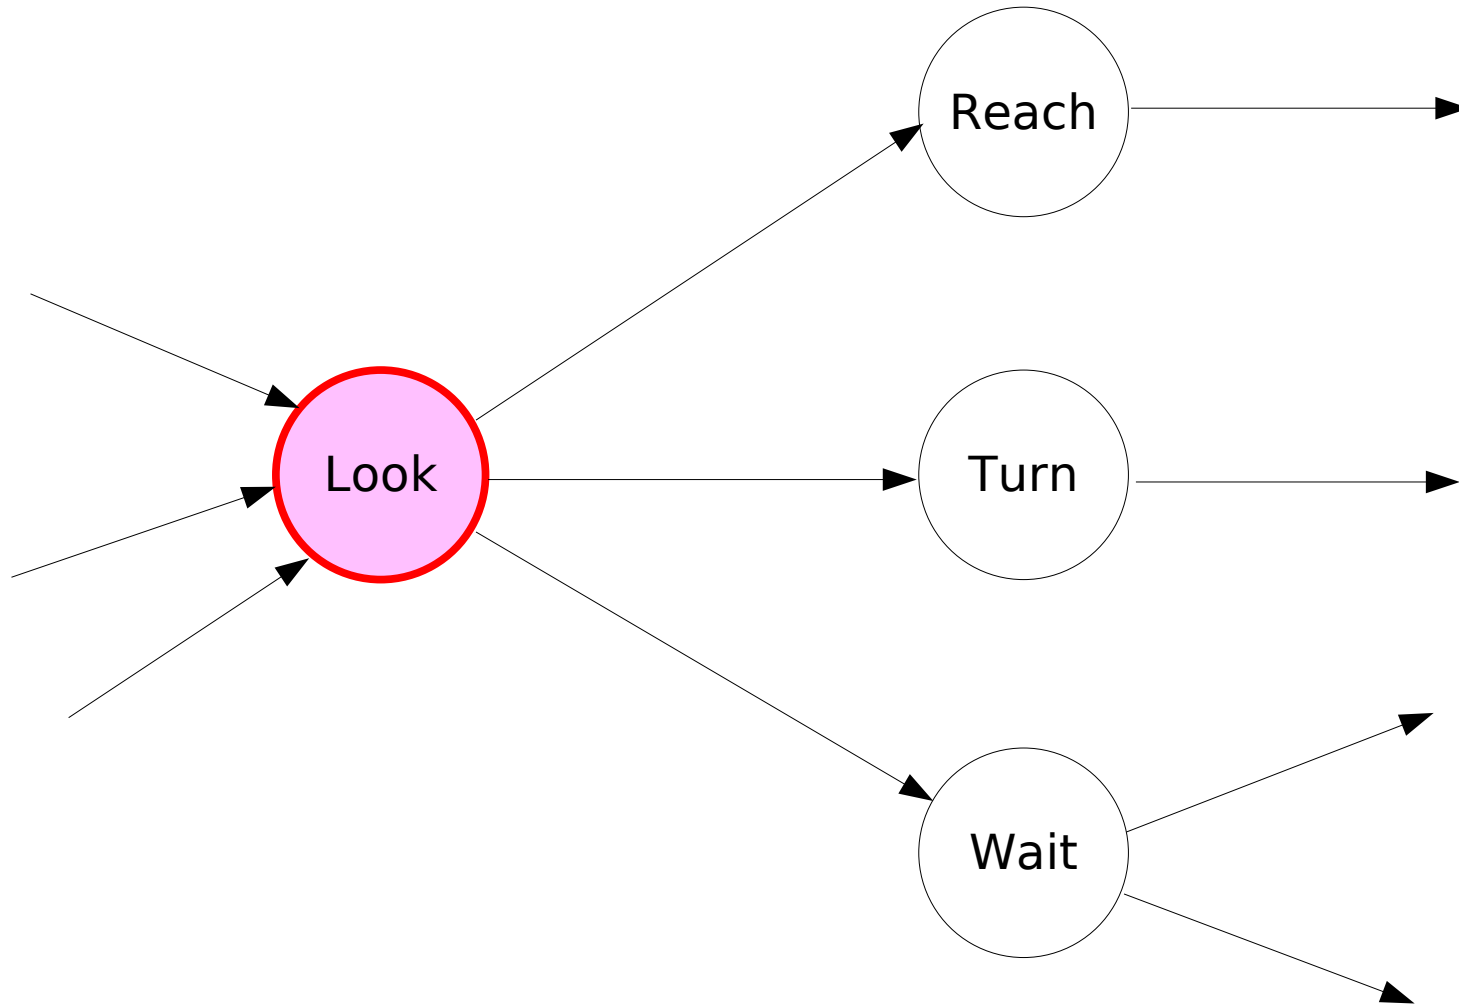


Look's outgoing transitions become active and begin listening for events.

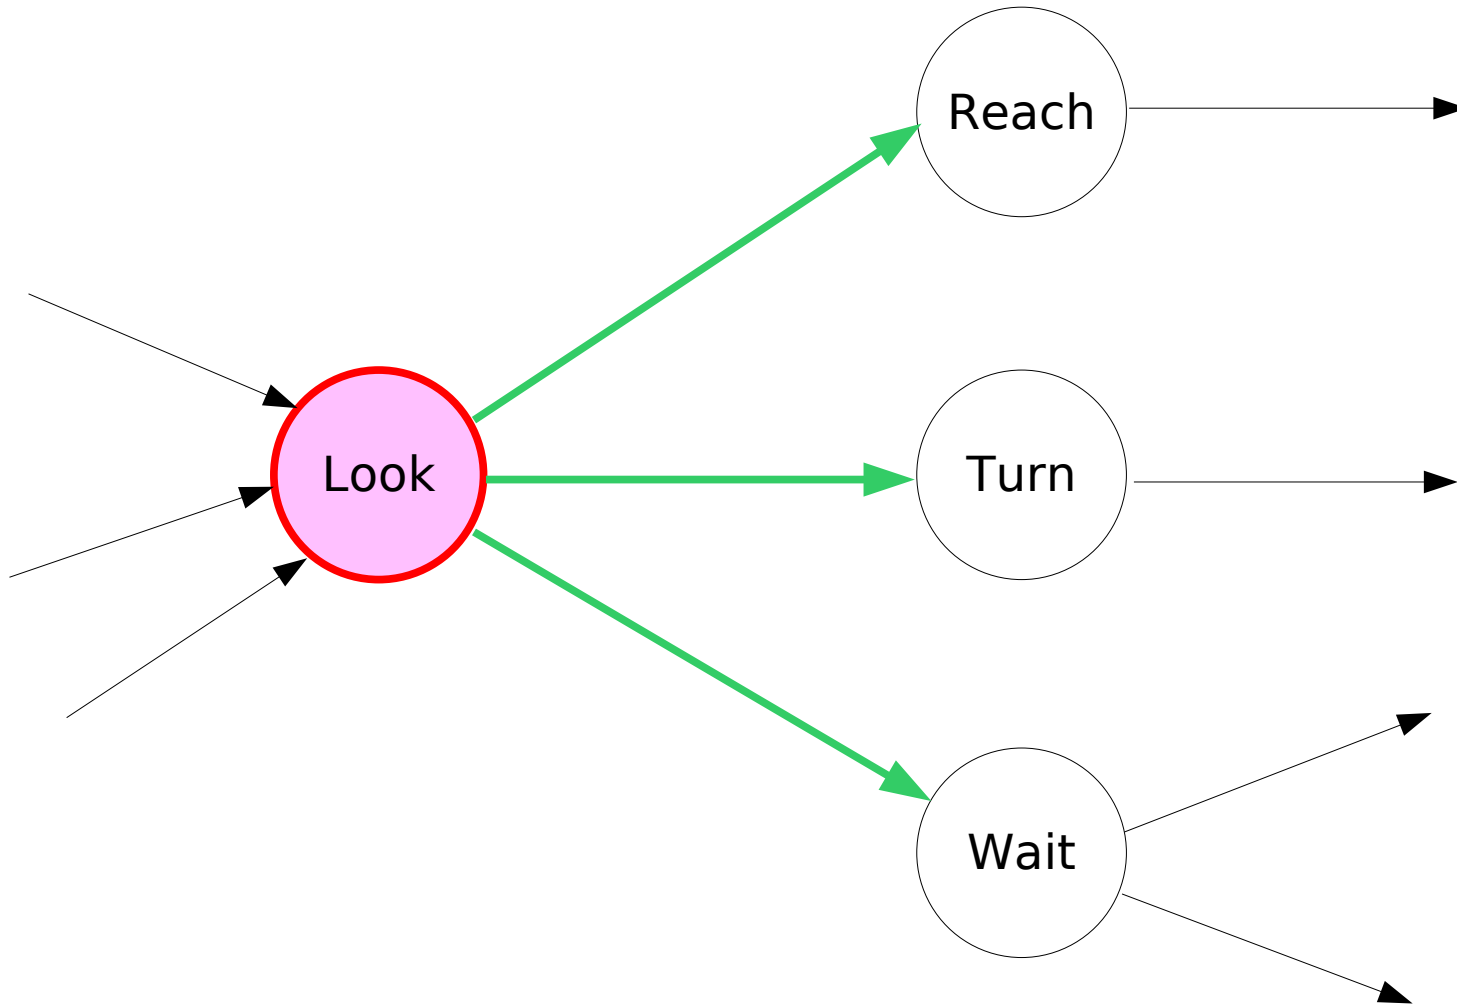


Random things happen....

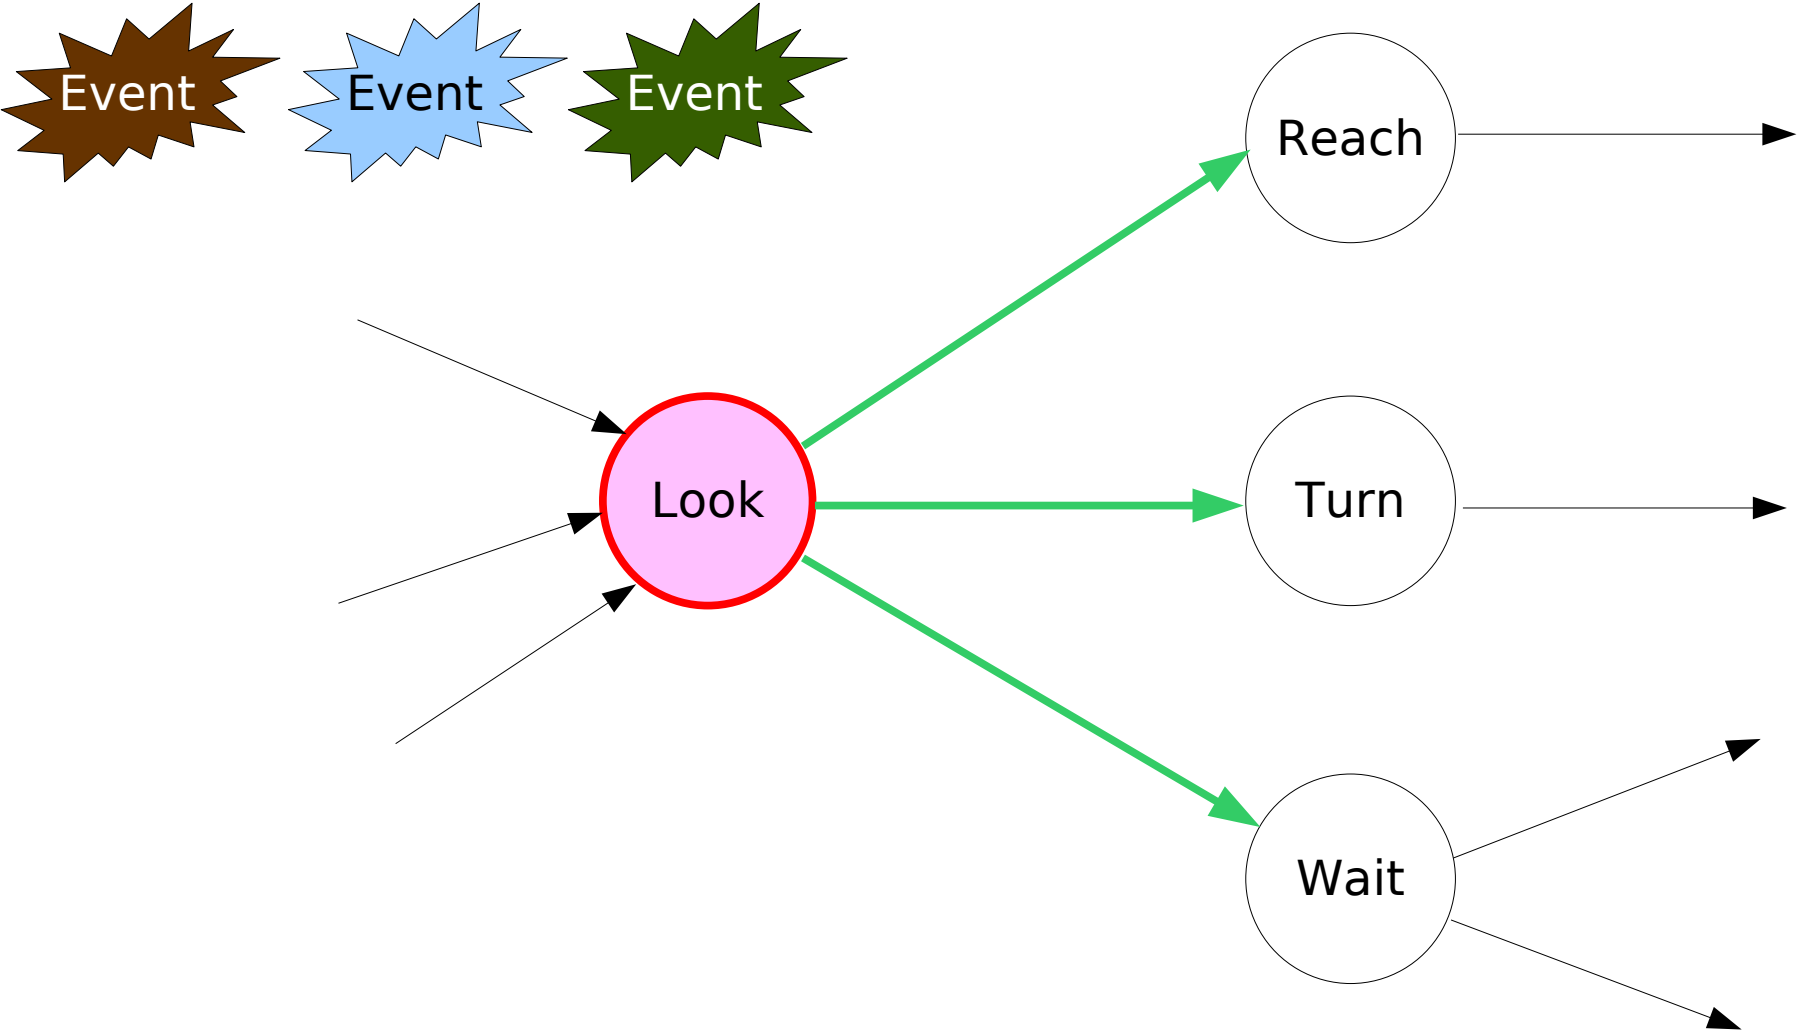


And then, something we've been looking for...

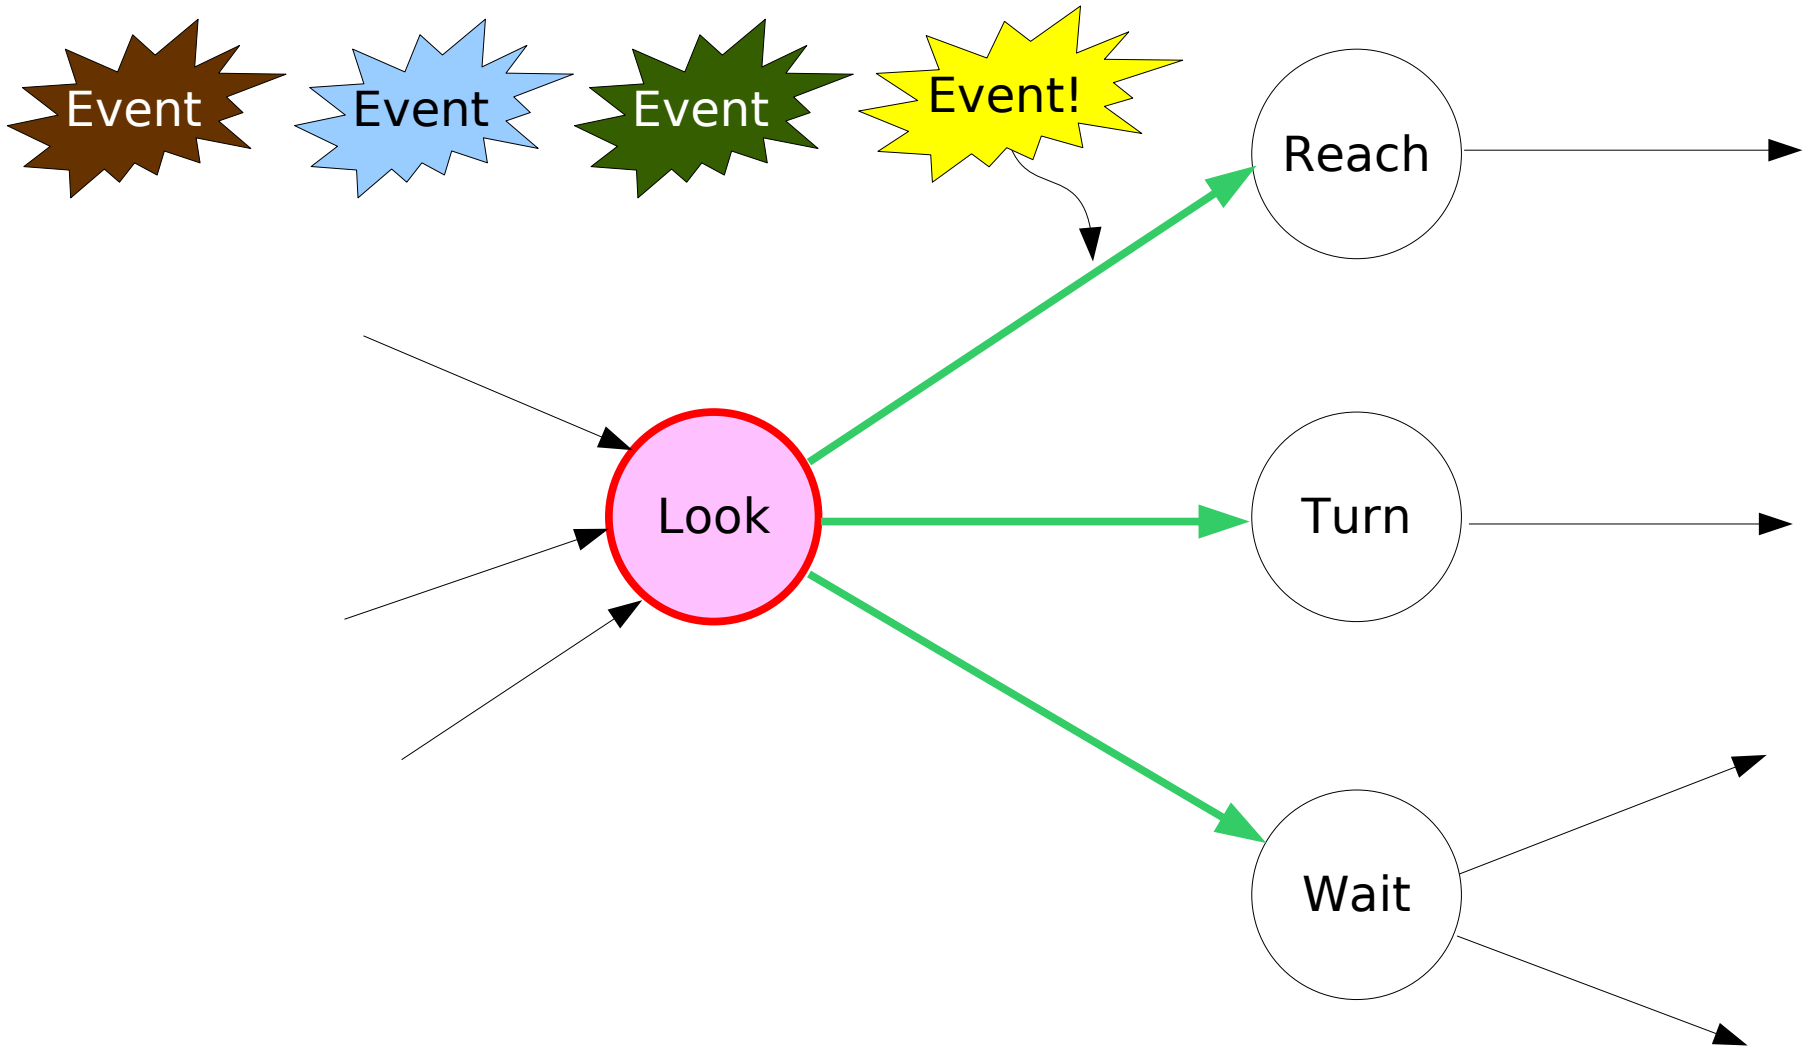


Transition decides to fire.

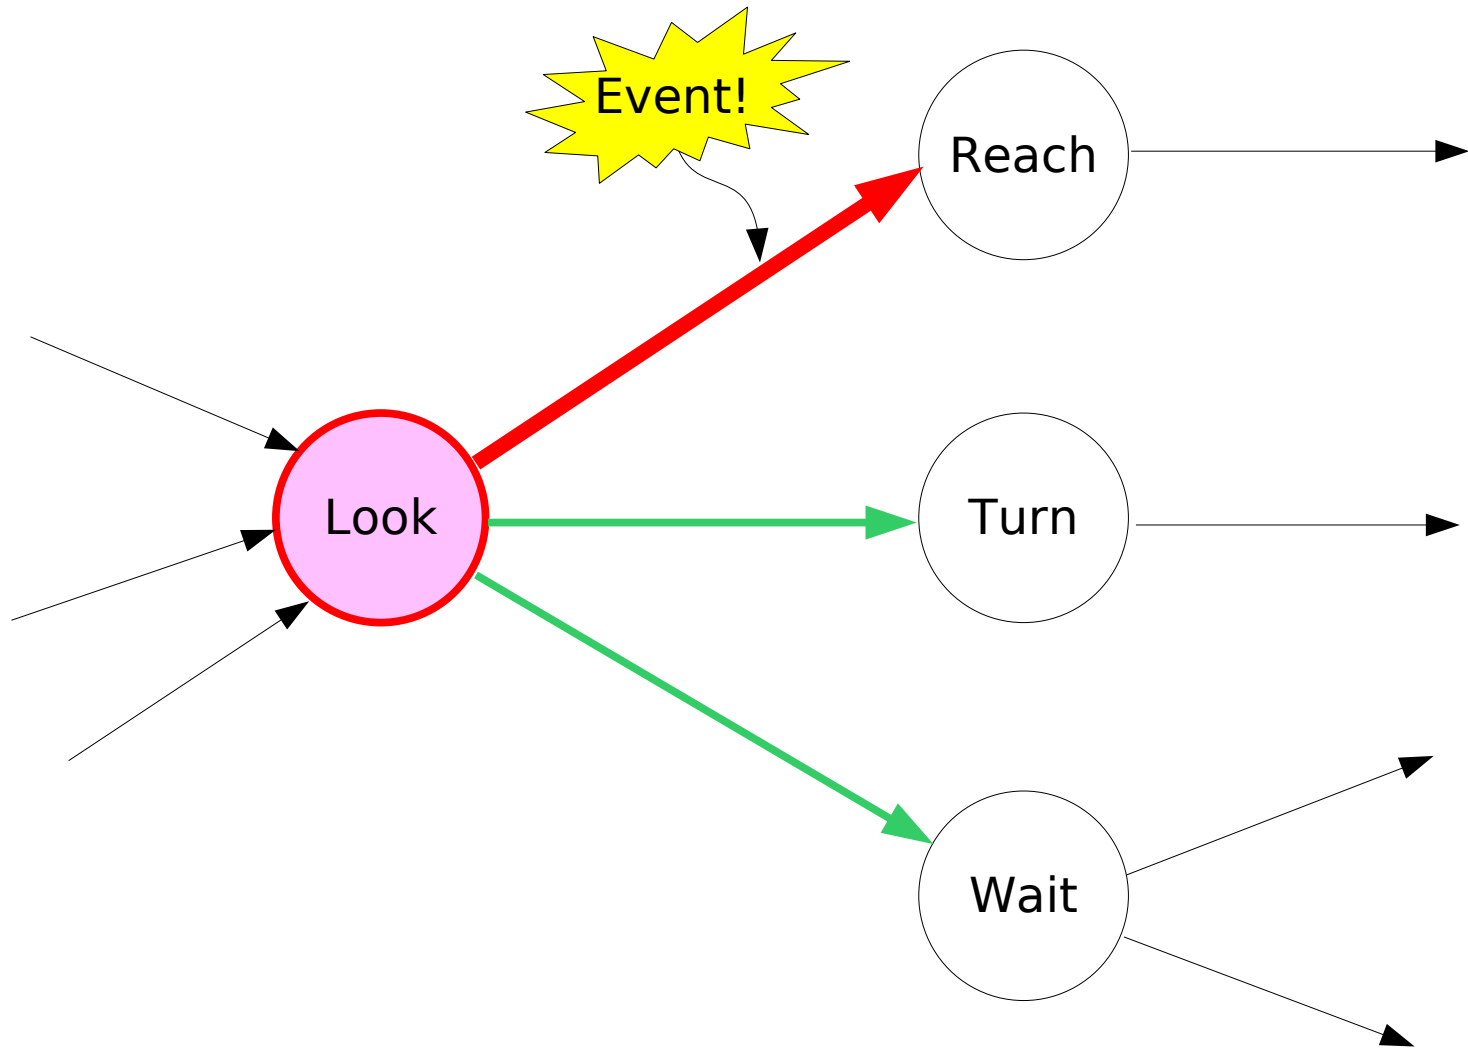


Transition deactivates the source node, Look.

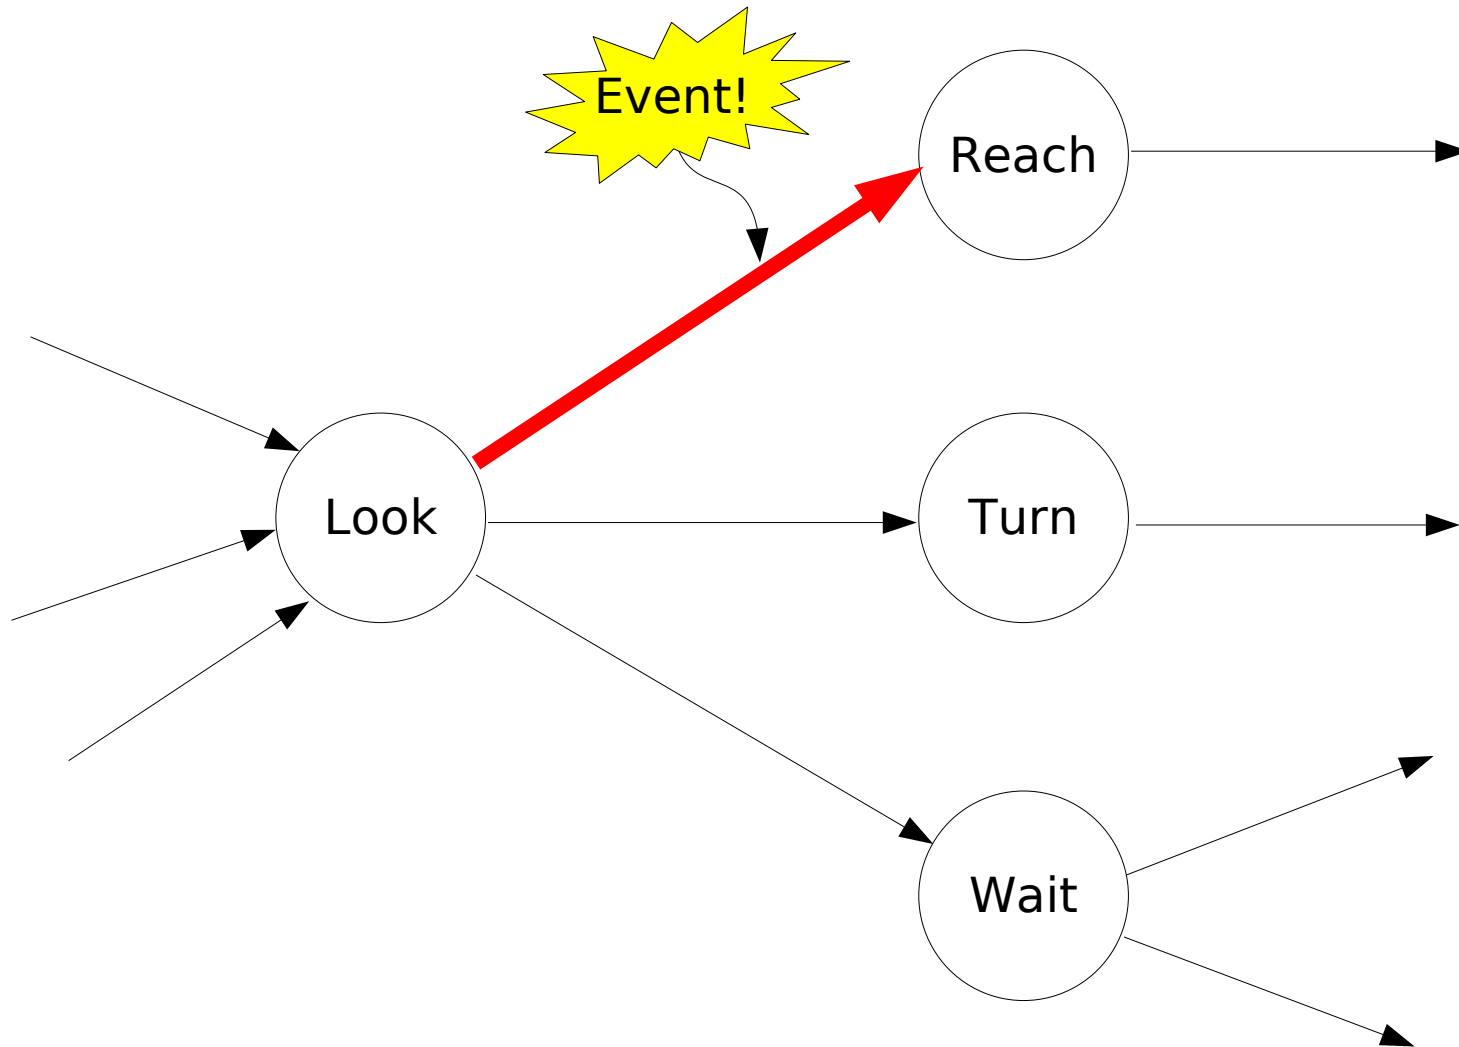

Transition activates the target node, Reach.

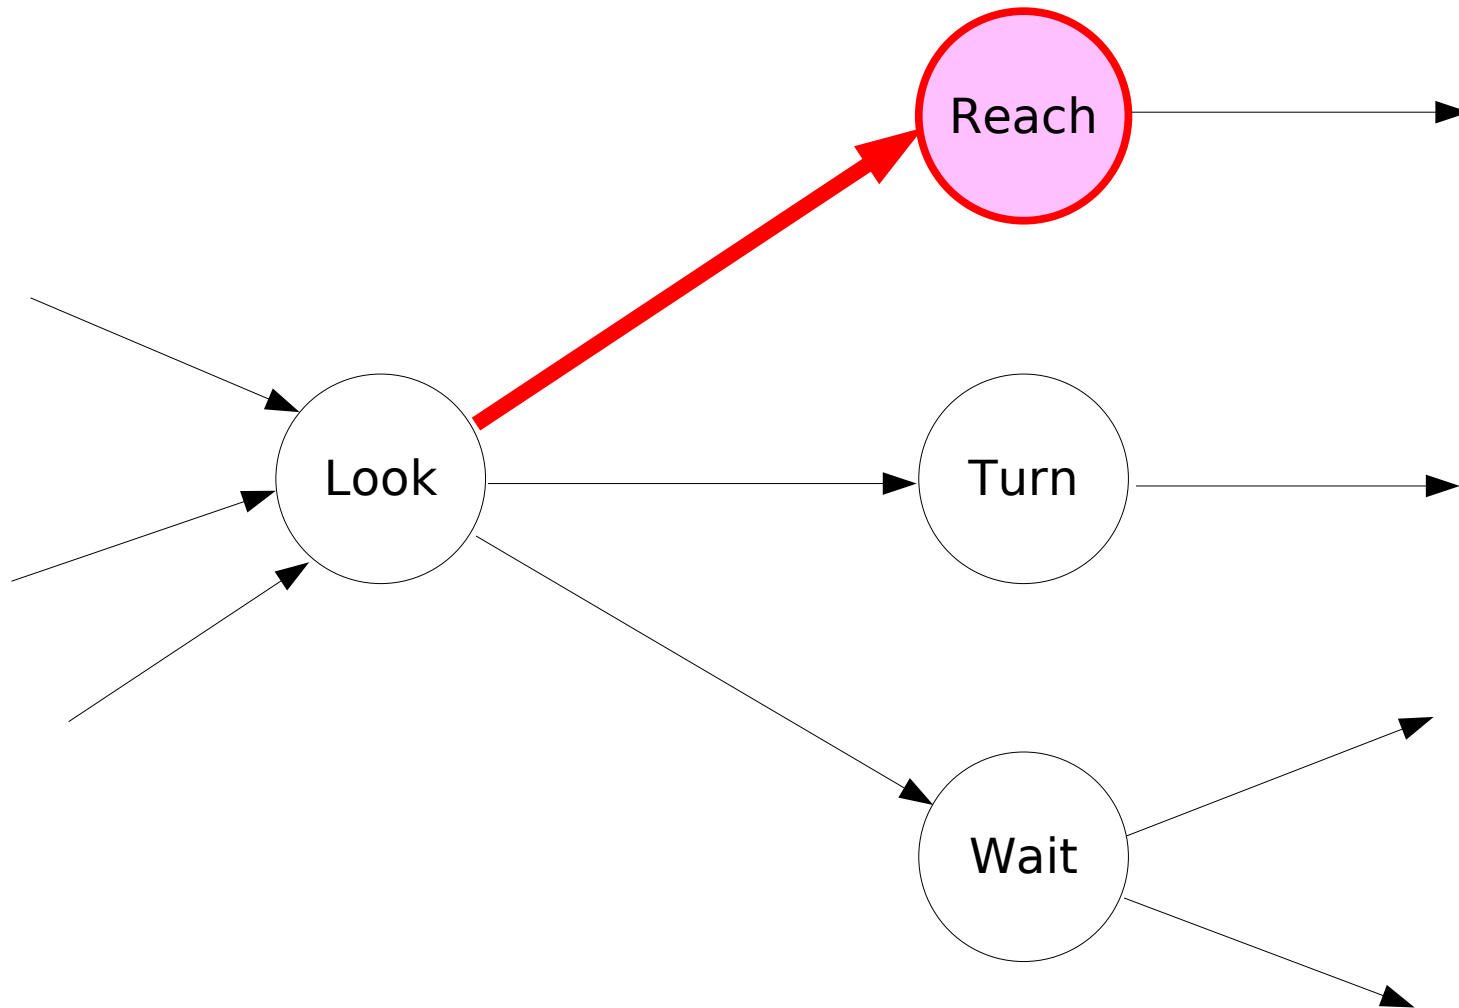


Transition deactivates.

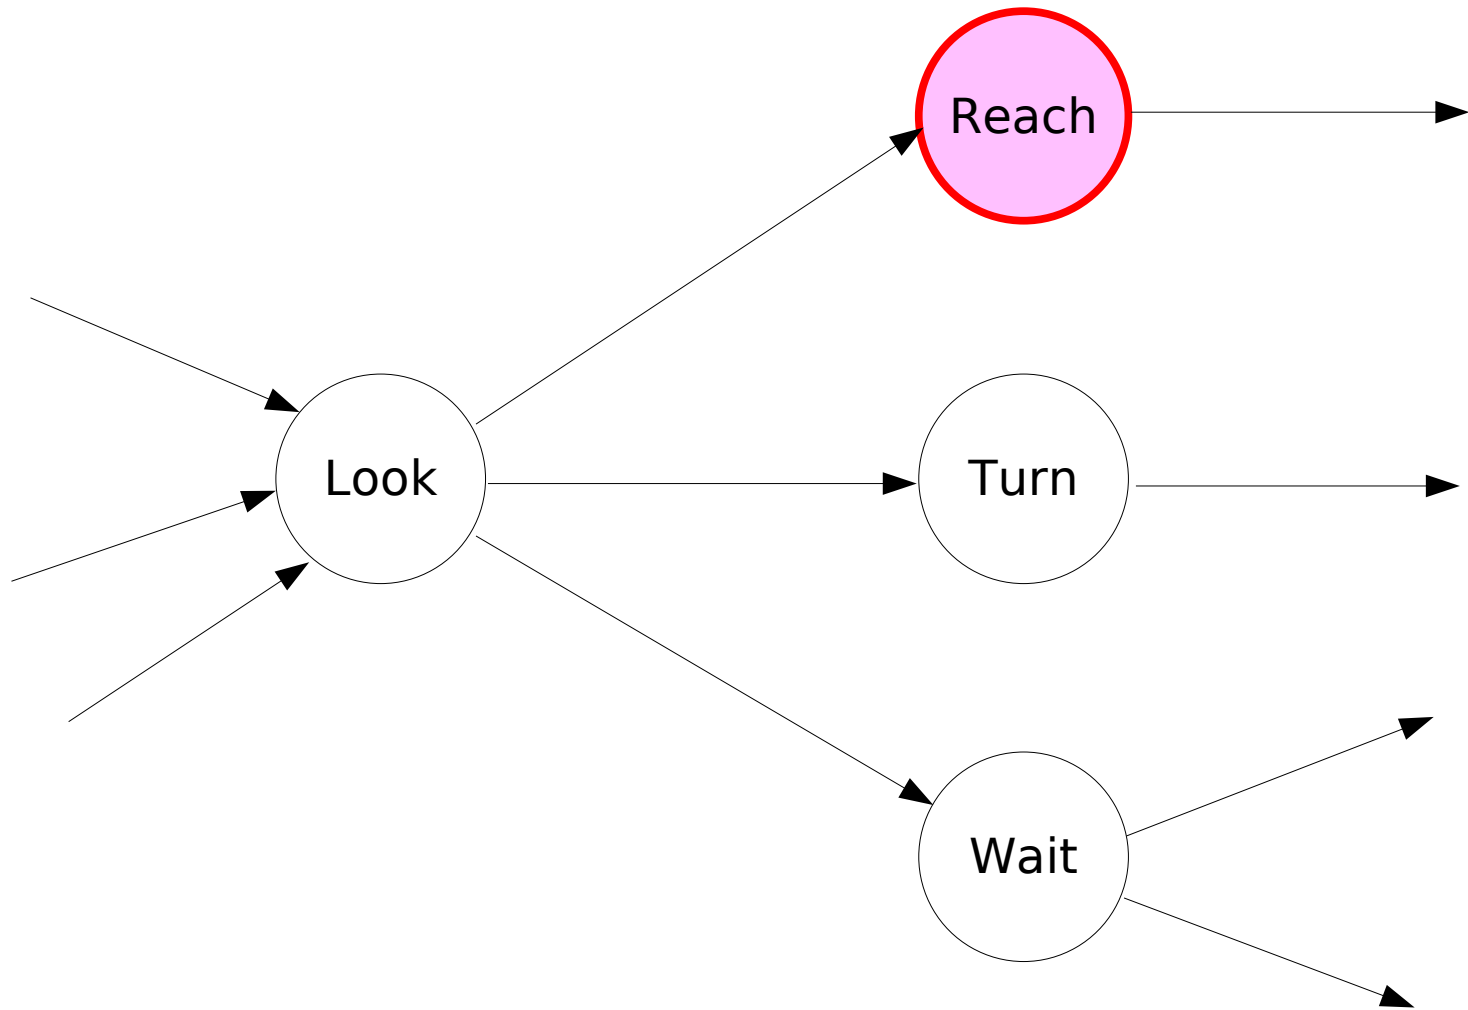



Reach activates its outgoing transition, which starts listening for events as Reach performs whatever action it's supposed to.

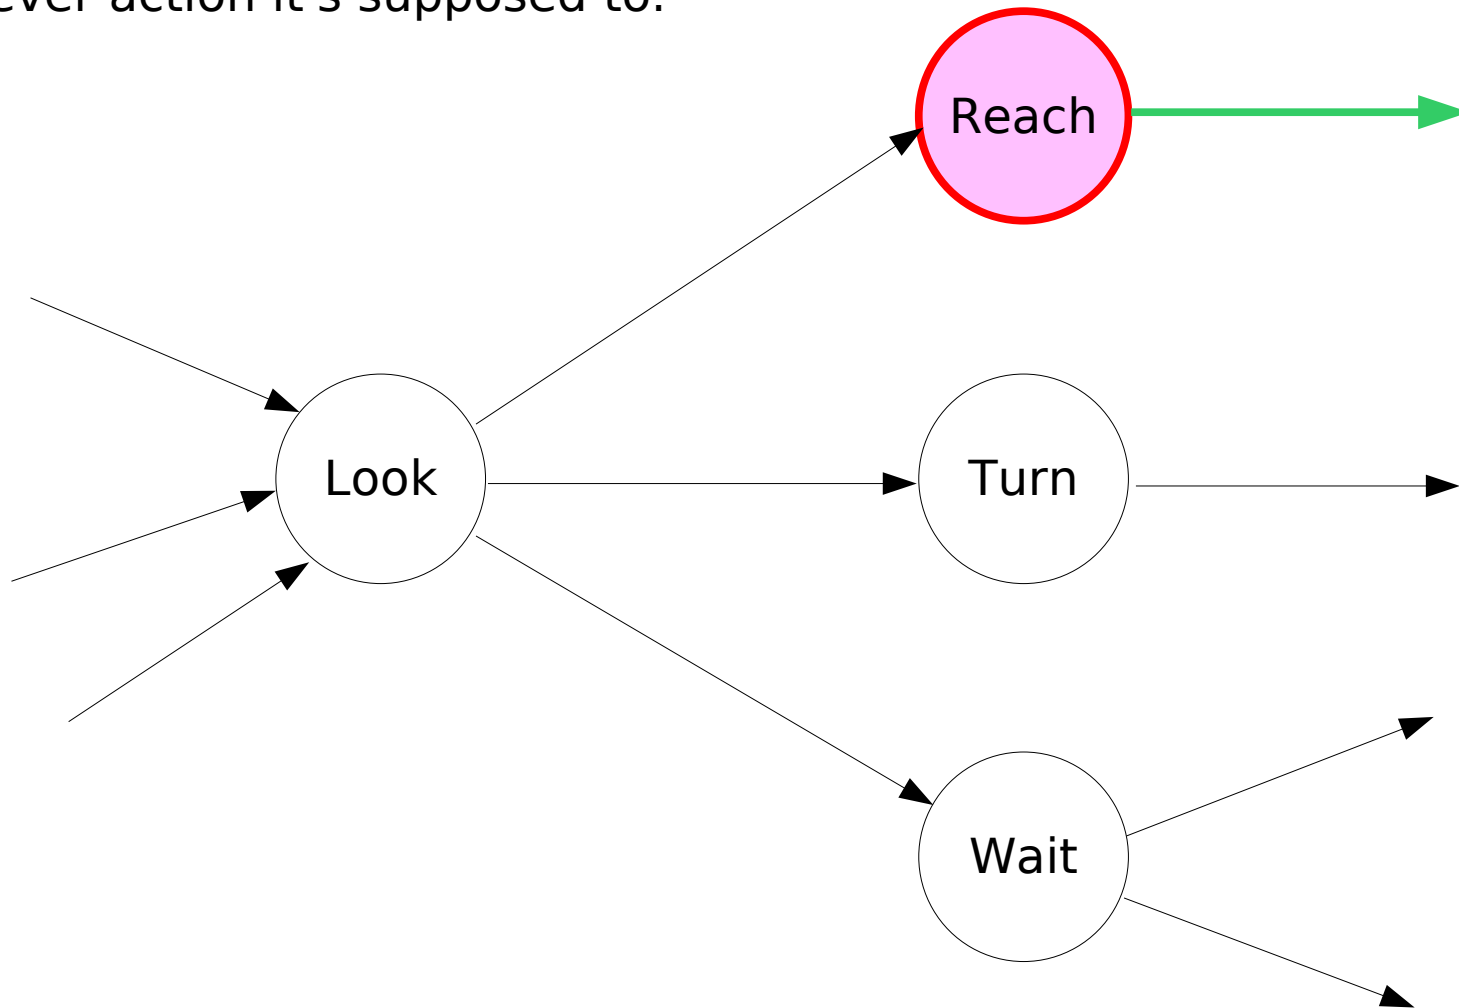


# Making State Machines


- cozmo-tools programmers don't write Python code to build state machines one node or link at a time.
- Why not?
  - It's tedious.
  - It's error-prone.
- Instead they use a shorthand notation.
- The shorthand is turned into Python code by a state machine preprocessor, genfsm.



# Example: Drive, then Talk

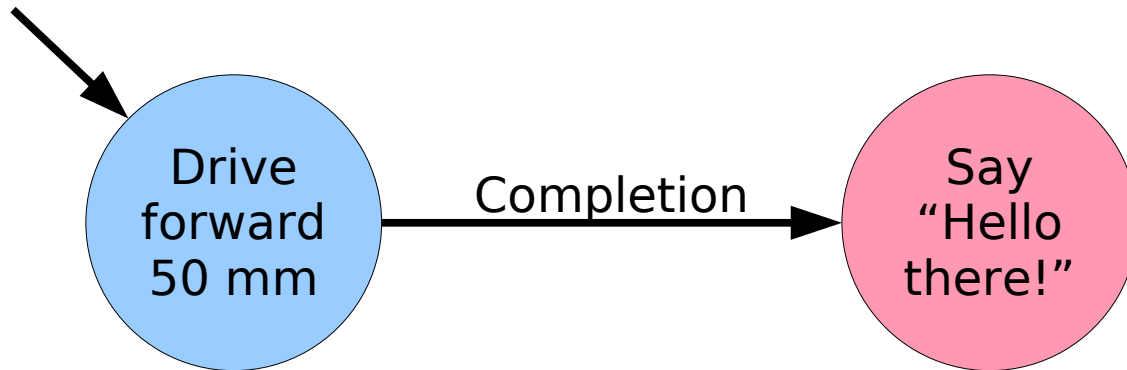

# Example: Drive, then Talk

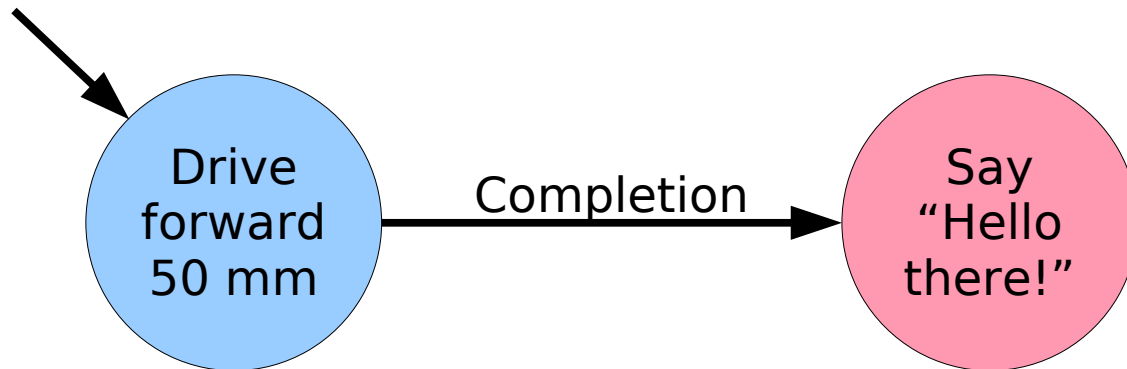

Shorthand notation:

`Forward(50) =C=> Say("Hello there!")`

The first defined node becomes the start.

# Generated Code

```
def setup(self):  
  
    forward1 = Forward(50)  
    forward1.set_name("forward1")  
    forward1.set_parent(self)  
  
    say1 = Say('Hello there!')  
    say1.set_name("say1")  
    say1.set_parent(self)  
  
    completiontrans1 = CompletionTrans()  
    completiontrans1.set_name("completiontrans1")  
    completiontrans1.add_sources(forward1)  
    completiontrans1.add_destinations(say1)
```

# The Full Source: Example1.fsm

```
from cozmo_fsm import *

class Example1(StateMachineProgram):
    $setup {
        Forward(50) =C=> Say('Hello there')
    }
```

# genfsm Translates .fsm to .py

```
$ genfsm Example1.fsm
```


Wrote generated code to Example1.py

```
$ simple_cli
```

```
... startup stuff ...
```


```
C> runfsm( 'Example1' )
```

# Metronome

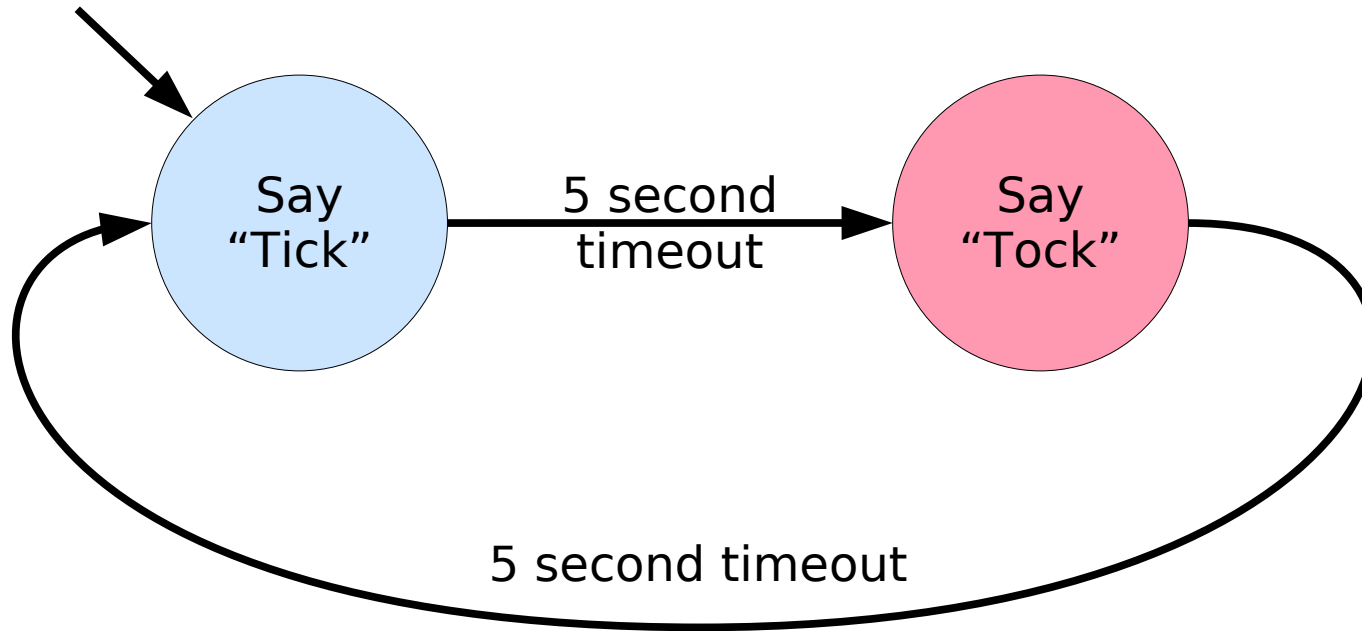



# Metronome

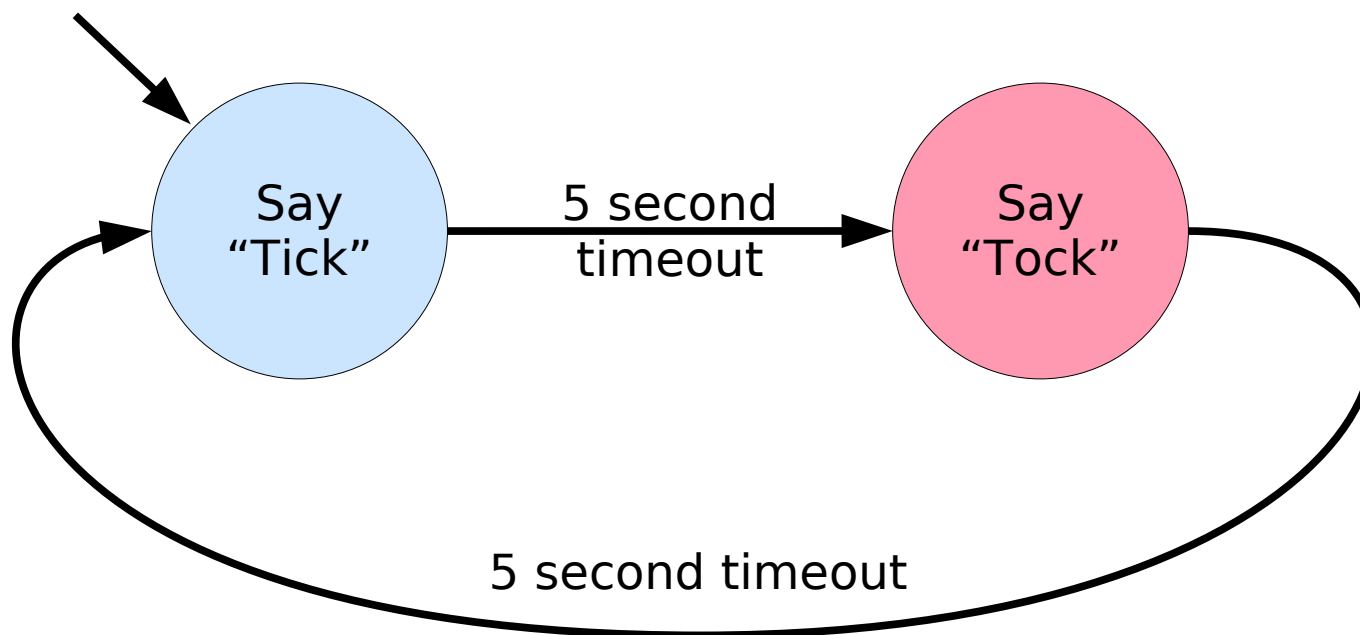

Shorthand:

tick: Say('Tick') =T(5)=> tock

tock: Say('Tock') =T(5)=> tick

# Running Nodes from the REPL


- In `simple_cli`, if you type `Forward(50)` you are calling a node constructor, not a function.
- You get back a state node object.
- It doesn't run. It's just a state node.
- Use `Forward(50).now()` to run it.
  - The `.now()` method sets up some structures the state node needs and then schedules it for immediate execution in the event loop.

# Fancy State Machines

cozmo\_fsm is a *hierarchical, parallel, message passing* state machine formalism:

- **Hierarchical:** state machines can nest.
- **Parallel:** multiple states can be active at the same time.
- **Message passing:** transitions can transmit information to their target nodes.

# “Back It Up”: Fork/Join

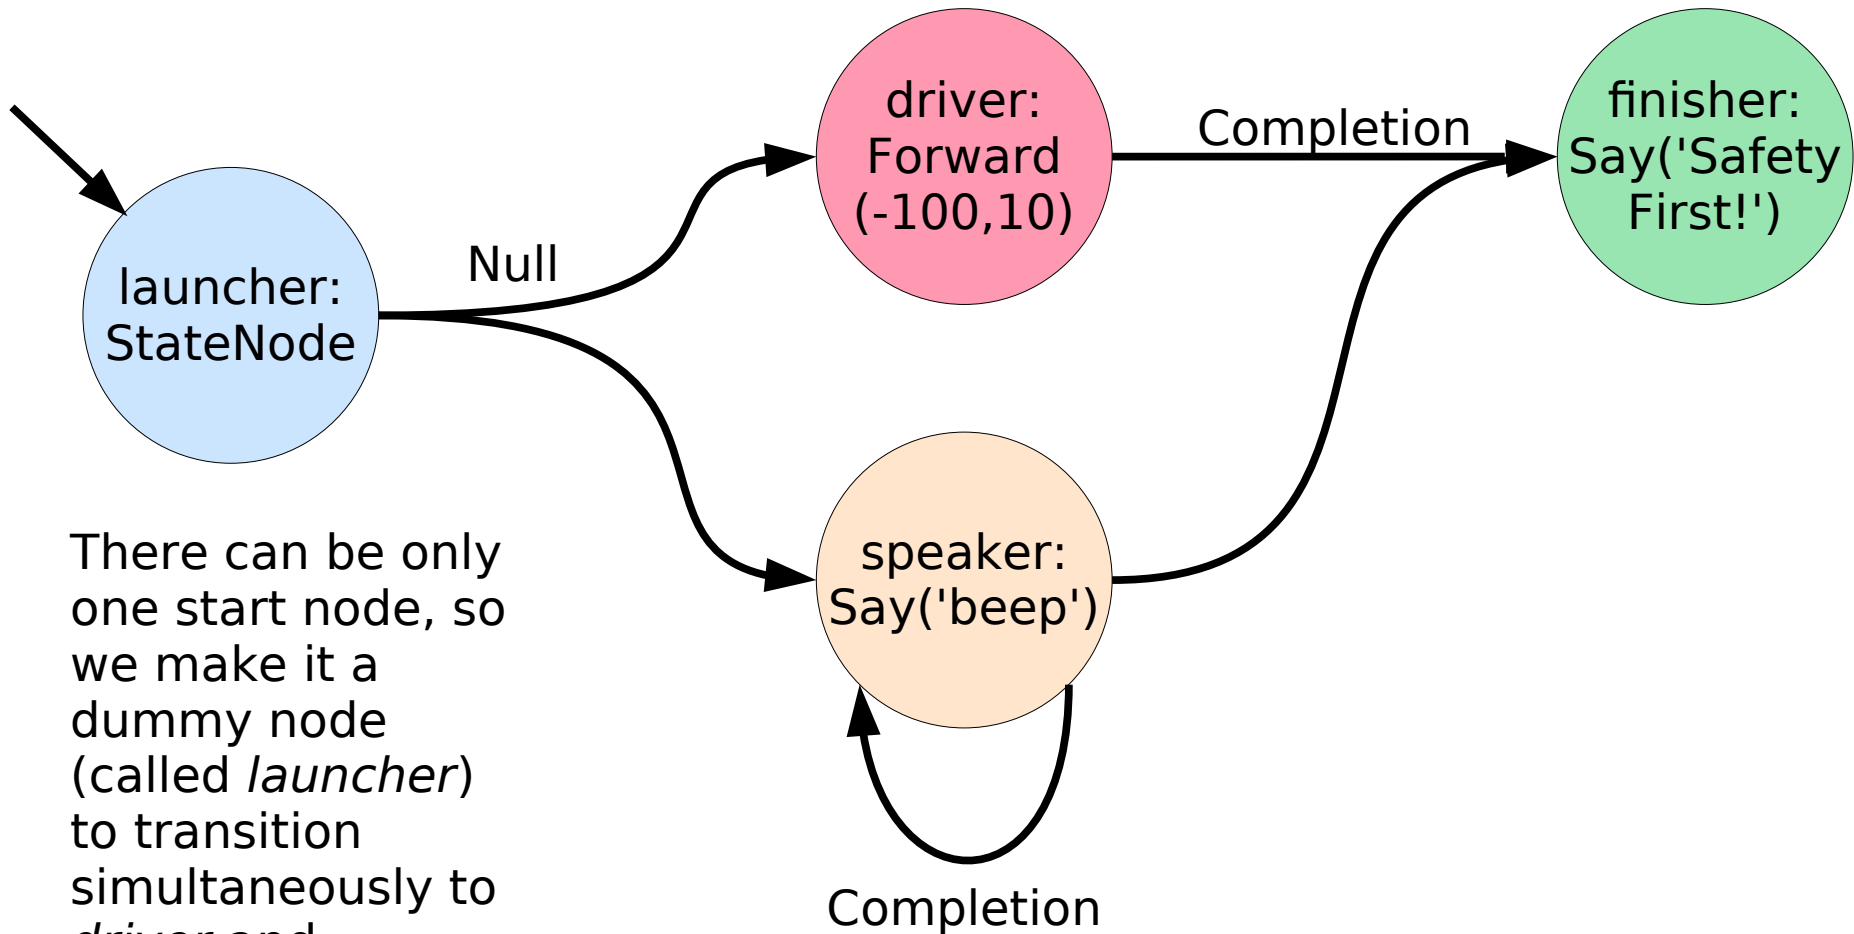

There can be only one start node, so we make it a dummy node (called *launcher*) to transition simultaneously to *driver* and *speaker*.

# BackItUp.fsm

```
launcher: StateNode() =N=> {driver, speaker}
```



```
driver: Forward(-100, 10)
```

```
speaker: Say('Beep!') =C=> speaker
```



```
{driver, speaker} =C=>
```

```
finisher: Say('Safety First!')
```

# Defining New Node Types

```
class Left90(Turn):  
    def __init__(self, **kwargs):  
        super().__init__(angle=90, **kwargs)
```

# Success and Failure

```
class Cube1Check(StateNode):  
    def start(self, event=None):  
        super().start(event)  
  
        if cube1.is_visible:  
            self.post_success()  
        else:  
            self.post_failure()
```

# Using Cube1Check

```
class Example2(StateMachineProgram):  
    $setup {  
        check: Cube1Check()  
        check =S=> Say('Visible')  
        check =F=> Say('Nada')  
    }
```




# Constructor Arguments

```
class CubeCheck(StateNode):
    def __init__(self, cube):
        self.cube = cube
        super().__init__()

    def start(self, event=None):
        super().start(event)
        if self.cube.is_visible:
            self.post_success()
        else:
            self.post_failure()
```

# Using CubeCheck



Parent class  
for all your  
programs.

```
class Example3(StateMachineProgram) :  
  $setup {  
    check: CubeCheck(cube3)  
    check =S=> Say('Visible')  
    check =F=> Say('Nada')  
  }
```

# Randomness

- Say can be given a list of utterances to choose from:

```
Say(['hi', 'hello', 'howdy'])
```

- The RND transition fires immediately and chooses one destination at random.

```
launch =RND=> {eeny, meeny, miney}
```

# Text Messages

```
C> tm right
```

```
dispatch: StateNode()
```

```
dispatch =TM('forward')=> Forward(50)
```

```
dispatch =TM('right')=> Turn(-90)
```

# Good Coding Style

- Node class names must begin with a capital letter.
- Node labels must be lowercase.
- It's okay to chain nodes and transitions together if each node has only one outgoing transition:

```
Forward(50) =C=>  
    Say("Hi there") =C=>  
        Turn(45)
```

# Good Coding Style

- If a node has multiple outgoing transitions, declare the node first, then each transition.

```
foo: DoSomething()  
foo =S=> Celebrate()  
foo =F=> Mourn()
```

# Good Coding Style

- If overriding a parent class's `__init__()` or `start()` method, be sure to:
  - call the superclass's method at the right time (this can be tricky)
  - pass arguments if appropriate.
- If overriding `start()` for a node that might be entered via multiple paths, be sure to check `self.running` and return if it's already true, before calling the parent's `start`.

# Defining the Start Node

The first node instance *defined* in the file is taken as the start node.

Example (**terrible coding style**):

```
apple =C=> pear =C=> apple
```

```
pear: SpeechNode("pear")
```

```
apple: SpeechNode("apple")
```

don't write code like this


The start node will be pear, not apple, since pear is the first node instance defined.



# Nested State Machines


DingDong has an empty `start()` method, but it has a `setup()` method.

```
class Doorbell(StateNode):  
    $setup {  
        ding: Say('ding') =C=>  
        dong: Say('dong') =C=>  
        ParentCompletes()  
    }
```

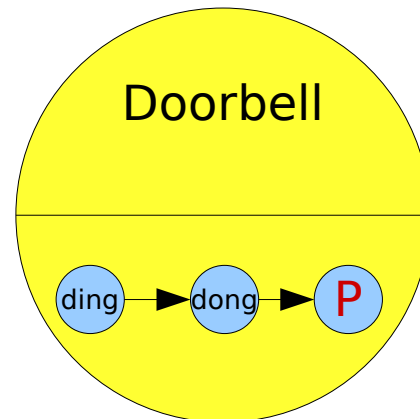

# Nested State Machines

```
class Nested(StateMachineProgram):  
    $setup {  
        db1: Doorbell() =C=>  
        bridge: Say('once again') =C=>  
        db2: Doorbell()  
    }
```

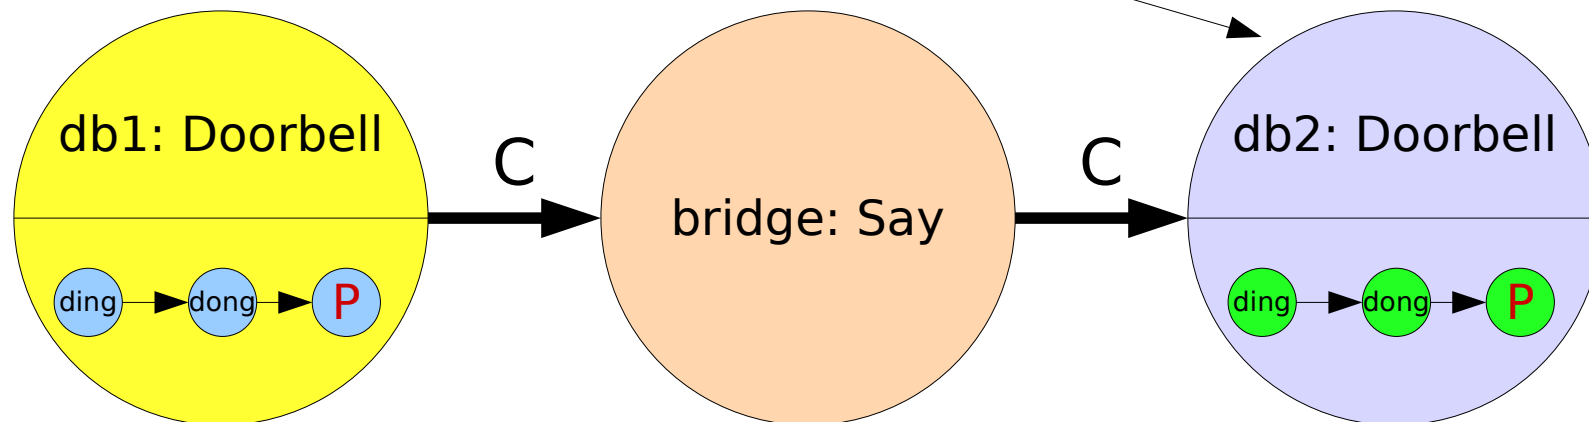

# Tracing

Use `tracefsm(level)` to trace execution.

0. No tracing
1. State node start
2. State node start and stop
3. Transition firing
4. Transition start and stop
- 5 - 9 are more obscure.

# To Learn More About State Machines

- Read the Cozmopedia articles.
- Look in `cozmo-tools/cozmo_fsm/examples` for sample code.
- Read the `cozmo_fsm` source code.
  - See `nodes.py` for node types.
  - See `transitions.py` for transition types.

# A Note About Odometry

- How does Cozmo keep track of his position?
- Simplest method: odometry.
- Wheel encoders monitor wheel turning and accelerometers measure turns.
- Requires knowing wheel radius and encoder resolution (degrees per tick).
- Limited accuracy due to wheel slippage.
- Error is cumulative, so odometry alone is only good for the short term.
- In Lab 2 you'll test Cozmo's odometry.