

# 15-213

"The course that gives CMU its Zip!"

## Integers Sep 3, 2002

### Topics

- Numeric Encodings
  - Unsigned & Two's complement
- Programming Implications
  - C promotion rules
- Basic operations
  - Addition, negation, multiplication
- Programming Implications
  - Consequences of overflow
  - Using shifts to perform power-of-2 multiply/divide

class03.ppt

15-213 F02

## C Puzzles

- Taken from old exams
- Assume machine with 32 bit word size, two's complement integers
- For each of the following C expressions, either:
  - Argue that is true for all argument values
  - Give example where not true

Initialization

```
int x = foo();
int y = bar();
unsigned ux = x;
unsigned uy = y;
```

- $x < 0 \Rightarrow ((x*2) < 0)$
- $ux \geq 0$
- $x \& 7 == 7 \Rightarrow (x \ll 30) < 0$
- $ux > -1$
- $x > y \Rightarrow -x < -y$
- $x * x \geq 0$
- $x > 0 \&\& y > 0 \Rightarrow x + y > 0$
- $x \geq 0 \Rightarrow -x \leq 0$
- $x \leq 0 \Rightarrow -x \geq 0$

15-213, F02

- 2 -

## Encoding Integers

### Unsigned

$$B2U(X) = \sum_{i=0}^{w-1} x_i \cdot 2^i$$

```
short int x = 15213;
short int y = -15213;
```

- C short 2 bytes long

	Decimal	Hex	Binary
x	15213	3B 6D	00111011 01101101
y	-15213	C4 93	11000100 10010011

### Two's Complement

$$B2T(X) = -x_{w-1} \cdot 2^{w-1} + \sum_{i=0}^{w-2} x_i \cdot 2^i$$

Sign Bit

### Sign Bit

- For 2's complement, most significant bit indicates sign
  - 0 for nonnegative
  - 1 for negative

- 3 -

15-213, F02

## Encoding Example (Cont.)

```
x = 15213: 00111011 01101101
y = -15213: 11000100 10010011
```

Weight	15213	-15213		
1	1	1	1	1
2	0	0	1	2
4	1	4	0	0
8	1	8	0	0
16	0	0	1	16
32	1	32	0	0
64	1	64	0	0
128	0	0	1	128
256	1	256	0	0
512	1	512	0	0
1024	0	0	1	1024
2048	1	2048	0	0
4096	1	4096	0	0
8192	1	8192	0	0
16384	0	0	1	16384
-32768	0	0	1	-32768
<b>Sum</b>	<b>15213</b>	<b>-15213</b>		

- 4 -

15-213, F02

# Numeric Ranges

## Unsigned Values

- $UMin = 0$   
000...0
- $UMax = 2^w - 1$   
111...1

## Two's Complement Values

- $TMin = -2^{w-1}$   
100...0
- $TMax = 2^{w-1} - 1$   
011...1

## Other Values

- Minus 1  
111...1

### Values for $W = 16$

	Decimal	Hex	Binary
UMax	65535	FF FF	11111111 11111111
TMax	32767	7F FF	01111111 11111111
TMin	-32768	80 00	10000000 00000000
-1	-1	FF FF	11111111 11111111
0	0	00 00	00000000 00000000

- 5 -

15-213, F'02

# Values for Different Word Sizes

	W			
	8	16	32	64
UMax	255	65,535	4,294,967,295	18,446,744,073,709,551,615
TMax	127	32,767	2,147,483,647	9,223,372,036,854,775,807
TMin	-128	-32,768	-2,147,483,648	-9,223,372,036,854,775,808

## Observations

- $|TMin| = TMax + 1$ 
  - Asymmetric range
- $UMax = 2 * TMax + 1$

## C Programming

- `#include <limits.h>`
  - K&R App. B11
- Declares constants, e.g.,
  - `ULONG_MAX`
  - `LONG_MAX`
  - `LONG_MIN`
- Values platform-specific

- 6 -

15-213, F'02

# Unsigned & Signed Numeric Values

X	B2U(X)	B2T(X)
0000	0	0
0001	1	1
0010	2	2
0011	3	3
0100	4	4
0101	5	5
0110	6	6
0111	7	7
1000	8	-8
1001	9	-7
1010	10	-6
1011	11	-5
1100	12	-4
1101	13	-3
1110	14	-2
1111	15	-1

## Equivalence

- Same encodings for nonnegative values

## Uniqueness

- Every bit pattern represents unique integer value
- Each representable integer has unique bit encoding

## ⇒ Can Invert Mappings

- $U2B(x) = B2U^{-1}(x)$ 
  - Bit pattern for unsigned integer
- $T2B(x) = B2T^{-1}(x)$ 
  - Bit pattern for two's comp integer

- 7 -

15-213, F'02

# Casting Signed to Unsigned

## C Allows Conversions from Signed to Unsigned

```

short int      x = 15213;
unsigned short int ux = (unsigned short) x;
short int      y = -15213;
unsigned short int uy = (unsigned short) y;
    
```


## Resulting Value

- No change in bit representation
- Nonnegative values unchanged
  - $ux = 15213$
- Negative values change into (large) positive values
  - $uy = 50323$

- 8 -

15-213, F'02

## Relation between Signed & Unsigned

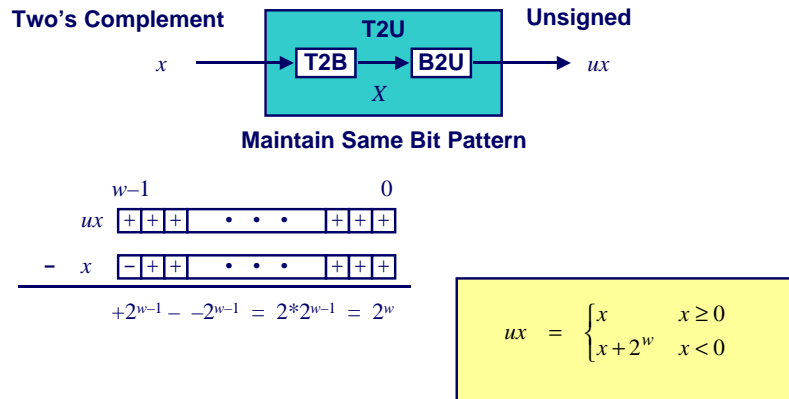

- 9 -

15-213, F02

## Relation Between Signed & Unsigned

Weight	-15213	50323
1	1	1
2	1	1
4	0	0
8	0	0
16	1	16
32	0	0
64	0	0
128	1	128
256	0	0
512	0	0
1024	1	1024
2048	0	0
4096	0	0
8192	0	0
16384	1	16384
32768	1	32768
<b>Sum</b>	<b>-15213</b>	<b>50323</b>

■  $uy = y + 2 * 32768 = y + 65536$

- 10 -

15-213, F02

## Signed vs. Unsigned in C

### Constants

- By default are considered to be signed integers
- Unsigned if have "U" as suffix  
`0U, 4294967259U`

### Casting

- Explicit casting between signed & unsigned same as U2T and T2U
 

```
int tx, ty;
unsigned ux, uy;
tx = (int) ux;
uy = (unsigned) ty;
```
- Implicit casting also occurs via assignments and procedure calls
 

```
tx = ux;
uy = ty;
```

- 11 -

15-213, F02

## Casting Surprises

### Expression Evaluation

- If mix unsigned and signed in single expression, signed values implicitly cast to unsigned
- Including comparison operations `<`, `>`, `==`, `<=`, `>=`
- Examples for  $W = 32$

Constant <sub>1</sub>	Constant <sub>2</sub>	Relation	Evaluation
0	0U	==	unsigned
-1	0	<	signed
-1	0U	>	unsigned
2147483647	-2147483648	>	signed
2147483647U	-2147483648	<	unsigned
-1	-2	>	signed
(unsigned) -1	-2	>	unsigned
2147483647	2147483648U	<	unsigned
2147483647	(int) 2147483648U	>	signed


- 12 -

F02

# Explanation of Casting Surprises

## 2's Comp. → Unsigned

- Ordering Inversion
- Negative → Big Positive

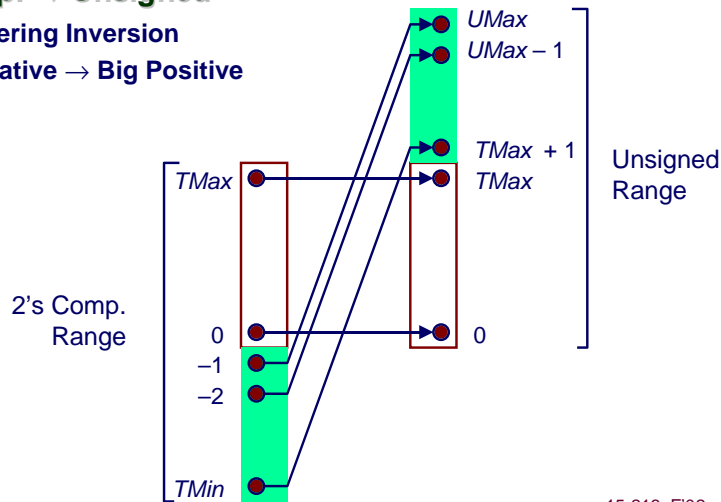

- 13 -

15-213, F'02


# Sign Extension

## Task:

- Given  $w$ -bit signed integer  $x$
- Convert it to  $w+k$ -bit integer with same value

## Rule:

- Make  $k$  copies of sign bit:
- $X' = \underbrace{X_{w-1}, \dots, X_{w-1}}_{k \text{ copies of MSB}}, X_{w-1}, X_{w-2}, \dots, X_0$

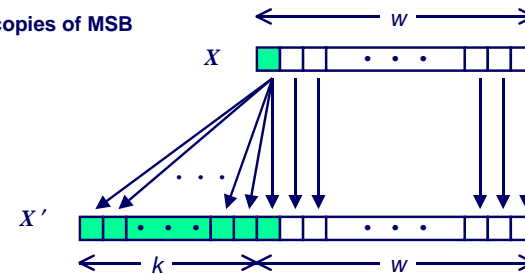

- 14 -

15-213, F'02

# Sign Extension Example

```
short int x = 15213;
int      ix = (int) x;
short int y = -15213;
int      iy = (int) y;
```

	Decimal	Hex	Binary
x	15213	3B 6D	00111011 01101101
ix	15213	00 00 3B 6D	00000000 00000000 00111011 01101101
y	-15213	C4 93	11000100 10010011
iy	-15213	FF FF C4 93	11111111 11111111 11000100 10010011

- Converting from smaller to larger integer data type
- C automatically performs sign extension


- 15 -

15-213, F'02

# Justification For Sign Extension

## Prove Correctness by Induction on $k$

- Induction Step: extending by single bit maintains value

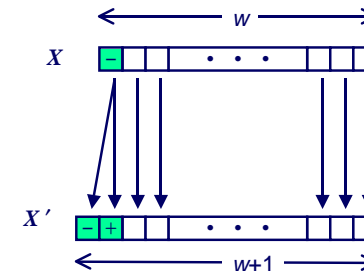

- Key observation:  $-2^{w-1} = -2^w + 2^{w-1}$
- Look at weight of upper bits:
 
$$x \quad -2^{w-1} x_{w-1}$$

$$x' \quad -2^w x_{w-1} + 2^{w-1} x_{w-1} = -2^{w-1} x_{w-1}$$

- 16 -

15-213, F'02

# Why Should I Use Unsigned?

## Don't Use Just Because Number Nonzero

- C compilers on some machines generate less efficient code
 

```
unsigned i;
for (i = 1; i < cnt; i++)
    a[i] += a[i-1];
```
- Easy to make mistakes
 

```
for (i = cnt-2; i >= 0; i--)
    a[i] += a[i+1];
```

## Do Use When Performing Modular Arithmetic

- Multiprecision arithmetic
- Other esoteric stuff

## Do Use When Need Extra Bit's Worth of Range

- Working right up to limit of word size

# Negating with Complement & Increment

## Claim: Following Holds for 2's Complement

$$\sim x + 1 == -x$$

## Complement

- Observation:  $\sim x + x == 1111\dots11_2 == -1$

$$\begin{array}{r} x \quad 10011101 \\ + \sim x \quad 01100010 \\ \hline -1 \quad 11111111 \end{array}$$

## Increment

- $\sim x + \cancel{x} + (\cancel{-x} + 1) == \cancel{-1} + (-x + \cancel{1})$
- $\sim x + 1 == -x$

## Warning: Be cautious treating int's as integers

# Comp. & Incr. Examples

x = 15213


	Decimal	Hex	Binary
x	15213	3B 6D	00111011 01101101
~x	-15214	C4 92	11000100 10010010
~x+1	-15213	C4 93	11000100 10010011
y	-15213	C4 93	11000100 10010011

0

	Decimal	Hex	Binary
0	0	00 00	00000000 00000000
~0	-1	FF FF	11111111 11111111
~0+1	0	00 00	00000000 00000000

# Unsigned Addition

Operands: w bits



True Sum: w+1 bits



Discard Carry: w bits



## Standard Addition Function

- Ignores carry output

## Implements Modular Arithmetic


$$s = \text{UAdd}_w(u, v) = u + v \bmod 2^w$$

$$\text{UAdd}_w(u, v) = \begin{cases} u + v & u + v < 2^w \\ u + v - 2^w & u + v \geq 2^w \end{cases}$$

# Visualizing Integer Addition

## Integer Addition



- 4-bit integers  $u, v$
- Compute true sum  $\text{Add}_4(u, v)$
- Values increase linearly with  $u$  and  $v$
- Forms planar surface

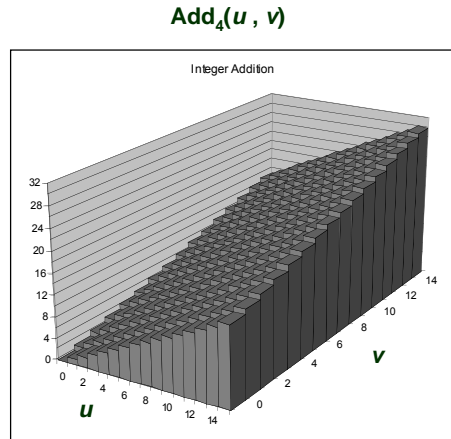

# Visualizing Unsigned Addition

## Wraps Around

- If true sum  $\geq 2^w$
- At most once

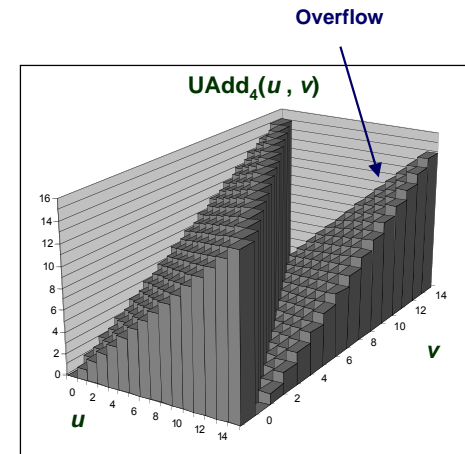


# Mathematical Properties

## Modular Addition Forms an Abelian Group

- Closed under addition  
 $0 \leq \text{UAdd}_w(u, v) \leq 2^w - 1$
- Commutative  
 $\text{UAdd}_w(u, v) = \text{UAdd}_w(v, u)$
- Associative  
 $\text{UAdd}_w(t, \text{UAdd}_w(u, v)) = \text{UAdd}_w(\text{UAdd}_w(t, u), v)$
- 0 is additive identity  
 $\text{UAdd}_w(u, 0) = u$
- Every element has additive inverse
  - Let  $\text{UComp}_w(u) = 2^w - u$
  - $\text{UAdd}_w(u, \text{UComp}_w(u)) = 0$

# Two's Complement Addition

Operands:  $w$  bits



True Sum:  $w+1$  bits



Discard Carry:  $w$  bits



## TAdd and UAdd have Identical Bit-Level Behavior



- Signed vs. unsigned addition in C:
 

```
int s, t, u, v;
s = (int) ((unsigned) u + (unsigned) v);
t = u + v
```
- Will give  $s == t$

# Characterizing TAdd

## Functionality

- True sum requires  $w+1$  bits
- Drop off MSB
- Treat remaining bits as 2's comp. integer

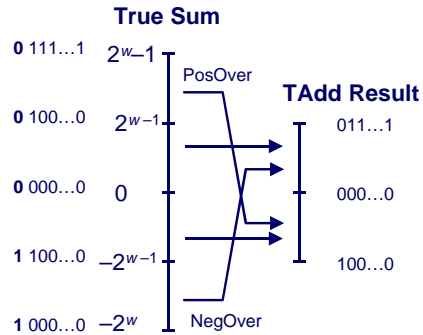

$$TAdd_w(u,v) = \begin{cases} u+v+2^{w-1} & u+v < TMin_w \text{ (NegOver)} \\ u+v & TMin_w \leq u+v \leq TMax_w \\ u+v-2^{w-1} & TMax_w < u+v \text{ (PosOver)} \end{cases}$$


# Visualizing 2's Comp. Addition

## Values

- 4-bit two's comp.
- Range from -8 to +7

## Wraps Around

- If sum  $\geq 2^{w-1}$ 
  - Becomes negative
  - At most once
- If sum  $< -2^{w-1}$ 
  - Becomes positive
  - At most once

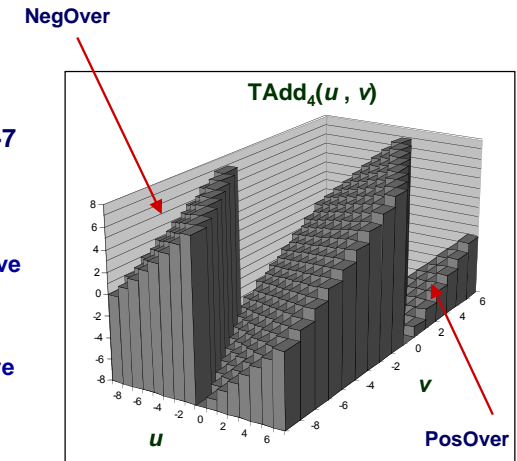

# Detecting 2's Comp. Overflow


## Task

- Given  $s = TAdd_w(u, v)$
- Determine if  $s = Add_w(u, v)$
- Example
 

```
int s, u, v;
s = u + v;
```

## Claim

- Overflow iff either:
    - $u, v < 0, s \geq 0$  (NegOver)
    - $u, v \geq 0, s < 0$  (PosOver)
- $$ovf = (u < 0 == v < 0) \ \&\& \ (u < 0 != s < 0);$$



# Mathematical Properties of TAdd

## Isomorphic Algebra to UAdd

- $TAdd_w(u, v) = U2T(UAdd_w(T2U(u), T2U(v)))$ 
  - Since both have identical bit patterns

## Two's Complement Under TAdd Forms a Group

- Closed, Commutative, Associative, 0 is additive identity
- Every element has additive inverse
  - Let  $TComp_w(u) = U2T(UComp_w(T2U(u)))$
  - $TAdd_w(u, TComp_w(u)) = 0$

$$TComp_w(u) = \begin{cases} -u & u \neq TMin_w \\ TMin_w & u = TMin_w \end{cases}$$

# Multiplication

## Computing Exact Product of $w$ -bit numbers $x, y$

- Either signed or unsigned


## Ranges

- **Unsigned:**  $0 \leq x * y \leq (2^w - 1)^2 = 2^{2w} - 2^{w+1} + 1$ 
  - Up to  $2w$  bits
- **Two's complement min:**  $x * y \geq (-2^{w-1}) * (2^{w-1} - 1) = -2^{2w-2} + 2^{w-1}$ 
  - Up to  $2w-1$  bits
- **Two's complement max:**  $x * y \leq (-2^{w-1})^2 = 2^{2w-2}$ 
  - Up to  $2w$  bits, but only for  $(TMin_w)^2$

## Maintaining Exact Results

- Would need to keep expanding word size with each product computed
- Done in software by "arbitrary precision" arithmetic packages

# Unsigned Multiplication in C

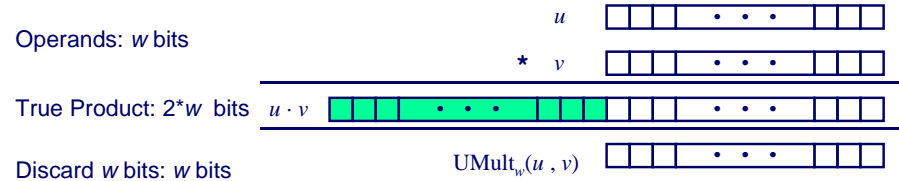

## Standard Multiplication Function

- Ignores high order  $w$  bits

## Implements Modular Arithmetic

$$UMult_w(u, v) = u \cdot v \text{ mod } 2^w$$

# Unsigned vs. Signed Multiplication

## Unsigned Multiplication

```
unsigned ux = (unsigned) x;
unsigned uy = (unsigned) y;
unsigned up = ux * uy
```

- Truncates product to  $w$ -bit number  $up = UMult_w(ux, uy)$
- Modular arithmetic:  $up = ux \cdot uy \text{ mod } 2^w$

## Two's Complement Multiplication

```
int x, y;
int p = x * y;
```

- Compute exact product of two  $w$ -bit numbers  $x, y$
- Truncate result to  $w$ -bit number  $p = TMult_w(x, y)$

# Unsigned vs. Signed Multiplication

## Unsigned Multiplication

```
unsigned ux = (unsigned) x;
unsigned uy = (unsigned) y;
unsigned up = ux * uy
```

## Two's Complement Multiplication

```
int x, y;
int p = x * y;
```

## Relation


- Signed multiplication gives same bit-level result as unsigned
- $up == (\text{unsigned}) p$



# Power-of-2 Multiply with Shift

## Operation

- $u \ll k$  gives  $u * 2^k$
- Both signed and unsigned

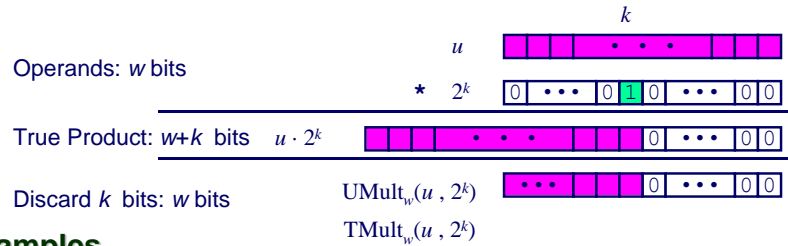


## Examples

- $u \ll 3 == u * 8$
- $u \ll 5 - u \ll 3 == u * 24$
- Most machines shift and add much faster than multiply
  - Compiler generates this code automatically

# Unsigned Power-of-2 Divide with Shift

## Quotient of Unsigned by Power of 2

- $u \gg k$  gives  $\lfloor u / 2^k \rfloor$
- Uses logical shift

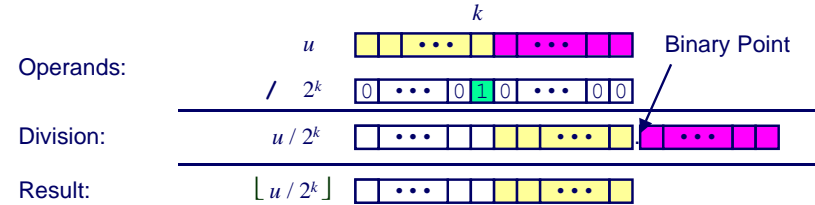


	Division	Computed	Hex	Binary
$x$	15213	15213	3B 6D	00111011 01101101
$x \gg 1$	7606.5	7606	1D B6	00011101 10110110
$x \gg 4$	950.8125	950	03 B6	00000011 10110110
$x \gg 8$	59.4257813	59	00 3B	00000000 00111011

# Signed Power-of-2 Divide with Shift

## Quotient of Signed by Power of 2

- $x \gg k$  gives  $\lfloor x / 2^k \rfloor$
- Uses arithmetic shift
- Rounds wrong direction when  $u < 0$

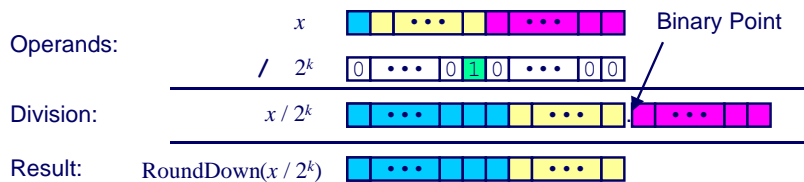


	Division	Computed	Hex	Binary
$y$	-15213	-15213	C4 93	11000100 10010011
$y \gg 1$	-7606.5	-7607	E2 49	11100010 01001001
$y \gg 4$	-950.8125	-951	FC 49	11111100 01001001
$y \gg 8$	-59.4257813	-60	FF C4	11111111 11000100

# Correct Power-of-2 Divide

## Quotient of Negative Number by Power of 2

- Want  $\lceil x / 2^k \rceil$  (Round Toward 0)
- Compute as  $\lfloor (x+2^k-1) / 2^k \rfloor$ 
  - In C:  $(x + (1 \ll k) - 1) \gg k$
  - Biases dividend toward 0


### Case 1: No rounding

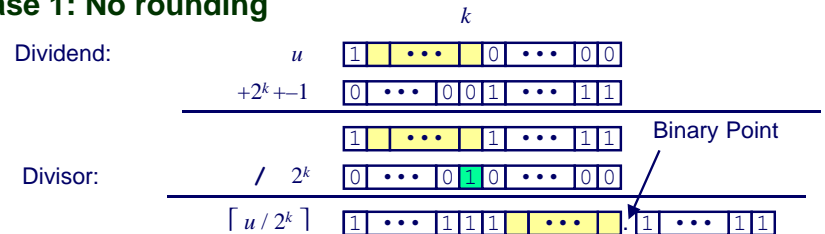

*Biasing has no effect*

# Correct Power-of-2 Divide (Cont.)

## Case 2: Rounding

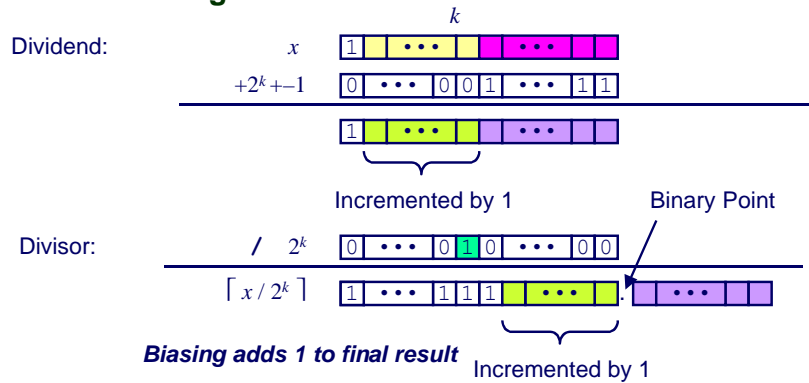

# Properties of Unsigned Arithmetic

## Unsigned Multiplication with Addition Forms Commutative Ring

- Addition is commutative group
- Closed under multiplication  
 $0 \leq \text{UMult}_w(u, v) \leq 2^w - 1$
- Multiplication Commutative  
 $\text{UMult}_w(u, v) = \text{UMult}_w(v, u)$
- Multiplication is Associative  
 $\text{UMult}_w(t, \text{UMult}_w(u, v)) = \text{UMult}_w(\text{UMult}_w(t, u), v)$
- 1 is multiplicative identity  
 $\text{UMult}_w(u, 1) = u$
- Multiplication distributes over addition  
 $\text{UMult}_w(t, \text{UAdd}_w(u, v)) = \text{UAdd}_w(\text{UMult}_w(t, u), \text{UMult}_w(t, v))$

# Properties of Two's Comp. Arithmetic

## Isomorphic Algebras

- Unsigned multiplication and addition
  - Truncating to  $w$  bits
- Two's complement multiplication and addition
  - Truncating to  $w$  bits

## Both Form Rings

- Isomorphic to ring of integers mod  $2^w$

## Comparison to Integer Arithmetic

- Both are rings
- Integers obey ordering properties, e.g.,
  - $u > 0 \Rightarrow u + v > v$
  - $u > 0, v > 0 \Rightarrow u \cdot v > 0$
- These properties are not obeyed by two's comp. arithmetic

$$TMax + 1 == TMin$$

$$15213 * 30426 == -10030 \text{ (16-bit words)}$$

# C Puzzle Answers

- Assume machine with 32 bit word size, two's comp. integers
- $TMin$  makes a good counterexample in many cases

$x < 0$	$\Rightarrow$	$((x*2) < 0)$	False: $TMin$
$ux \geq 0$			True: $0 = UMin$
$x \& 7 == 7$	$\Rightarrow$	$(x \ll 30) < 0$	True: $x_1 = 1$
$ux > -1$			False: $0$
$x > y$	$\Rightarrow$	$-x < -y$	False: $-1, TMin$
$x * x \geq 0$			False: $30426$
$x > 0 \ \&\& \ y > 0$	$\Rightarrow$	$x + y > 0$	False: $TMax, TMax$
$x \geq 0$	$\Rightarrow$	$-x \leq 0$	True: $-TMax < 0$
$x \leq 0$	$\Rightarrow$	$-x \geq 0$	False: $TMin$