


Shell Programming

15-123

Systems Skills in C and Unix

The Shell

- A command line interpreter that provides the interface to Unix OS.

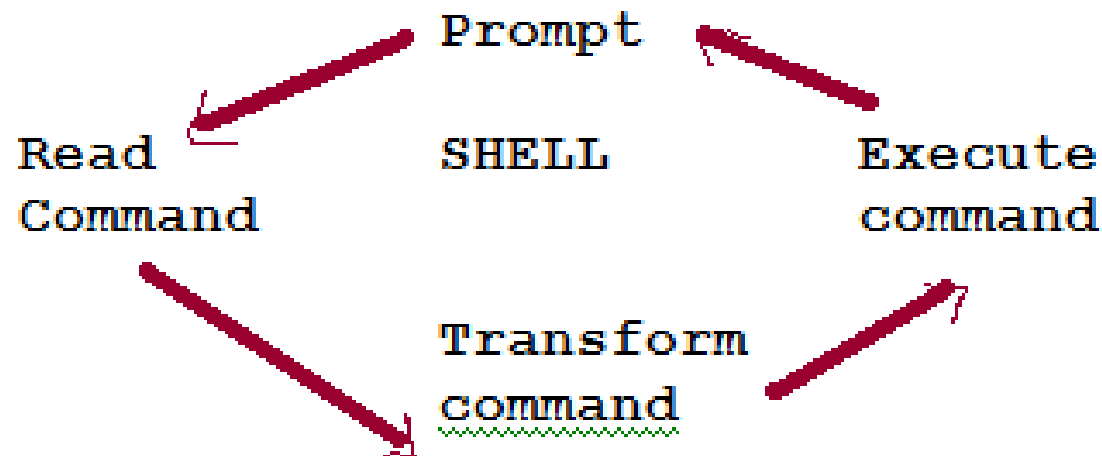

What Shell are we on?

- **echo \$SHELL**
- Most unix systems have
 - Bourne shell (**sh**)
 - No command history
 - Korn shell (**ksh**)
 - Shell functions
 - C shell (**csh**)
 - History, no shell functions
- More details at unix.com

> history > log.txt

What's Shell good for?

- Starting and stopping processes
- Controlling the terminal
- Interacting with unix system
- Solving complex problems with simple scripts
 - Life saver for system administrators
- *What is a “shell script” ?*
 - A collection of shell commands supported by control statements
 - Shell scripts are interpreted and instructions executed

```
> sh file.sh
```

Quick review of basics

A Shell Script

```
#!/bin/sh
```

-- above line should always be the first line in your script

```
# A simple script
```

```
who am I
```

```
Date
```

batch
file

- *Execute with: sh first.sh*

Another shell script

```
#!/bin/sh  
# run the script as: sh handin.sh SL/SL1 all.txt
```

```
dir=$1  
basedir="/afs/andrew/course/15/123/handin"
```

```
mkdir -p $basedir/"$dir"
```

```
cat $2 ① → pipe
```

```
while read id
```

```
do
```

```
  mkdir -p $basedir/$dir/$id
```

```
  #cp notdone.txt $basedir/$dir/$id
```

```
  fs sa $basedir/$dir/$id $id all
```

```
  fs sa $basedir/$dir/$id system:anyuser 1
```

```
  fs sa $basedir/$dir/$id areece all
```

```
  fs sa $basedir/$dir/$id mengh all
```

```
  fs sa $basedir/$dir/$id jmburges all
```

```
  fs sa $basedir/$dir/$id ylung all
```

```
done
```



Command Line Arguments

- \$# - represents the total number of arguments (much like argv) – except command
- • \$0 - represents the name of the script, as invoked
- • ~~\$1, \$2, \$3, ..., \$8, \$9~~ - The first 9 command line arguments
 - Use “shift” command to handle more than 9 args
- • \$* - all command line arguments OR
- • @\$ - all command line arguments

What are the three kinds of quotes in Shell expressions?

'Hello world \n'

"Hello world \n"
└──────────┬ interpreted

X='cp \$file1 \$file2'

Capturing output from a shell operation

```
# /usr/bin/sh
```

```
out1=`gcc -ansi -pedantic -Wall main1.c part1.c`
```

```
len=`echo $out1|wc -c`
```

```
if [ $len -gt 1 ]
```

```
then
```

```
    echo $out1
```

```
    exit
```

```
fi
```

```
out2=`./a.out`
```

```
len=`echo $out2|wc -c`
```

```
if [ $len -gt 1 ]
```

```
then
```

```
    echo $out2
```

```
    exit
```

```
fi
```

```
echo "congratulations! you passed part 1"
```

A major bug: Did not catch if the program seg faulted

if [-x != y]
 ↓ ↑
 one op one sp

Operators for strings, ints and files

Operators for strings, ints, and files						
string	x = y, comparison: equal	x != y, comparison: not equal	x, not null/not 0 length	-n x, is null		
ints	x -eq y, equal	x -ge y, greater or equal	x -le y, lesser or equal	x -gt y, strictly greater	x -lt y, strictly lesser	x -ne y, not equal
File	-f x, is a regular file	-d x, is a directory	-r x, is readable by this script	-w x, is writeable by this script	-x x, is executable by this script	
logical	x -a y, logical and, like && in C (0 is true, though)			x -o y, logical or, like && in C (0 is true, though)		

if [-f file]

Control Statements – Loops and conditionals

```
for var in "$@"  
do  
    printf "%s\n" $var  
done
```

```
for (( i = 1 ; i < 20 ; i++ ))  
do
```

```
done
```

```
while read file line
```

```
do
```

```
    echo $file line
```

```
done
```

```
if command  
then  
    command  
    command  
    ...  
    command  
else  
    command  
    command  
    ...  
    command  
fi
```

```
if command  
then  
    command  
    command  
    ...  
    command  
fi
```


if []
then

elif []
then
!

file
→

Useful shell commands

- Shell already has a collection of rich commands
- Some Useful commands
 - uptime, cut, date, cat, finger, hexdump, man, md5sum, quota,
 - mkdir, rmdir, rm, mv, du, df, find, cp, chmod, cd
 - uname, zip, unzip, gzip, tar
 - tr, sed, sort, uniq, ascii
 - Type “**man command**” to read about shell commands

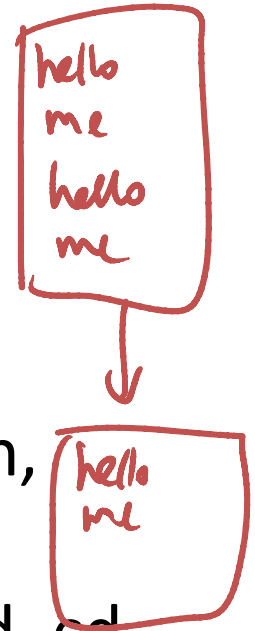


cat file | sort | uniq > file1
mv file1 file

What do these shell commands do?

- `cat dups.txt | sort | uniq`
- `cat somefile.txt | sed 's/|/,/g' > outfile`
- `cat somefile.txt | sed 's/#|#,#g' > outfile`
- `cat somefile.txt | sed '1,10 s/|/,/g' > outfile`
- `cat somefile.txt | sed '1,$ s/|/,/g' > outfile`
- `cat somefile.txt | sed '/begin^[0-9]+/ s/|/,/g' > outfile`
- `cat file | cut -d: -f3,5`
- `cat file.txt | tr "abcd" "ABCD" > outfile.txt`

More of those

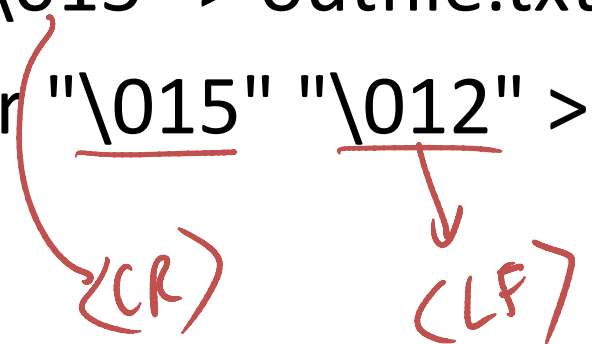- `cat file.txt | tr "a-z" "A-Z" > outfile.txt`
- `cat file.txt | tr -d "\015" > outfile.txt`
- `cat somefile.txt | tr "\015" "\012" > somefile.txt`


I/O

- File descriptors
 - Stdin(0), stdout(1), stderr(2)
- Input/output from/to stdin/stdout
 - read data
 - echo \$data
- redirecting
 - rm filename 1>&2

Unix tools in shell scripts

- Shell scripts can include utilities such as
 - grep
 - Pattern matching
 - sed
 - Stream editor
 - awk
 - Pattern scanning and processing
 - Read more in notes and man pages

Interprocess communication



Inter Process Communication (IPC)

- Communication between processes

- Using **Pipes**

- Pipes is the mechanism for IPC


- ls | sort | echo

- 4 processes in play

- Each call spans a new process

- Using fork

- More later about fork

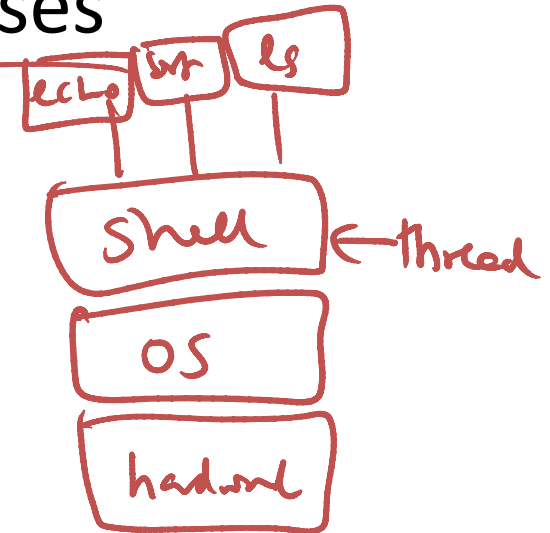

Editing in Place


- `cat somefile.txt | tr -d "\015" "\012" | fold > somefile.txt`
(cr) (lf) ↓

- What does it do?



- What are some of the problems?

- Problems are caused by the way pipes work

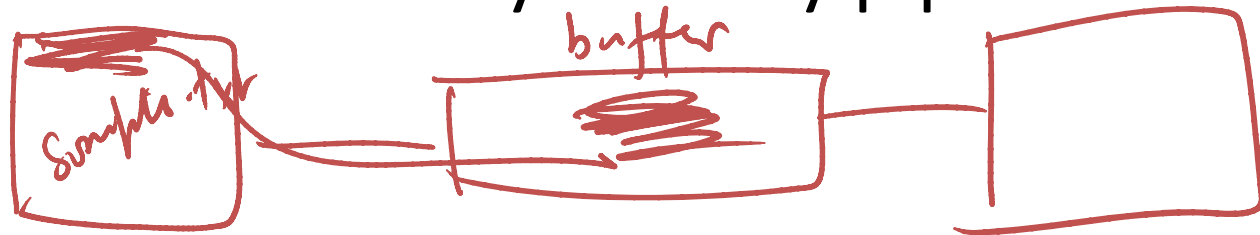

How does pipes work

- A finite buffer to allow communication between processes
 - Typically size 8K
- If input file is less than the buffer
 - We may be ok
- What if input file is more than the buffer
 - Redirecting output to the same file is a bad idea

How to deal with this?

- **Use a temp file**
 - `cat file | tr -d "\015" "\012" | fold > file.tmp`
 - `mv file.tmp file`
- **Better process**
 - `cat file | tr -d "\015" "\012" | fold > "/usr/tmp/file.$$"`
 - `mv "/usr/tmp/file.$$" "file"`
- **/usr/tmp** is cleared upon reboot

Process ID

Pipes, Loops and Sub shells

```
#!/bin/sh
```

```
FILE=$1
```

```
cat $FILE |
```

```
while read value
```

```
do
```

```
    echo ${value}
```

```
done
```

— shell

Subshell

- while loop is executed in a sub shell

What is the problem?

```
#!/bin/sh
FILE=${1}
max=0
cat ${FILE} |
while read value
do
    if [ ${value} -gt ${max} ];
    then
        max=${value}
    fi
done
echo ${max}
```

10
20
30
40

Sub shell

The fix

```
#!/bin/sh
FILE=${1}
max=0
values=`cat $FILE`
for value in ${values}
do  if [ ${value} -gt ${max} ];
    then
        max=${value}
    fi
done
echo ${max}
```

Arrays in bash

```
array[2]=23  
array[3]=45  
array[1]=4
```

To dereference an array variable, we can use, for example

```
echo ${array[1]}
```

Array elements need not be consecutive and some members of the array can be left uninitialized. Here is an example of printing an array in bash. Note the C style loop. Also note the spaces between tokens.

```
for (( i=1 ; i<=3 ; i++ ))  
do  
    echo ${array[$i]}  
done
```

Coding Examples

```
#!/bin/sh
# run the script as: sh closehandin.sh SL/SL1 all.txt

dir=$1
basedir="/afs/andrew/course/15/123/handin"

cat $2 |
while read id
do
  fs sa $basedir/$dir/$id $id l
  fs sa $basedir/$dir/$id system:anyuser l
  fs sa $basedir/$dir/$id ylung all
  fs sa $basedir/$dir/$id areece all
  fs sa $basedir/$dir/$id jmburges all
  fs sa $basedir/$dir/$id mengh all
done
```

```
message=`printf "Dear Student, If you are still interested in submitting $1 please submit the
directly to /afs/andrew/course/15/123/handin/$1/id/$2. If you receive this message in an error
ease ignore. Thanks. guna"`
cat "notsubmitted.txt" |
while read id
do
  basemail=$id"@andrew.cmu.edu"
  echo $message | mailx -s "$subj" "$basemail"
  #mkdir $basedir/$1/$id/$2
  fs sa $basedir/$1/$id/$2 $id all
  fs sa $basedir/$1/$id/$2 system:anyuser none
  fs sa $basedir/$1/$id/$2 tgt all
  fs sa $basedir/$1/$id/$2 jharbuck all
  fs sa $basedir/$1/$id/$2 jnfeinst all
  fs sa $basedir/$1/$id/$2 haoranz all

done

echo $message | mailx -s "$subj" "$baseinstrmail"
```