


Unary Query Processing Operators

15-415, Spring 2003, Lecture 8
Not in the Textbook!



A "Slice" Through Query Processing

- We'll study single-table queries today
 - SQL details
 - Query Executor Architecture
 - Simple Query "Optimization"

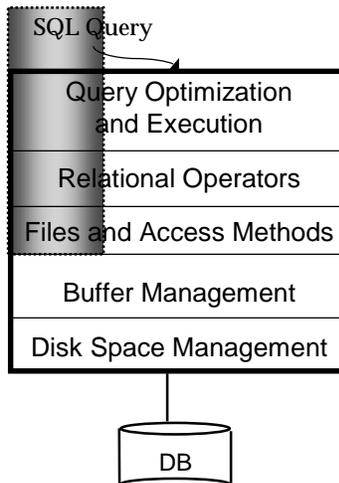



Basic Single-Table Queries

- **SELECT [DISTINCT] <column expression list>**
FROM <single table>
[WHERE <predicate>]
[GROUP BY <column list>
[HAVING <predicate>]]
[ORDER BY <column list>]



Basic Single-Table Queries

- **SELECT [DISTINCT] <column expression list>**
FROM <single table>
[WHERE <predicate>]
[GROUP BY <column list>
[HAVING <predicate>]]
[ORDER BY <column list>]
- **Simplest version is straightforward**
 - Produce all tuples in the table that satisfy the predicate
 - Output the expressions in the SELECT list
 - Expression can be a column reference, or an arithmetic expression over column refs



Basic Single-Table Queries

- **SELECT S.name, S.gpa
FROM Students S
WHERE S.dept = 'CS'
[GROUP BY <column list>
[HAVING <predicate>]]
[ORDER BY <column list>]**
- **Simplest version is straightforward**
 - Produce all tuples in the table that satisfy the predicate
 - Output the expressions in the SELECT list
 - Expression can be a column reference, or an arithmetic expression over column refs



SELECT DISTINCT

- **SELECT DISTINCT S.name, S.gpa
FROM Students S
WHERE S.dept = 'CS'
[GROUP BY <column list>
[HAVING <predicate>]]
[ORDER BY <column list>]**
- **DISTINCT flag specifies removal of duplicates before output**



ORDER BY

- **SELECT DISTINCT S.name, S.gpa, S.age*2 AS a2
FROM Students S
WHERE S.dept = 'CS'
[GROUP BY <column list>
[HAVING <predicate>]]
ORDER BY S.gpa, S.name, a2;**
- **ORDER BY** clause specifies that output should be sorted
 - Lexicographic ordering again!
- **Obviously must refer to columns in the output**
 - Note the AS clause for naming output columns!



ORDER BY

- **SELECT DISTINCT S.name, S.gpa
FROM Students S
WHERE S.dept = 'CS'
[GROUP BY <column list>
[HAVING <predicate>]]
ORDER BY S.gpa DESC, S.name ASC;**
- **Ascending order by default, but can be overridden**
 - DESC flag for descending, ASC for ascending
 - Can mix and match, lexicographically



Aggregates

- **SELECT [DISTINCT] AVERAGE(S.gpa)
FROM Students S
WHERE S.dept = 'CS'
[GROUP BY <column list>
[HAVING <predicate>]
[ORDER BY <column list>]**
- Before producing output, compute a summary (a.k.a. an *aggregate*) of some arithmetic expression
- Produces 1 row of output
 - with one column in this case
- Other aggregates: SUM, COUNT, MAX, MIN
- Note: can use DISTINCT *inside* the agg function
 - SELECT COUNT(DISTINCT S.name) FROM Students S
 - vs. SELECT DISTINCT COUNT (S.name) FROM Students S;



GROUP BY

- **SELECT [DISTINCT] AVERAGE(S.gpa), S.dept
FROM Students S
[WHERE <predicate>]
GROUP BY S.dept
[HAVING <predicate>]
[ORDER BY <column list>]**
- Partition the table into groups that have the same value on GROUP BY columns
 - Can group by a list of columns
- Produce an aggregate result per group
 - Cardinality of output = # of distinct group values
- Note: can put grouping columns in SELECT list
 - For aggregate queries, SELECT list can contain aggs and GROUP BY columns only!
 - What would it mean if we said SELECT S.name, AVERAGE(S.gpa) above??



HAVING

- **SELECT [DISTINCT] AVERAGE(S.gpa), S.dept
FROM Students S
[WHERE <predicate>
GROUP BY S.dept
HAVING COUNT(*) > 5
[ORDER BY <column list>**
- The HAVING predicate is applied *after* grouping and aggregation
 - Hence can contain anything that could go in the SELECT list
 - I.e. aggs or GROUP BY columns
- HAVING can only be used in aggregate queries
- It's an optional clause




Putting it all together

- **SELECT S.dept, AVERAGE(S.gpa), COUNT(*)
FROM Students S
WHERE S.gender = "F"
GROUP BY S.dept
HAVING COUNT(*) > 5
ORDER BY S.dept;**



Context



- We looked at SQL
- Now shift gears and look at Query Processing

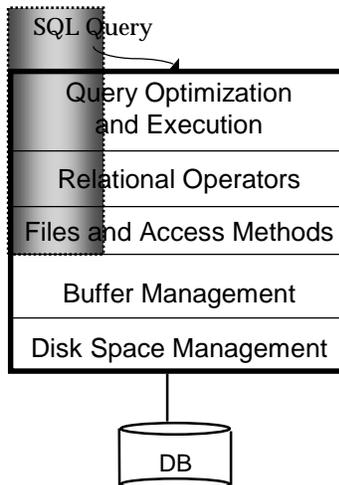

Query Processing Overview

- The *query optimizer* translates SQL to a special internal "language"
 - Query Plans
- The *query executor* is an *interpreter* for query plans
- Think of query plans as "box-and-arrow" *dataflow* diagrams
 - Each box implements a *relational operator*
 - Edges represent a flow of tuples (columns as specified)
 - For single-table queries, these diagrams are straight-line graphs

**SELECT DISTINCT name, gpa
FROM Students**

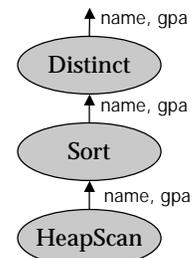



Iterators

iterator

- The relational operators are all subclasses of the class iterator:

```
class iterator {
    void init();
    tuple next();
    void close();
    iterator &inputs[];
    // additional state goes here
}
```

- **Note:**
 - Edges in the graph are specified by inputs (max 2, usually)
 - Encapsulation: any iterator can be input to any other!
 - When subclassing, different iterators will keep different kinds of state information



Example: Sort

```
class Sort extends iterator {
    void init();
    tuple next();
    void close();
    iterator &inputs[1];
    int numberOfRuns;
    DiskBlock runs[];
    RID nextRID[];
}
```

- **init():**
 - generate the sorted runs on disk
 - Allocate runs[] array and fill in with disk pointers.
 - Initialize numberOfRuns
 - Allocate nextRID array and initialize to NULLs
- **next():**
 - nextRID array tells us where we're "up to" in each run
 - find the next tuple to return based on nextRID array
 - advance the corresponding nextRID entry
 - return tuple (or EOF -- "End of Fun" -- if no tuples remain)
- **close():**
 - deallocate the runs and nextRID arrays




Postgres Version

- `src/backend/executor/nodeSort.c`
 - ExecInitSort (init)
 - ExecSort (next)
 - ExecEndSort (close)
- **The encapsulation stuff is hardwired into the Postgres C code**
 - Postgres predates even C++!
 - See `src/backend/execProcNode.c` for the code that “dispatches the methods” explicitly!



Sort GROUP BY: Naïve Solution

- The Sort iterator (could be external sorting, as explained last week) naturally permutes its input so that all tuples are output in sequence
- The Aggregate iterator keeps running info (“transition values”) on agg functions in the SELECT list, per group
 - E.g., for COUNT, it keeps count-so-far
 - For SUM, it keeps sum-so-far
 - For AVERAGE it keeps sum-so-far *and* count-so-far
- **As soon as the Aggregate iterator sees a tuple from a new group:**
 1. It produces an output for the old group based on the agg function
E.g. for AVERAGE it returns (sum-so-far/count-so-far)
 2. It resets its running info.
 3. It updates the running info with the new tuple’s info







An Alternative to Sorting: Hashing!

- **Idea:**
 - Many of the things we use sort for don't exploit the *order* of the sorted data
 - E.g.: forming groups in GROUP BY
 - E.g.: removing duplicates in DISTINCT
- **Often good enough to match all tuples with equal field-values**
- **Hashing does this!**
 - And may be cheaper than sorting! (Hmmm...!)
 - But how to do it for data sets bigger than memory??




General Idea

- **Two phases:**
 - Partition: use a hash function h_p to split tuples into partitions on disk.
 - We know that all matches live in the same partition.
 - Partitions are "spilled" to disk via output buffers
 - ReHash: for each partition on disk, read it into memory and build a main-memory hash table based on a hash function h_r
 - Then go through each bucket of this hash table to bring together matching tuples

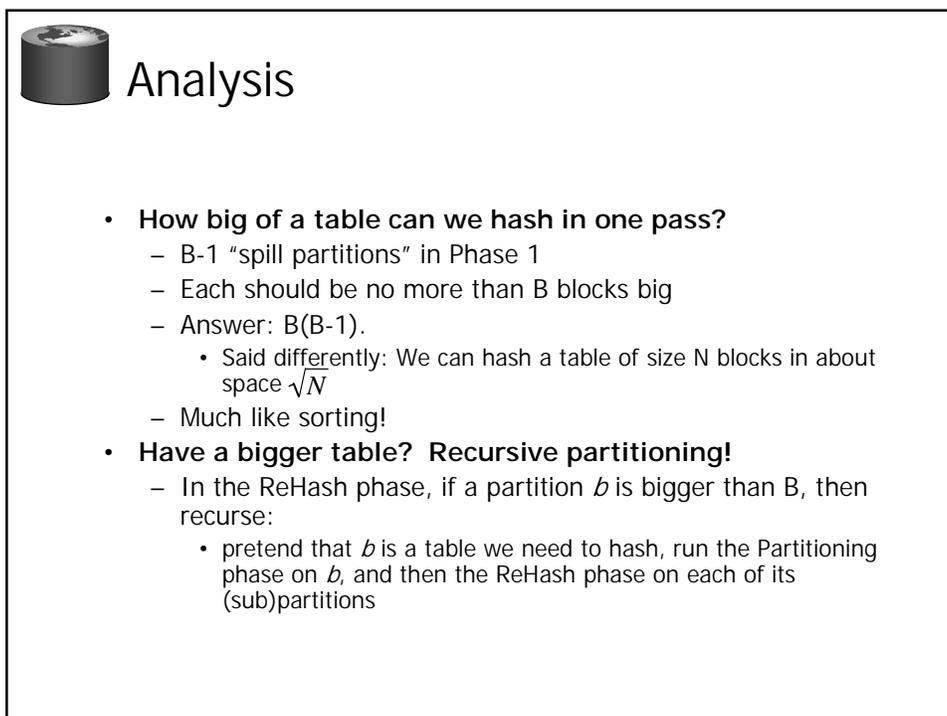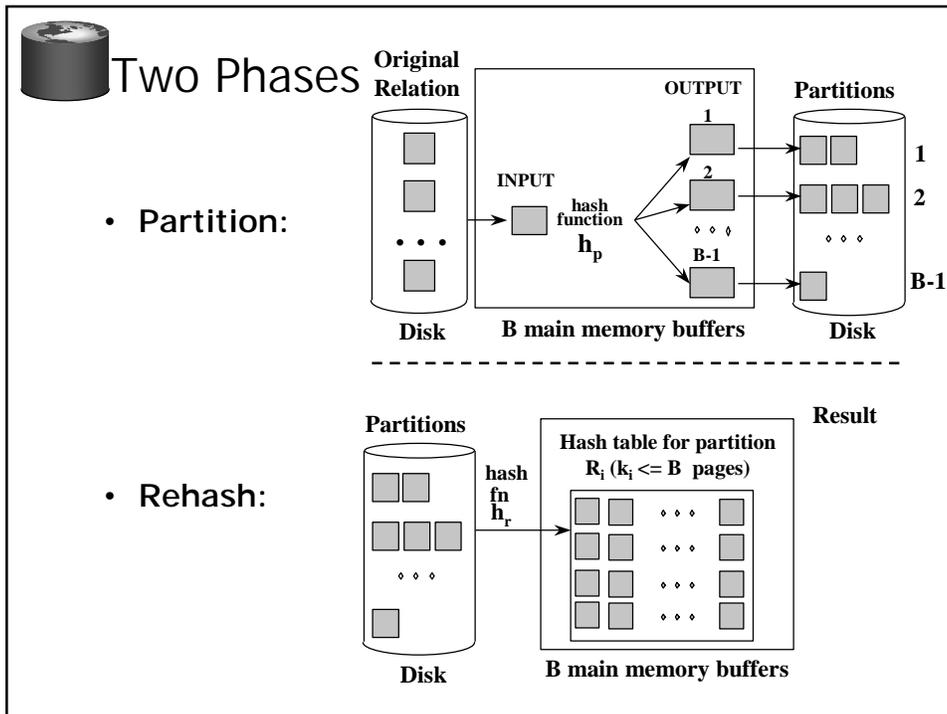




Hash GROUP BY: Naïve Solution (similar to the Sort GROUPBY)



- The Hash iterator permutes its input so that all tuples are output in sequence (how?)
- The Aggregate iterator keeps running info (“transition values”) on agg functions in the SELECT list, per group
 - E.g., for COUNT, it keeps count-so-far
 - For SUM, it keeps sum-so-far
 - For AVERAGE it keeps sum-so-far *and* count-so-far
- When the Aggregate iterator sees a tuple from a new group:
 1. It produces an output for the old group based on the agg function
E.g. for AVERAGE it returns (sum-so-far/count-so-far)
 2. It resets its running info.
 3. It updates the running info with the new tuple's info



We Can Do Better!




- **Combine the summarization into the hashing process**
 - During the ReHash phase, don't store tuples, store pairs of the form <GroupVals, TransVals>
 - When we want to insert a new tuple into the hash table
 - If we find a matching GroupVals, just update the TransVals appropriately
 - Else insert a new <GroupVals, TransVals> pair
- **What's the benefit?**
 - Q: How many pairs will we have to handle?
 - A: Number of distinct values of GroupVals columns
 - Not the number of tuples!!
 - Also probably “narrower” than the tuples
- **Can we play the same trick during sorting?**




Even Better: Hybrid Hashing

- What if the set of $\langle \text{GroupVals}, \text{TransVals} \rangle$ pairs fits in memory
 - It would be a waste to spill it to disk and read it all back!
 - Recall this could be true even if there are *tons* of tuples!
- Idea: keep a smaller 1st partition in memory during phase 1!
 - Output its stuff at the end of Phase 1.
 - Q: how do we choose the number k ?

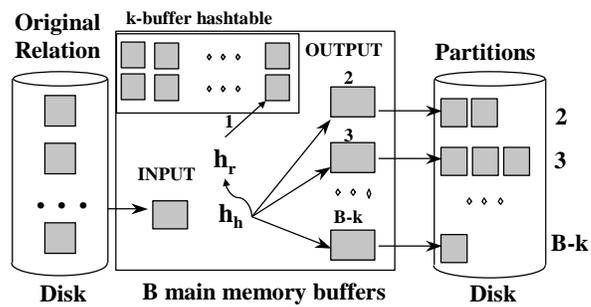

A Hash Function for Hybrid Hashing


- Assume we like the hash-partition function h_p
- Define h_n operationally as follows:
 - $h_n(x) = 1$ if in-memory hashtable is not yet full
 - $h_n(x) = 1$ if x is already in the hashtable
 - $h_n(x) = h_p(x)$ otherwise
- This ensures that:
 - Bucket 1 fits in k pages of memory
 - If the entire set of distinct hashtable entries is smaller than k , we do *no spilling!*

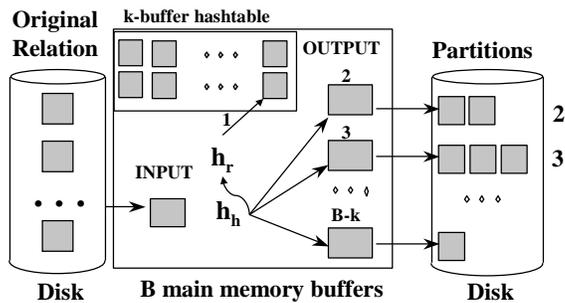




Context

- We looked at SQL
- We looked at Query Execution
 - Query plans & Iterators
 - A specific example
- How do we map from SQL to query plans?

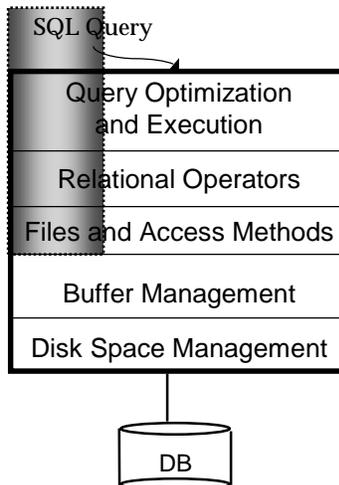

Query Optimization

- A deep subject, focuses on multi-table queries
 - We will only need a cookbook version for now.
- Build the dataflow bottom up:
 - Choose an Access Method (HeapScan or IndexScan)
 - Non-trivial, we'll learn about this later!
 - Next apply any WHERE clause filters
 - Next apply GROUP BY and aggregation
 - Can choose between sorting and hashing!
 - Next apply any HAVING clause filters
 - Next Sort to help with ORDER BY and DISTINCT
 - In absence of ORDER BY, can do DISTINCT via hashing!
 - Note: Where did SELECT clause go?
 - Implicit!!

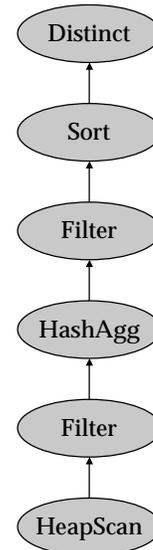



Summary

- **Single-table SQL, in detail**
- **Exposure to query processing architecture**
 - Query optimizer translates SQL to a query plan
 - Query executor “interprets” the plan
 - Query plans are graphs of iterators
- **Hashing is a useful alternative to sorting**
 - For many but not all purposes