

Principles of Software Construction: Objects, Design, and Concurrency

Part 1: Designing classes

Design patterns for reuse, part 2

Josh Bloch

Charlie Garrod



Administrivia

- Reading due today: UML and Patterns Chapters 9 and 10
- Optional reading for Thursday:
 - UML and Patterns Chapter 17
 - Effective Java items 49, 54, and 69
- Homework 3 due Sunday at 11:59 p.m.
- Midterm exam next Thursday (February 13th)
 - Review session Wednesday, February 12th 6-8 pm, DH A302
 - Practice exam coming this weekend



Key concepts from last Thursday

UML you should know

- Interfaces vs. classes
- Fields vs. methods
- Relationships:
 - "extends" (inheritance)
 - "implements" (realization)
 - "has a" (aggregation)
 - non-specific association
- Visibility: + (public) - (private) # (protected)
- Basic best practices...

Design patterns

- Carpentry:
 - "Is a dovetail joint or a miter joint better here?"
- Software Engineering:
 - "Is a strategy pattern or a template method better here?"

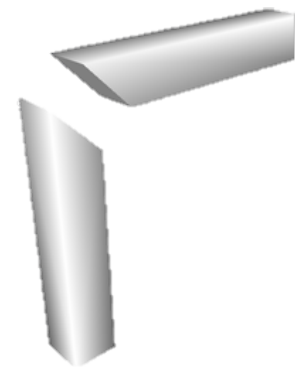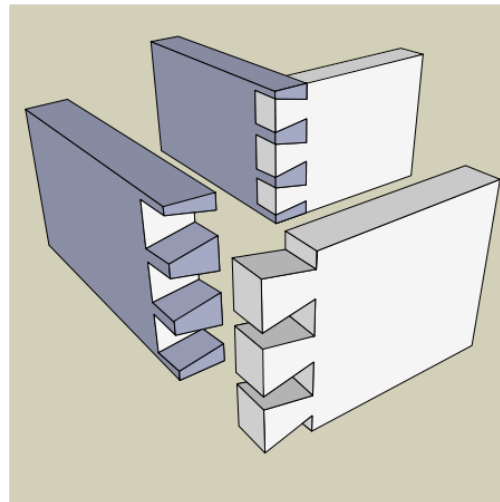

Elements of a design pattern

- Name
- Abstract description of problem
- Abstract description of solution
- Analysis of consequences

Strategy pattern

- Problem: Clients need different variants of an algorithm
- Solution: Create an interface for the algorithm, with an implementing class for each variant of the algorithm
- Consequences:
 - Easily extensible for new algorithm implementations
 - Separates algorithm from client context
 - Introduces an extra interface and many classes:
 - Code can be harder to understand
 - Lots of overhead if the strategies are simple

Different patterns can have the same structure

Command pattern:

- Problem: Clients need to execute some (possibly flexible) operation without knowing the details of the operation
- Solution: Create an interface for the operation, with a class (or classes) that actually executes the operation
- Consequences:
 - Separates operation from client context
 - Can specify, queue, and execute commands at different times
 - Introduces an extra interface and classes:
 - Code can be harder to understand
 - Lots of overhead if the commands are simple

Template method pattern

- Problem: An algorithm consists of customizable parts and invariant parts
- Solution: Implement the invariant parts of the algorithm in an abstract class, with abstract (unimplemented) primitive operations representing the customizable parts of the algorithm. Subclasses customize the primitive operations
- Consequences
 - Code reuse for the invariant parts of algorithm
 - Customization is restricted to the primitive operations
 - Inverted (Hollywood-style) control for customization

Template method vs. the strategy pattern

- Template method uses inheritance to vary part of an algorithm
 - Template method implemented in supertype, primitive operations implemented in subtypes
- Strategy pattern uses delegation to vary the entire algorithm
 - Strategy objects are reusable across multiple classes
 - Multiple strategy objects are possible per class

Today

- More design patterns for reuse
 - Iterator pattern
 - Decorator pattern
- Design goals and design principles

Traversing a collection

- Since Java 1.0:

```
Vector arguments = ...;
for (int i = 0; i < arguments.size(); ++i) {
    System.out.println(arguments.get(i));
}
```

- Java 1.5: enhanced for loop

```
List<String> arguments = ...;
for (String s : arguments) {
    System.out.println(s);
}
```

- For-each loop works for every implementation of Iterable

```
public interface Iterable<E> {
    public Iterator<E> iterator();
}
```

The Iterator interface

```
public interface java.util.Iterator<E> {  
    boolean hasNext();  
    E next();  
    void remove(); // removes previous returned item  
} // from the underlying collection
```

- To use explicitly, e.g.:

```
List<String> arguments = ...;  
for (Iterator<String> it = arguments.iterator();  
     it.hasNext(); ) {  
    String s = it.next();  
    System.out.println(s);  
}
```

Getting an Iterator

```
public interface Collection<E> extends Iterable<E> {  
    boolean    add(E e);  
    boolean    addAll(Collection<? extends E> c);  
    boolean    remove(Object e);  
    boolean    removeAll(Collection<?> c);  
    boolean    retainAll(Collection<?> c);  
    boolean    contains(Object e);  
    boolean    containsAll(Collection<?> c);  
    void       clear();  
    int        size();  
    boolean    isEmpty();  
    Iterator<E> iterator();  
    Object[]   toArray();  
    <T> T[]    toArray(T[] a);  
    ...  
}
```

Defines an interface for creating an Iterator, but allows Collection implementation to decide which Iterator to create.

An Iterator implementation for Pairs

```
public class Pair<E> {  
    private final E first, second;  
    public Pair(E f, E s) { first = f; second = s; }  
}
```

```
Pair<String> pair = new Pair<String>("foo", "bar");  
for (String s : pair) { ... }
```

An Iterator implementation for Pairs

```
public class Pair<E> implements Iterable<E> {
    private final E first, second;
    public Pair(E f, E s) { first = f; second = s; }
    public Iterator<E> iterator() {
        return new PairIterator();
    }
    private class PairIterator implements Iterator<E> {
        private boolean seenFirst = false, seenSecond = false;
        public boolean hasNext() { return !seenSecond; }
        public E next() {
            if (!seenFirst) { seenFirst = true; return first; }
            if (!seenSecond) { seenSecond = true; return second; }
            throw new NoSuchElementException();
        }
        public void remove() {
            throw new UnsupportedOperationException();
        }
    }
}
```

```
Pair<String> pair = new Pair<String>("foo", "bar");
for (String s : pair) { ... }
```


Iterator design pattern

- Problem: Clients need uniform strategy to access all elements in a container, independent of the container type
 - Order is unspecified, but access every element once
- Solution: A strategy pattern for iteration
- Consequences:
 - Hides internal implementation of underlying container
 - Easy to change container type
 - Facilitates communication between parts of the program

Using a `java.util.Iterator<E>`: A warning

- The default Collections implementations are mutable...
- ...but their `Iterator` implementations assume the collection does not change while the `Iterator` is being used
 - You will get a `ConcurrentModificationException`

Using a `java.util.Iterator<E>`: A warning

- The default Collections implementations are mutable...
- ...but their `Iterator` implementations assume the collection does not change while the `Iterator` is being used

- You will get a `ConcurrentModificationException`
- If you simply want to remove an item:

```
List<String> arguments = ...;
for (Iterator<String> it = arguments.iterator();
     it.hasNext(); ) {
    String s = it.next();
    if (s.equals("Charlie"))
        arguments.remove("Charlie"); // runtime error
}
```

Using a `java.util.Iterator<E>`: A warning

- The default Collections implementations are mutable...
- ...but their `Iterator` implementations assume the collection does not change while the `Iterator` is being used

- You will get a `ConcurrentModificationException`
- If you simply want to remove an item:

```
List<String> arguments = ...;
for (Iterator<String> it = arguments.iterator();
     it.hasNext(); ) {
    String s = it.next();
    if (s.equals("Charlie"))
        it.remove();
}
```


Today

- More design patterns for reuse
 - Iterator pattern
 - Decorator pattern
- Design goals and design principles

Limitations of inheritance


- Suppose you want various extensions of a Stack data structure...
 - UndoStack: A stack that lets you undo previous push or pop operations
 - SecureStack: A stack that requires a password
 - SynchronizedStack: A stack that serializes concurrent accesses

Limitations of inheritance

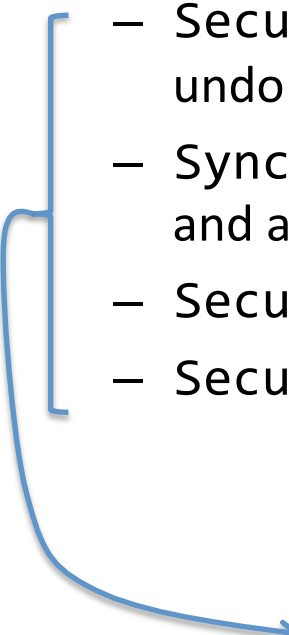- Suppose you want various extensions of a Stack data structure...
 - UndoStack: A stack that lets you undo previous push or pop operations
 - SecureStack: A stack that requires a password
 - SynchronizedStack: A stack that serializes concurrent accesses
 - SecureUndoStack: A stack that requires a password, and also lets you undo previous operations
 - SynchronizedUndoStack: A stack that serializes concurrent accesses, and also lets you undo previous operations
 - SecureSynchronizedStack: ...
 - SecureSynchronizedUndoStack: ...
- 

Goal: arbitrarily composable extensions

Limitations of inheritance

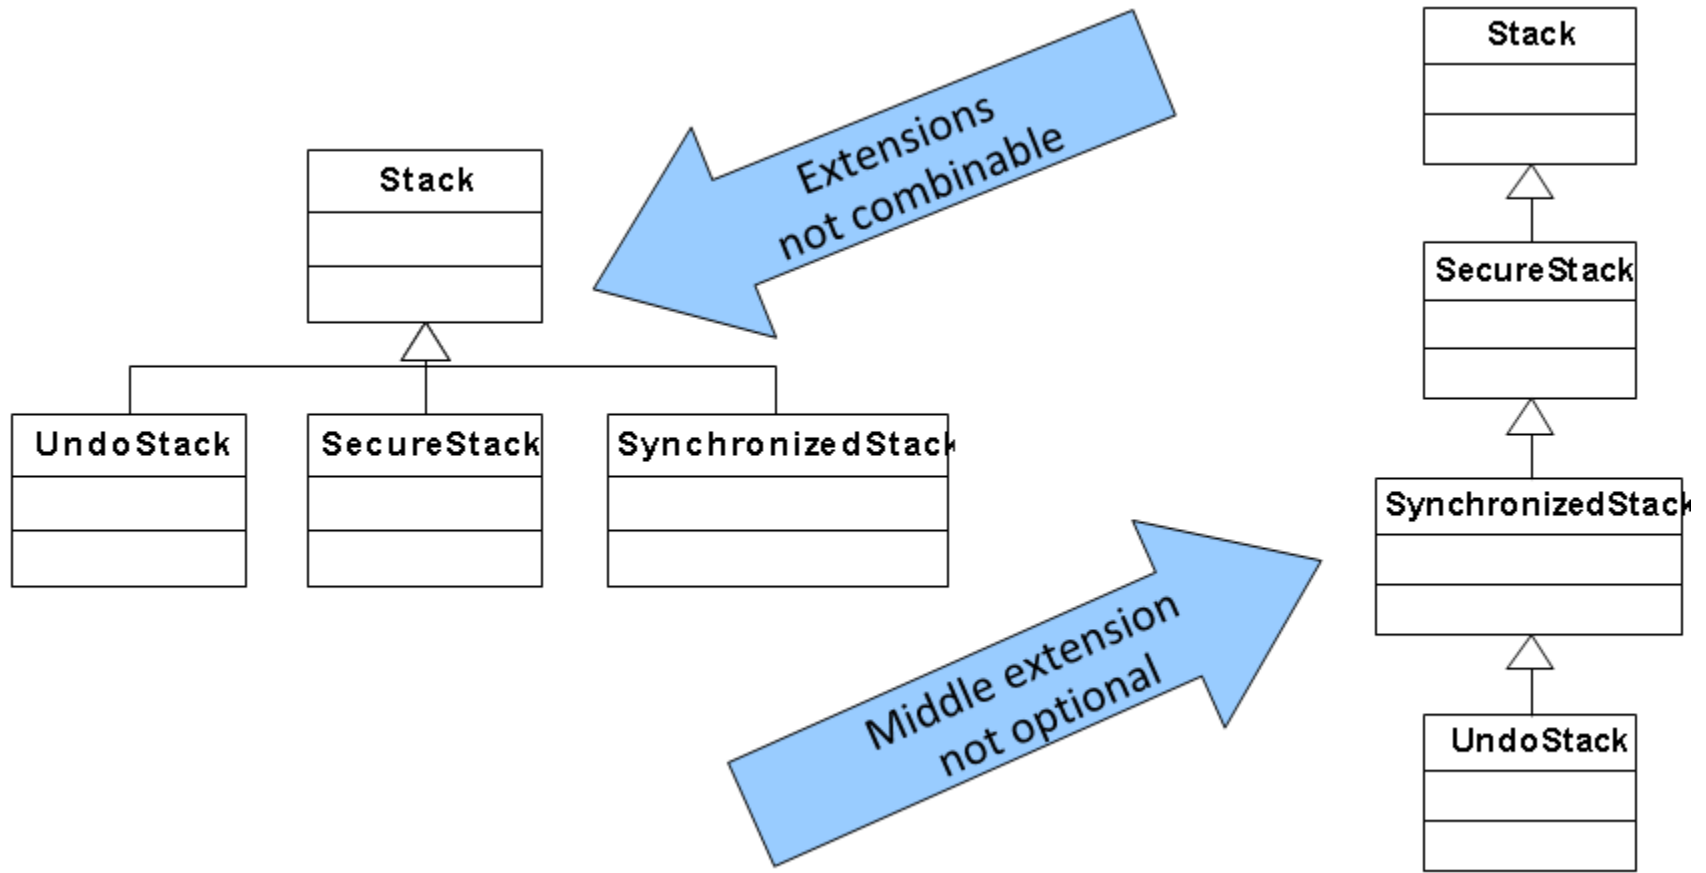

Workarounds?

- Combining inheritance hierarchies?
- Multiple inheritance?

The decorator design pattern

- Problem: You need arbitrary or dynamically composable extensions to individual objects.
- Solution: Implement a common interface as the object you are extending, add functionality, but delegate primary responsibility to an underlying object.
- Consequences:
 - More flexible than static inheritance
 - Customizable, cohesive extensions
 - Breaks object identity, self-references

Decorators use both subtyping and delegation

```
public class LoggingList<E> implements List<E> {
    private final List<E> list;
    public LoggingList<E>(List<E> list) { this.list = list; }
    public boolean add(E e) {
        System.out.println("Adding " + e);
        return list.add(e);
    }
    public E remove(int index) {
        System.out.println("Removing at " + index);
        return list.remove(index);
    }
    ...
}
```

An AbstractStackDecorator forwarding class

```
public abstract class AbstractStackDecorator
    implements Stack {
    private final Stack stack;
    public AbstractStackDecorator(Stack stack) {
        this.stack = stack;
    }
    public void push(Item e) {
        stack.push(e);
    }
    public Item pop() {
        return stack.pop();
    }
    ...
}
```

Concrete decorator classes

```
public class UndoStack extends AbstractStackDecorator
    implements Stack {
    private final UndoLog log = new UndoLog();
    public UndoStack(Stack stack) { super(stack); }
    public void push(Item e) {
        log.append(UndoLog.PUSH, e);
        super.push(e);
    }
    ...
}
```

Using the decorator classes

- To construct a plain stack:
`Stack stack = new ArrayStack();`
- To construct an undo stack:

Using the decorator classes

- To construct a plain stack:

```
Stack stack = new ArrayStack();
```

- To construct an undo stack:

```
UndoStack stack = new UndoStack(new ArrayStack());
```

Using the decorator classes

- To construct a plain stack:
`Stack stack = new ArrayStack();`
- To construct an undo stack:
`UndoStack stack = new UndoStack(new ArrayStack());`
- To construct a secure synchronized undo stack:

Using the decorator classes

- To construct a plain stack:
`Stack s = new ArrayStack();`
- To construct an undo stack:
`UndoStack s = new UndoStack(new ArrayStack());`
- To construct a secure synchronized undo stack:
`SecureStack s = new SecureStack(new SynchronizedStack(
new UndoStack(new ArrayStack())));`

Decorators from `java.util.Collections`

- Turn a mutable collection into an immutable collection:

```
static List<T>  unmodifiableList(List<T>  lst);
static Set<T>   unmodifiableSet( Set<T>   set);
static Map<K,V> unmodifiableMap( Map<K,V> map);
```
- Similar for synchronization:

```
static List<T>  synchronizedList(List<T>  lst);
static Set<T>   synchronizedSet( Set<T>   set);
static Map<K,V> synchronizedMap( Map<K,V> map);
```

The UnmodifiableCollection (simplified excerpt)

```
public static <T> Collection<T> unmodifiableCollection(Collection<T> c)
    return new UnmodifiableCollection<>(c);
}
class UnmodifiableCollection<E> implements Collection<E>, Serializable
    final Collection<E> c;
    UnmodifiableCollection(Collection<> c) {this.c = c; }
    public int size() {return c.size();}
    public boolean isEmpty() {return c.isEmpty();}
    public boolean contains(Object o) {return c.contains(o);}
    public Object[] toArray() {return c.toArray();}
    public <T> T[] toArray(T[] a) {return c.toArray(a);}
    public String toString() {return c.toString();}
    public boolean add(E e) {throw new UnsupportedOperationException()}
    public boolean remove(Object o) { throw new UnsupportedOperationException()}
        public boolean containsAll(Collection<?> coll) { return
    public boolean addAll(Collection<? extends E> coll) { throw new
    public boolean removeAll(Collection<?> coll) { throw new Unsuppo
    public boolean retainAll(Collection<?> coll) { throw new Unsuppo
    public void clear() { throw new UnsupportedOperationException()}
}
```

The decorator pattern vs. inheritance

- Decorator composes features at run time
 - Inheritance composes features at compile time
- Decorator consists of multiple collaborating objects
 - Inheritance produces a single, clearly-typed object
- Can mix and match multiple decorations
 - Multiple inheritance is conceptually difficult

Today

- More design patterns for reuse
 - Iterator pattern
 - Decorator pattern
- Design goals and design principles

Metrics of software quality, i.e., *design goals*

Functional correctness Adherence of implementation to the specifications

Robustness Ability to handle anomalous events

Flexibility Ability to accommodate changes in specifications

Reusability Ability to be reused in another application

Efficiency Satisfaction of speed and storage requirements

Scalability Ability to serve as the basis of a larger version of the application

Security Level of consideration of application security




**Source: Braude, Bernstein,
Software Engineering. Wiley 2011**

Design principles: heuristics to achieve design goals

- Low coupling
- Low representational gap
- High cohesion

A design principle for reuse: *low coupling*

- Each component should depend on as few other components as possible

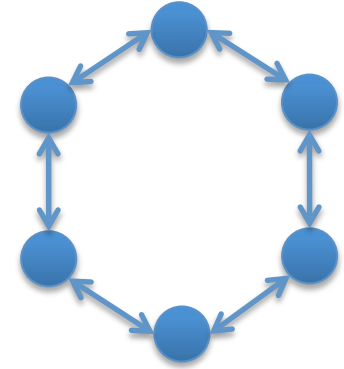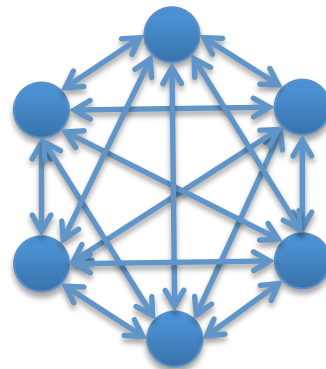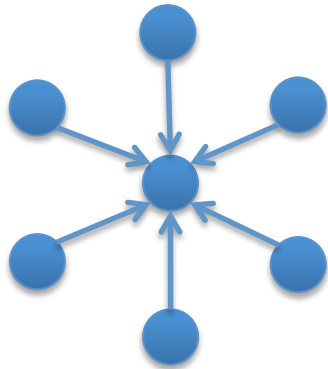

- Benefits of low coupling:
 - Enhances understandability
 - Reduces cost of change
 - Eases reuse

Law of Demeter

- "Only talk to your immediate friends"


~~foo.bar().baz().quz(42)~~

Representational gap


- Real-world concepts:



- Software concepts:

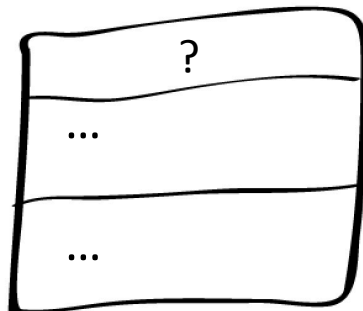

...



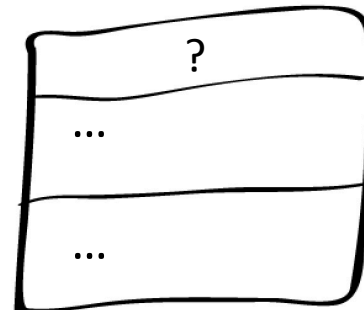


Representational gap

- Real-world concepts:



- Software concepts:

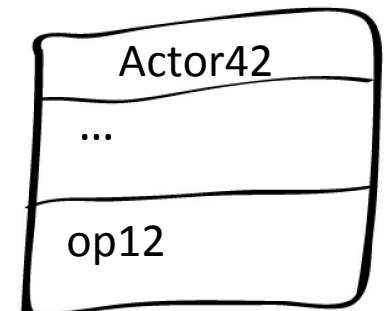
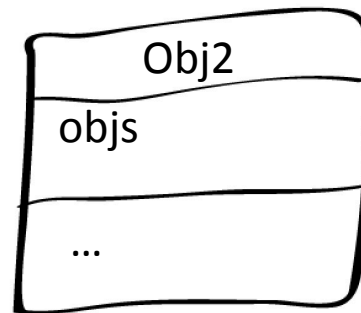
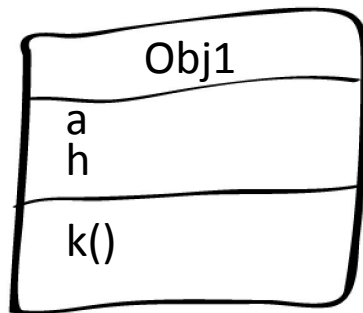


Representational gap

- Real-world concepts:



- Software concepts:

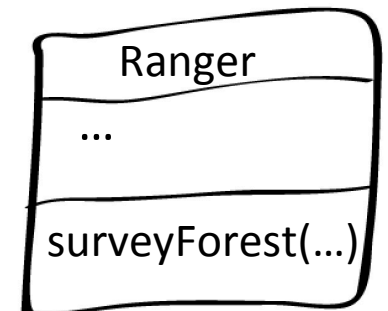
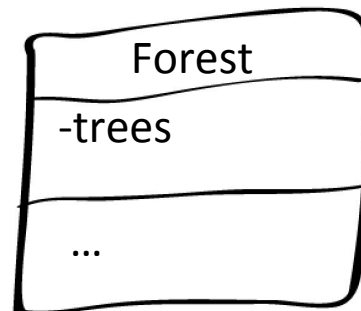
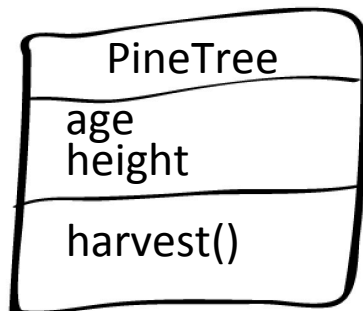


Benefits of low representational gap

- Facilitates understanding of design and implementation
- Facilitates traceability from problem to solution
- Facilitates evolution

A related design principle: high cohesion

- Each component should have a small set of closely-related responsibilities
- Benefits:
 - Facilitates understandability
 - Facilitates reuse
 - Eases maintenance

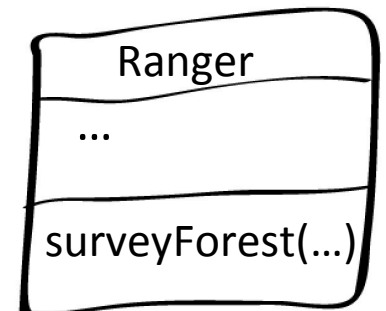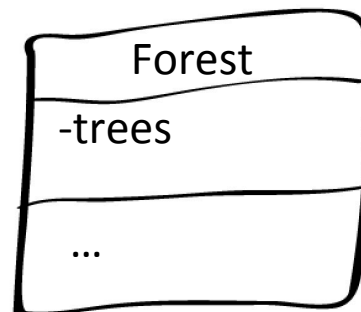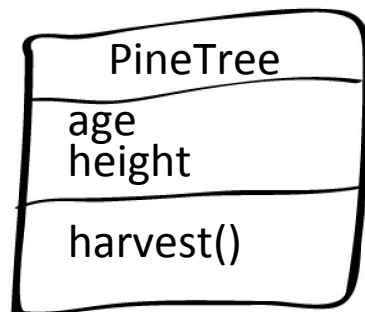

Coupling vs. cohesion

- All code in one component?
 - Low cohesion, low coupling
- Every statement / method in a separate component?
 - High cohesion, high coupling

Summary

- Five design patterns to facilitate reuse...
- Design principles are useful heuristics
 - Reduce coupling to increase understandability, reuse
 - Lower representational gap to increase understandability, maintainability
 - Increase cohesion to increase understandability

