


Probabilistic Graphical Models

Posterior Regularization: an integrative paradigm for learning GMs

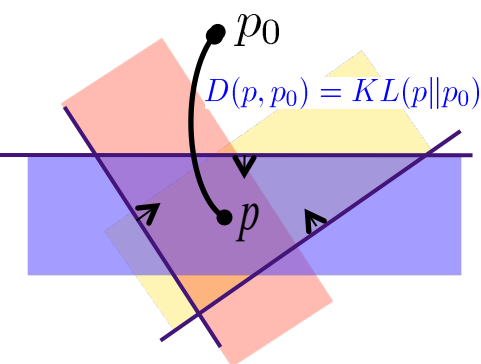



Eric Xing

(courtesy to Jun Zhu)


Lecture 24, April 13, 2015

Reading:

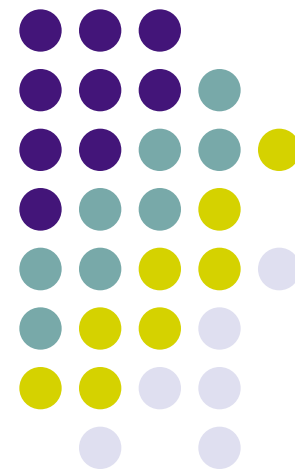




Learning GMs

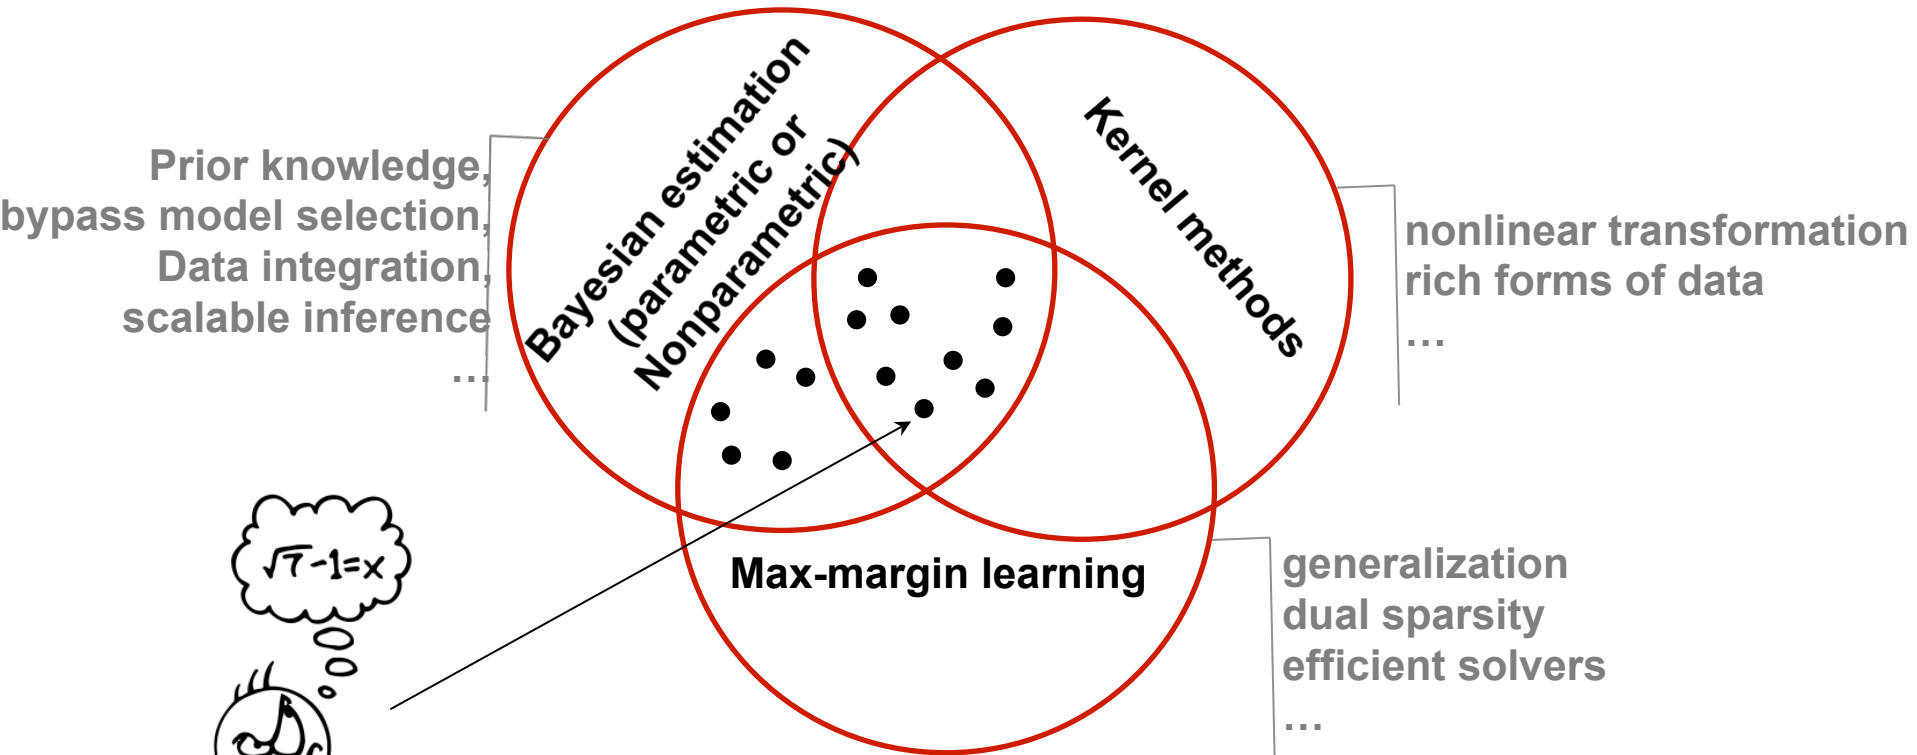

Regularized Bayesian Inference



Bayesian Inference

- A coherent framework of dealing with uncertainties


$$p(\mathcal{M}|\mathbf{x}) = \frac{p(\mathbf{x}|\mathcal{M})\pi(\mathcal{M})}{\int p(\mathbf{x}|\mathcal{M})\pi(\mathcal{M})d\mathcal{M}}$$

- M : a model from some hypothesis space
- x : observed data



Thomas Bayes (1702 – 1761)

- Bayes' rule offers a mathematically rigorous computational mechanism for combining prior knowledge with incoming evidence



Parametric Bayesian Inference

\mathcal{M} is represented as a finite set of parameters θ

- ◆ A **parametric** likelihood: $\mathbf{x} \sim p(\cdot|\theta)$
- ◆ Prior on θ : $\pi(\theta)$
- ◆ Posterior distribution

$$p(\theta|\mathbf{x}) = \frac{p(\mathbf{x}|\theta)\pi(\theta)}{\int p(\mathbf{x}|\theta)\pi(\theta)d\theta} \propto p(\mathbf{x}|\theta)\pi(\theta)$$

Examples:

- Gaussian distribution prior + 2D Gaussian likelihood → Gaussian posterior distribution
- Dirichlet distribution prior + 2D Multinomial likelihood → Dirichlet posterior distribution
- Sparsity-inducing priors + some likelihood models → Sparse Bayesian inference

Nonparametric Bayesian Inference



\mathcal{M} is a richer model, e.g., with an infinite set of parameters

- ◆ A **nonparametric** likelihood: $\mathbf{x} \sim p(\cdot|\mathcal{M})$
- ◆ Prior on \mathcal{M} : $\pi(\mathcal{M})$
- ◆ Posterior distribution

$$p(\mathcal{M}|\mathbf{x}) = \frac{p(\mathbf{x}|\mathcal{M})\pi(\mathcal{M})}{\int p(\mathbf{x}|\mathcal{M})\pi(\mathcal{M})d\mathcal{M}} \propto p(\mathbf{x}|\mathcal{M})\pi(\mathcal{M})$$


Examples:

→ see next slide

Nonparametric Bayesian Inference



probability measure

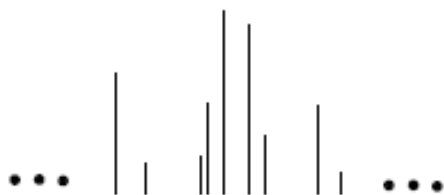


binary matrix

z_1	0	1	0	...
z_2	1	1	0	...
\vdots	\vdots	\vdots	\vdots	\vdots
z_n	0	1	1	...


Dirichlet Process Prior [Antoniak, 1974]
+ Multinomial/Gaussian/Softmax likelihood

Indian Buffet Process Prior [Griffiths & Gharamani, 2005]
+ Gaussian/Sigmoid/Softmax likelihood

function

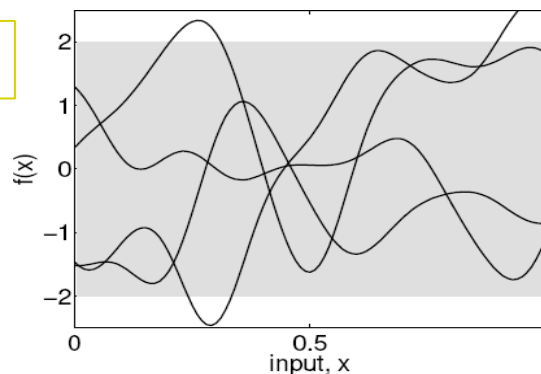


Gaussian Process Prior [Doob, 1944; Rasmussen & Williams, 2006]
+ Gaussian/Sigmoid/Softmax likelihood



Why Bayesian Nonparametrics?

- Let the data speak for themselves
- Bypass the model selection problem
 - let data determine model complexity (e.g., the number of components in mixture models)
 - allow model complexity to grow as more data observed

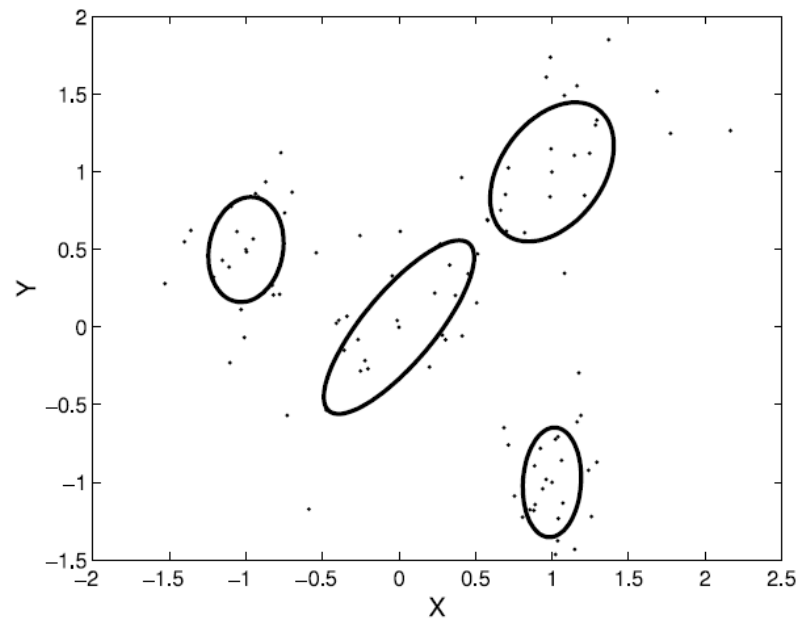

Can we further control the posterior distributions?




posterior likelihood model prior

$$p(\mathcal{M}|\mathbf{x}) = \frac{p(\mathbf{x}|\mathcal{M})\pi(\mathcal{M})}{\int p(\mathbf{x}|\mathcal{M})\pi(\mathcal{M})d\mathcal{M}}$$

It is desirable to further regularize the posterior distribution

- An extra freedom to perform Bayesian inference
- Arguably more direct to control the behavior of models
- Can be easier and more natural in some examples

Can we further control the posterior distributions?




posterior likelihood model prior


$$p(\mathcal{M}|\mathbf{x}) = \frac{p(\mathbf{x}|\mathcal{M})\pi(\mathcal{M})}{\int p(\mathbf{x}|\mathcal{M})\pi(\mathcal{M})d\mathcal{M}}$$

- **Directly control the posterior distributions?**
 - Not obvious how ...

hard constraints
(A single feasible space)

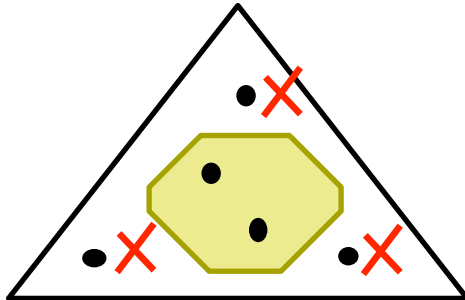

soft constraints
(many feasible subspaces with different complexities/penalties)

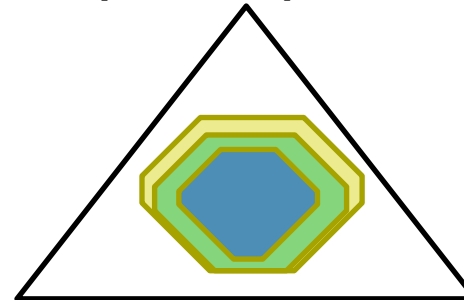

A reformulation of Bayesian inference



posterior likelihood model prior

$$p(\mathcal{M}|\mathbf{x}) = \frac{p(\mathbf{x}|\mathcal{M})\pi(\mathcal{M})}{\int p(\mathbf{x}|\mathcal{M})\pi(\mathcal{M})d\mathcal{M}}$$

- Bayes' rule is equivalent to:

$$\begin{aligned} \min_{p(\mathcal{M})} \quad & \text{KL}(p(\mathcal{M})||\pi(\mathcal{M})) - \mathbb{E}_{p(\mathcal{M})}[\log p(\mathbf{x}|\mathcal{M})] \\ \text{s.t. :} \quad & p(\mathcal{M}) \in \mathcal{P}_{\text{prob}}, \end{aligned}$$


A direct but trivial constraint on the posterior distribution

E.T. Jaynes (1988): “this fresh interpretation of Bayes’ theorem could make the use of Bayesian methods more attractive and widespread, and stimulate new developments in the general theory of inference”

[Zellner, Am. Stat. 1988]

Regularized Bayesian Inference

(Ganchev et al.'10)



$$\begin{aligned} \inf_{q(\mathbf{M}), \xi} \text{KL}(q(\mathbf{M}) \parallel \pi(\mathbf{M})) - \int_{\mathcal{M}} \log p(\mathcal{D} | \mathbf{M}) q(\mathbf{M}) d\mathbf{M} + U(\xi) \\ \text{s.t. : } q(\mathbf{M}) \in \mathcal{P}_{\text{post}}(\xi), \end{aligned}$$

where, **e.x.**,

$$\mathcal{P}_{\text{post}}(\xi) \stackrel{\text{def}}{=} \left\{ q(\mathbf{M}) \mid \forall t = 1, \dots, T, h(Eq(\psi_t; \mathcal{D})) \leq \xi_t \right\},$$



and

$$U(\xi) = \sum_{t=1}^T \mathbb{I}(\xi_t = \gamma_t) = \mathbb{I}(\xi = \gamma)$$

Solving such constrained optimization problem needs convex duality theory


So, where do the constraints come from?

Recall our evolution of the Max-Margin Learning Paradigms

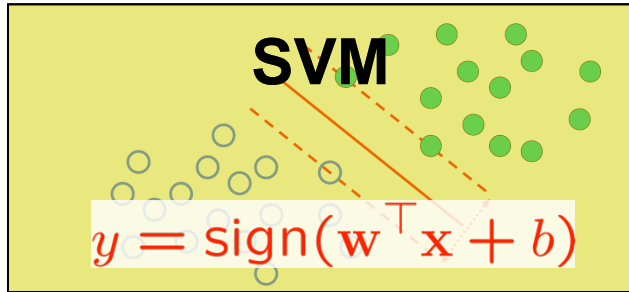


$$\min_{\mathbf{w}, \xi} \frac{1}{2} \|\mathbf{w}\|^2 + C \sum_{i=1}^m \xi_i$$

$$y^i(\mathbf{w}^\top \mathbf{x}^i + b) \geq 1 - \xi_i, \quad \forall i$$

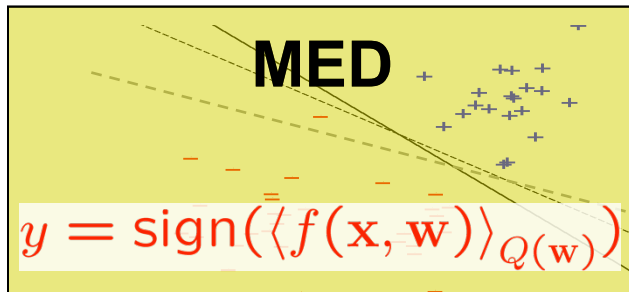


$$\min_Q \text{KL}(Q \| Q_0)$$

$$y^i \langle f(\mathbf{x}^i) \rangle_Q \geq \xi_i, \quad \forall i$$

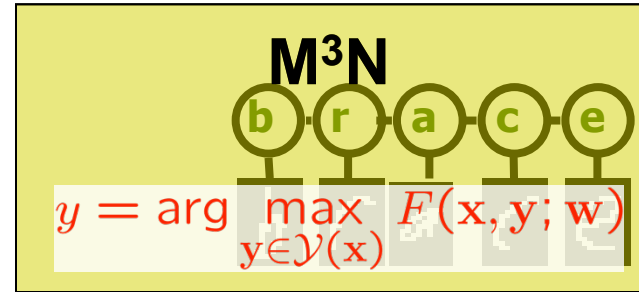

$$\min_{\mathbf{w}, \xi} \frac{1}{2} \|\mathbf{w}\|^2 + C \sum_{i=1}^m \xi_i$$

$$\mathbf{w}^\top [f(\mathbf{x}^i, \cdot)] - f(\mathbf{x}^i, y) \geq \ell(y^i, y) - \xi_i, \quad \forall i, \forall y \neq y^i$$

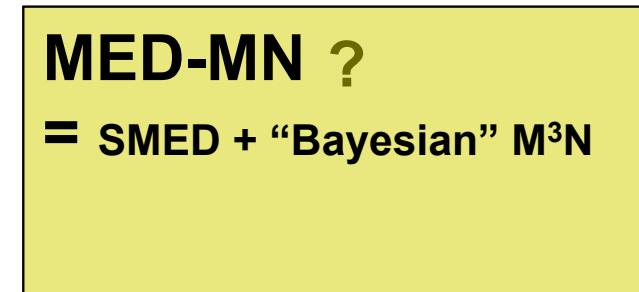

Maximum Entropy Discrimination Markov Networks



- Structured MaxEnt Discrimination (SMED):

$$P1 : \min_{p(\mathbf{w}), \xi} KL(p(\mathbf{w}) || p_0(\mathbf{w})) + U(\xi)$$

$$\text{s.t. } p(\mathbf{w}) \in \mathcal{F}_1, \xi_i \geq 0, \forall i.$$

generalized maximum entropy or regularized KL-divergence


- Feasible subspace of weight distribution:


$$\mathcal{F}_1 = \left\{ p(\mathbf{w}) : \int p(\mathbf{w}) [\Delta F_i(\mathbf{y}; \mathbf{w}) - \Delta \ell_i(\mathbf{y})] d\mathbf{w} \geq -\xi_i, \forall i, \forall \mathbf{y} \neq \mathbf{y}^i \right\},$$

expected margin constraints.


- Average from distribution of M³Ns

$$h_1(\mathbf{x}; p(\mathbf{w})) = \arg \max_{\mathbf{y} \in \mathcal{Y}(\mathbf{x})} \int p(\mathbf{w}) F(\mathbf{x}, \mathbf{y}; \mathbf{w}) d\mathbf{w}$$

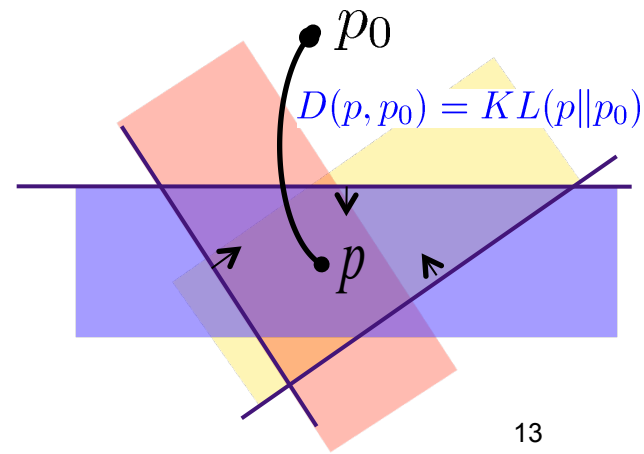



Can we use this scheme to learn models other than MN?



Recall the 3 advantages of MEDN

- An averaging Model: PAC-Bayesian prediction error guarantee (Theorem 3)


$$\Pr_Q(M(h, \mathbf{x}, \mathbf{y}) \leq 0) \leq \Pr_{\mathcal{D}}(M(h, \mathbf{x}, \mathbf{y}) \leq \gamma) + O\left(\sqrt{\frac{\gamma^{-2} KL(p||p_0) \ln(N|\mathcal{Y}|) + \ln N + \ln \delta^{-1}}{N}}\right).$$

- Entropy regularization: Introducing useful biases

- Standard Normal prior => reduction to standard M^3N (we've seen it)
- Laplace prior => Posterior shrinkage effects (sparse M^3N)


$$\min_{\mu, \xi} \sqrt{\lambda} \sum_{k=1}^K \left(\sqrt{\mu_k^2 + \frac{1}{\lambda}} - \frac{1}{\sqrt{\lambda}} \log \frac{\sqrt{\lambda \mu_k^2 + 1} + 1}{2} \right) + C \sum_{i=1}^N \xi_i$$

s.t. $\mu^T \Delta \mathbf{f}_i(\mathbf{y}) \geq \Delta \ell_i(\mathbf{y}) - \xi_i; \xi_i \geq 0, \forall i, \forall \mathbf{y} \neq \mathbf{y}^i.$

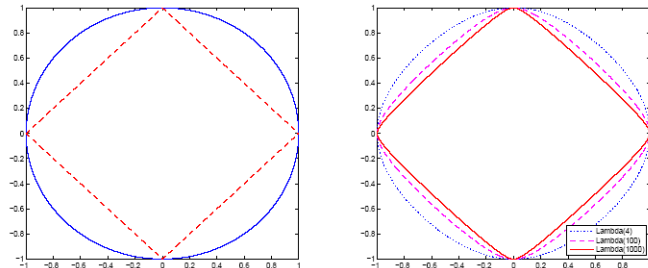

- Integrating Generative and Discriminative principles (next class)

- Incorporate latent variables and structures (PoMEN)
- Semisupervised learning (with partially labeled data)




Latent Hierarchical MaxEnDNet

- Web data extraction
 - Goal: *Name, Image, Price, Description, etc.*



- Hierarchical labeling
- Advantages:
 - Computational efficiency
 - Long-range dependency
 - Joint extraction

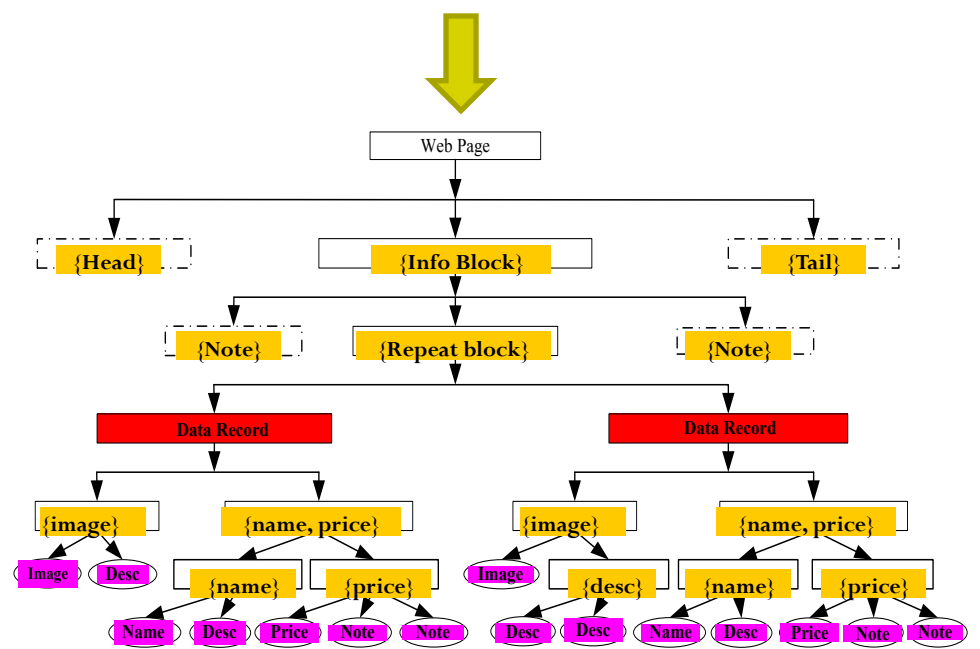

Partially Observed MaxEnDNet (PoMEN) (Zhu et al, NIPS 2008)




- Now we are given partially labeled data:

$$\mathcal{D} = \{ \langle \mathbf{x}^i, \mathbf{y}^i, \mathbf{z}^i \rangle \}_{i=1}^N$$

- PoMEN: learning $p(\mathbf{w}, \mathbf{z})$

$$\begin{aligned} \text{P2(PoMEN)} : \quad & \min_{p(\mathbf{w}, \{\mathbf{z}\}), \xi} KL(p(\mathbf{w}, \{\mathbf{z}\}) || p_0(\mathbf{w}, \{\mathbf{z}\})) + U(\xi) \\ & \text{s.t. } p(\mathbf{w}, \{\mathbf{z}\}) \in \mathcal{F}_2, \xi_i \geq 0, \forall i. \end{aligned}$$

$$\mathcal{F}_2 = \{ p(\mathbf{w}, \{\mathbf{z}\}) : \sum_{\mathbf{z}} \int p(\mathbf{w}, \mathbf{z}) [\Delta F_i(\mathbf{y}, \mathbf{z}; \mathbf{w}) - \Delta \ell_i(\mathbf{y})] d\mathbf{w} \geq -\xi_i, \forall i, \forall \mathbf{y} \neq \mathbf{y}^i \},$$

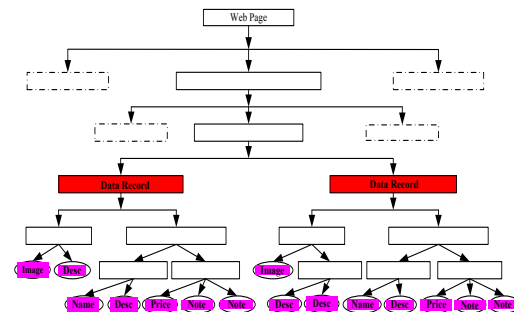

- Prediction: $h_2(\mathbf{x}) = \arg \max_{\mathbf{y} \in \mathcal{Y}(\mathbf{x})} \sum_{\mathbf{z}} \int p(\mathbf{w}, \mathbf{z}) F(\mathbf{x}, \mathbf{y}, \mathbf{z}; \mathbf{w}) d\mathbf{w}$



Alternating Minimization Alg.

- Factorization assumption:

$$p_0(\mathbf{w}, \{\mathbf{z}\}) = p_0(\mathbf{w}) \prod_{i=1}^N p_0(\mathbf{z}_i)$$

$$p(\mathbf{w}, \{\mathbf{z}\}) = p(\mathbf{w}) \prod_{i=1}^N p(\mathbf{z}_i)$$

- Alternating minimization:

- Step 1: keep $p(\mathbf{z})$ fixed, optimize over $p(\mathbf{w})$

$$\min_{p(\mathbf{w}), \xi} KL(p(\mathbf{w}) || p_0(\mathbf{w})) + C \sum_i \xi_i$$

$$\text{s.t. } p(\mathbf{w}) \in \mathcal{F}'_1, \xi_i \geq 0, \forall i.$$

$$\mathcal{F}'_1 = \{p(\mathbf{w}) : \int p(\mathbf{w}) E_{p(\mathbf{z})} [\Delta F_i(\mathbf{y}, \mathbf{z}; \mathbf{w}) - \Delta \ell_i(\mathbf{y})] d\mathbf{w} \geq -\xi_i, \forall i, \forall \mathbf{y}\}$$

- Step 2: keep $p(\mathbf{w})$ fixed, optimize over $p(\mathbf{z})$

$$\min_{p(\mathbf{z}), \xi} KL(p(\mathbf{z}) || p_0(\mathbf{z})) + C \xi_i$$

$$\text{s.t. } p(\mathbf{z}) \in \mathcal{F}^*_1, \xi_i \geq 0.$$

$$\mathcal{F}^*_1 = \{p(\mathbf{z}) : \sum_{\mathbf{z}} p(\mathbf{z}) \int p(\mathbf{w}) [\Delta F_i(\mathbf{y}, \mathbf{z}; \mathbf{w}) - \Delta \ell_i(\mathbf{y})] d\mathbf{w} \geq -\xi_i, \forall i, \forall \mathbf{y}\}$$

- Normal prior


- M³N problem (QP)

- Laplace prior

- Laplace M³N problem (VB)

Equivalently reduced to an LP with a polynomial number of constraints


Experimental Results



- Web data extraction:
 - *Name, Image, Price, Description*
 - Methods:
 - Hierarchical CRFs, Hierarchical M³N
 - PoMEN, Partially observed HCRFs









- Pages from 37 templates
 - Training: 185 (5/per template) pages, or 1585 data records
 - Testing: 370 (10/per template) pages, or 3391 data records
- Record-level Evaluation
 - Leaf nodes are labeled
- Page-level Evaluation
 - Supervision Level 1:
 - Leaf nodes and data record nodes are labeled
 - Supervision Level 2:
 - Level 1 + the nodes above data record nodes

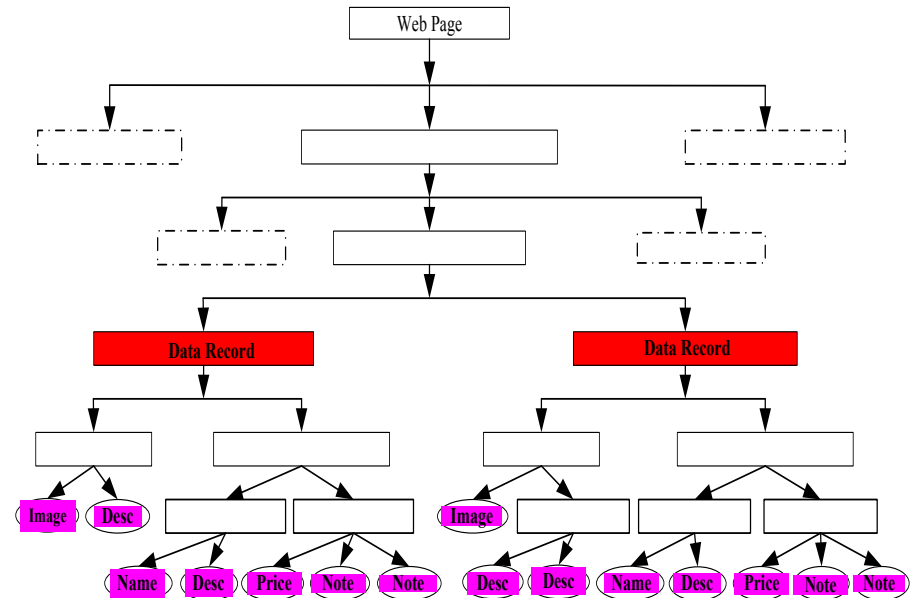



Record-Level Evaluations





- Overall performance:
 - Avg F1:
 - avg F1 over all attributes
 - Block instance accuracy:
 - % of records whose *Name*, *Image*, and *Price* are correct
- Attribute performance:

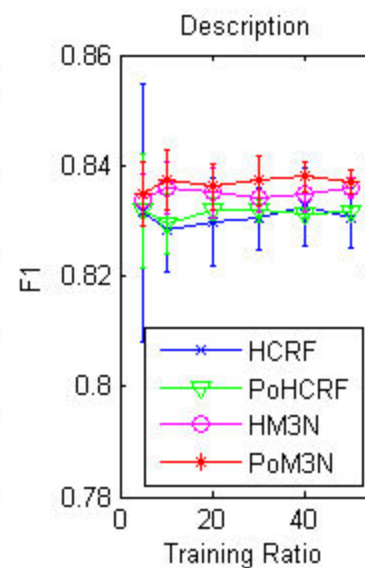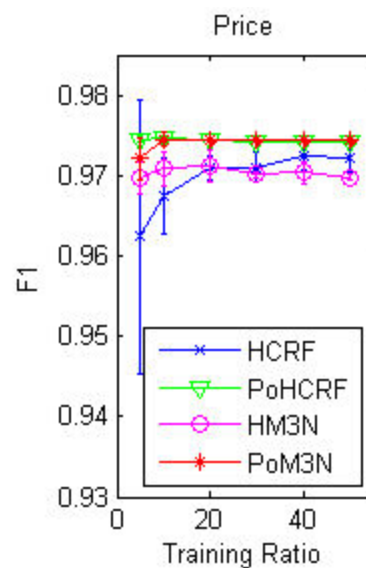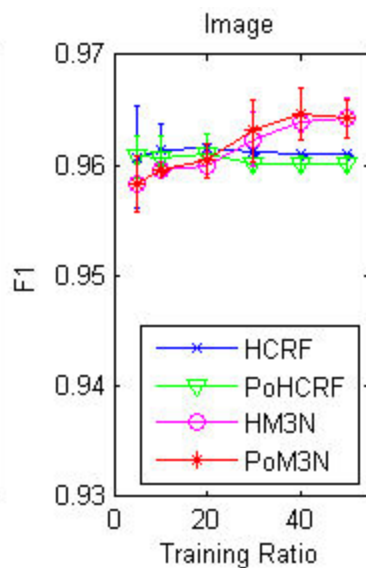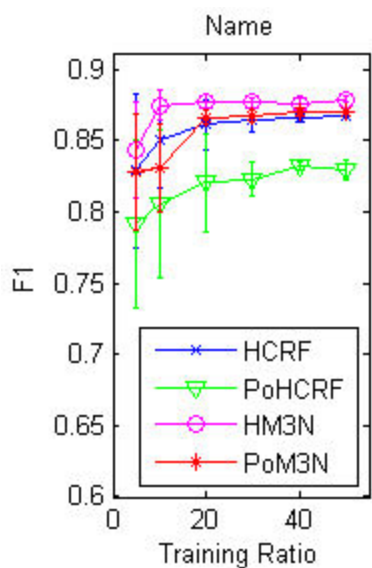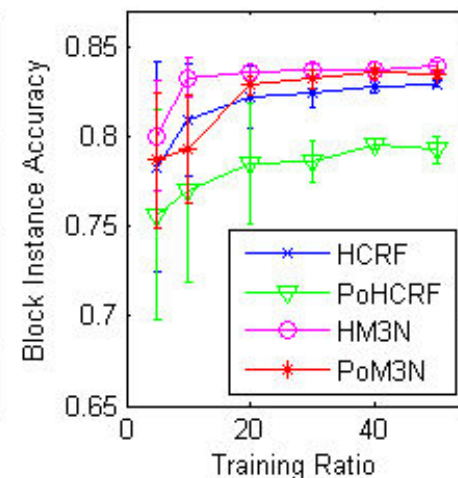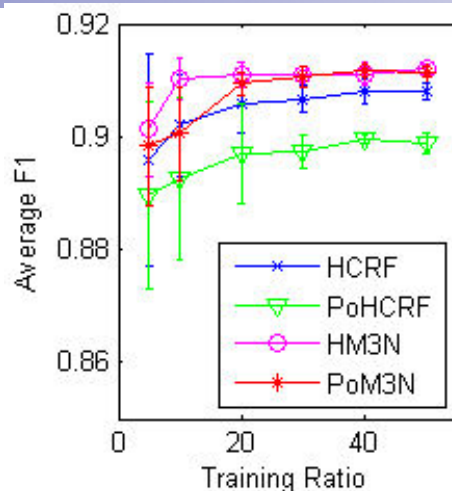


Page-Level Evaluations



- Supervision Level 1:
 - Leaf nodes and data record nodes are labeled
- Supervision Level 2:
 - Level 1 + the nodes above data record nodes

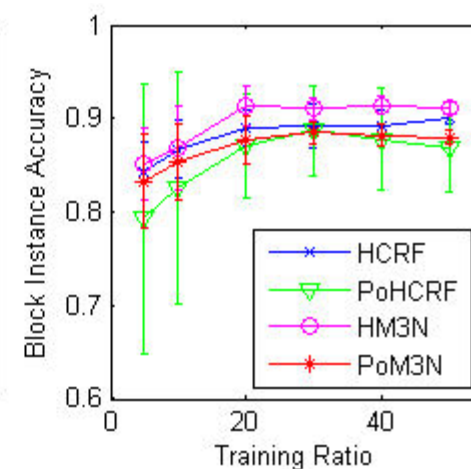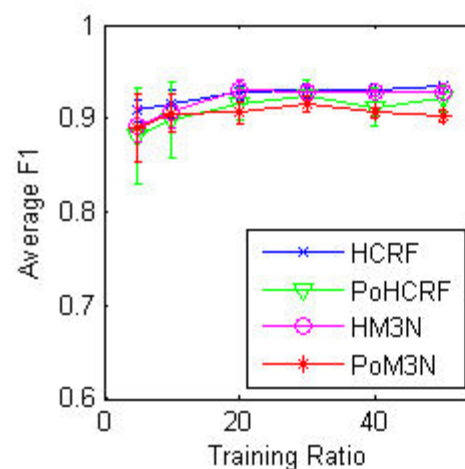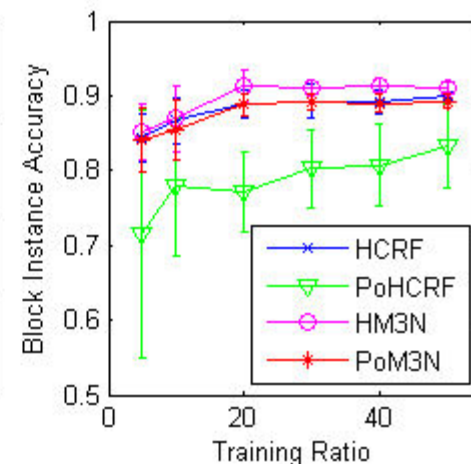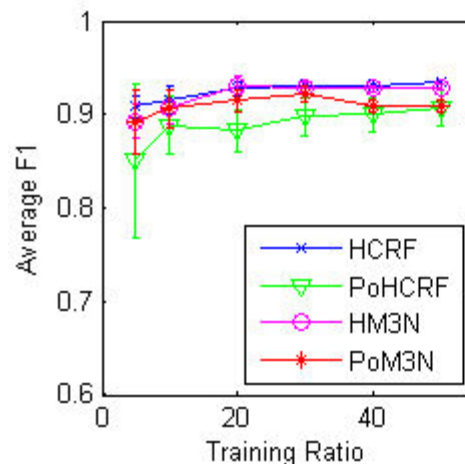



Key message from PoMEN

- Structured MaxEnt Discrimination (SMED):

$$\text{P1 : } \min_{p(\mathbf{w}, \mathbf{z}), \xi} \boxed{KL(p(\mathbf{w}, \mathbf{z}) || p_0(\mathbf{w}, \mathbf{z})) + U(\xi)}$$

, s.t. $p(\mathbf{w}, \mathbf{z}) \in \mathcal{F}_1, \xi_i \geq 0, \forall i.$

generalized maximum entropy or regularized KL-divergence

- Feasible subspace of weight distribution:


$$\mathcal{F} = \{p(\mathbf{w}, \mathbf{z}) : \boxed{\int \int p(\mathbf{w}, \mathbf{z}) [\Delta F_i(\mathbf{y}; \mathbf{w}, \mathbf{z}) - \Delta l_i(\mathbf{y})] d\mathbf{w} d\mathbf{z}} \geq -\xi_i, \forall i, \forall \mathbf{y} \neq \mathbf{y}^i\},$$

expected margin constraints.


- Average from distribution of PoMENs

$$h(\mathbf{x}) = \arg \max_{\mathbf{y} \in \mathcal{Y}(\mathbf{x})} \int \int p(\mathbf{w}, \mathbf{z}) F(\mathbf{x}, \mathbf{y}, \mathbf{z}; \mathbf{w}) d\mathbf{w} d\mathbf{z}$$


- **We can use this for any p and p_0 !**

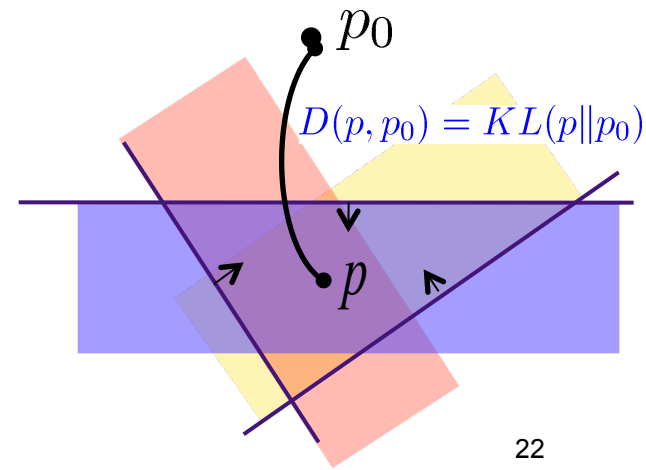

An all inclusive paradigm for learning general GM --- RegBayes

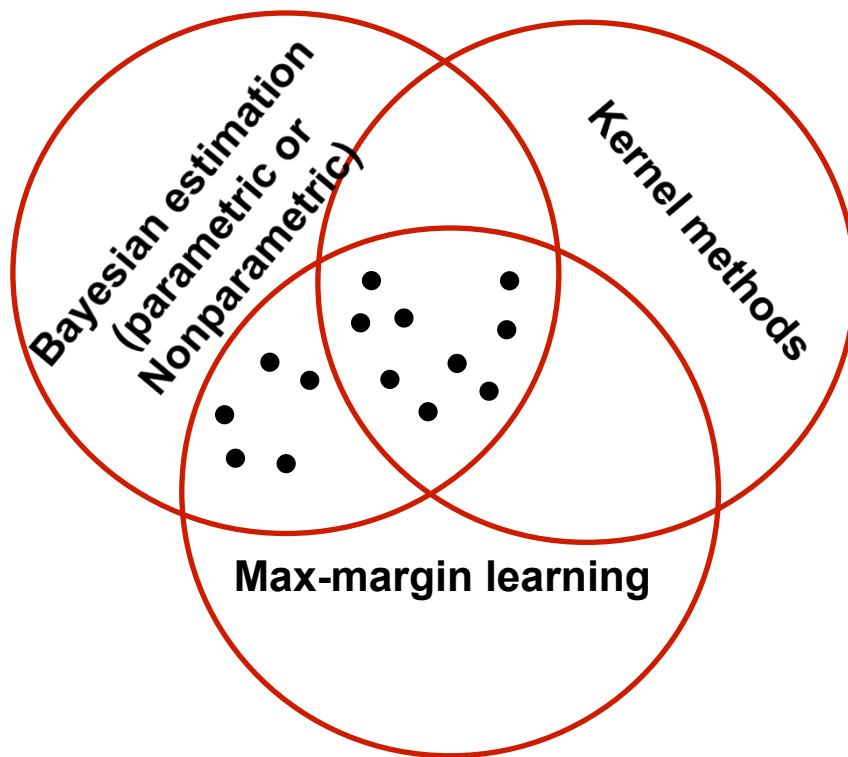

$$\begin{aligned} & \inf_{q(\mathbf{M}), \xi} \text{KL}(q(\mathbf{M}) \parallel \pi(\mathbf{M})) - \int_{\mathcal{M}} \log p(\mathcal{D} | \mathbf{M}) q(\mathbf{M}) d\mathbf{M} + U(\xi) \\ & \text{s.t. : } q(\mathbf{M}) \in \mathcal{P}_{\text{post}}(\xi), \end{aligned}$$



Predictive Latent Subspace Learning via a large-margin approach

... where M is any subspace model and p is a parametric Bayesian prior


Unsupervised Latent Subspace Discovery



- Finding latent subspace representations (an old topic)
 - Mapping a high-dimensional representation into a latent low-dimensional representation, where each dimension can have some interpretable meaning, e.g., a semantic topic

Examples:


- Topic models (aka LDA) [Blei et al 2003]

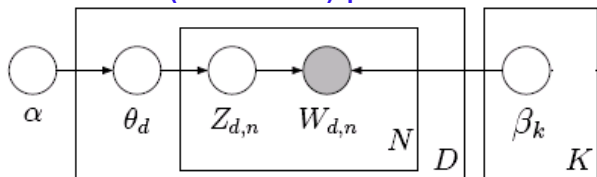


"Army"	"Eldorado"	"Children"	"In January"
NEW	MILITARY	CHILDREN	STRONG
FILM	TAX	WOMEN	STUDENTS
TOPIK	FINANCIAL	PROFIT	SCIENCE
WIFE	RESEARCH	OFFER	PROCESSES
MUSIC	DELIVER	CELLS	RESEARCHERS
PLAY	FEDERAL	WALLS	TECHNIQUES
MENTAL	TRIAL	PROBE	FORUM
BOYS	SPENDING	PARADES	CHANGES
ACTION	NEW	DATA	MONITOR
FORMS	SPACE	FAMILY	HANDOFF
WIRE	A-1	WARRANT	WILLIAM
OPERA	MONEY	MEMO	STATE
TRUCKER	PROGRAMS	PRESENT	RESEARCH
ADVERTISE	GOVERNMENT	CARE	REARMENT
GOVERN	CONGRESS	LEFT	SMITH

The White House's Strategic Initiative will give \$10 million to the United States...
 Metropolitan Opera Co., New York, Philadelphia, and Dallas. "The Great...
 like, one which is not appropriate, in order to work on the issue of the performance...
 and which are given as an example to the audience...
 to health, medical research, research, and the world's...
 Princeton University, in the past...
 about will be \$10,000 for the new building, which will have strong...
 new public facility. The Metropolitan Opera Co. and New York...
 \$400,000 each. The building...
 will get \$400,000. The...
 Dr. Charles...
 Dr. Charles...
 Dr. Charles...



- Total scene latent space models [Li et al 2009]

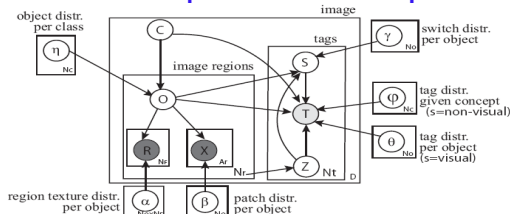

Athlete
Horse
Grass
Trees
Sky
Saddle



- Multi-view latent Markov models [Xing et al 2005]

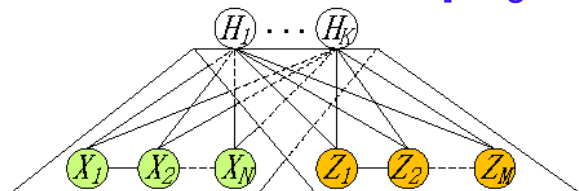

T ₁	storms gulf hawaii low forecast southeast showers
T ₂	rebounds 14 shouting tests guard cut hawks
T ₃	engine flying craft asteroid say hour aerodynamic
T ₄	old cross red stars dry providing services
T ₅	boeing poney sixth antenna david york enhance

- PCA, CCA, ...

Predictive Subspace Learning with Supervision




- Unsupervised latent subspace representations are generic but can be sub-optimal for predictions
- Many datasets are available with supervised side information

- **Tripadvisor Hotel Review**
(<http://www.tripadvisor.com>)

“Lovely welcoming staff, good rooms that give a good nights sleep, downtown location”
Meramees Hostel
SheikhSahib 10 contributions
London
Jul 7, 2009 | Trip type: Friends getaway
This hotel is just of the side streets of Talat Harb, one of the main arteries to downtown Cairo. It is walking distance to the Nile, riverfront hotels, Egyptian Museum, and there are many eateries in the area at night when it is still bustling. Only a short cab ride away from the Old Fatimid Cairo.
The staff are young and very friendly and able to sort out things like mobile chargers, internet, and they have skype installed on their computers which is brilliant. The rooms are nicer than the Luna (nearby) and much quieter as well.
My ratings for this hotel
Value Service
Rooms
Location
Cleanliness
Date of stay February 2009
Visit was for Leisure
Traveled with With Friends
Member since July 03, 2009
Would you recommend this hotel to a friend? Yes

- **LabelMe**
(<http://labelme.csail.mit.edu/>)

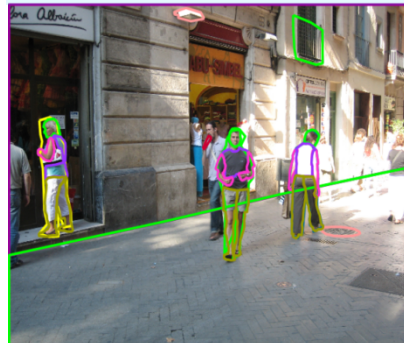


woman entering shop
man walking towards camera
balcony rail
building
sidewalk
manhole
light
person woman walking
ice cream
head
arm
torso

- Many others


Flickr (<http://www.flickr.com/>)
IMAGENET

- Can be noisy, but not random noise (Ames & Naaman, 2007)
 - labels & rating scores are usually assigned based on some intrinsic property of the data
 - helpful to suppress noise and capture the most useful aspects of the data
- **Goals:**
 - Discover latent subspace representations that are both *predictive* and *interpretable* by exploring weak supervision information



I. LDA: Latent Dirichlet Allocation

(Blei et al., 2003)

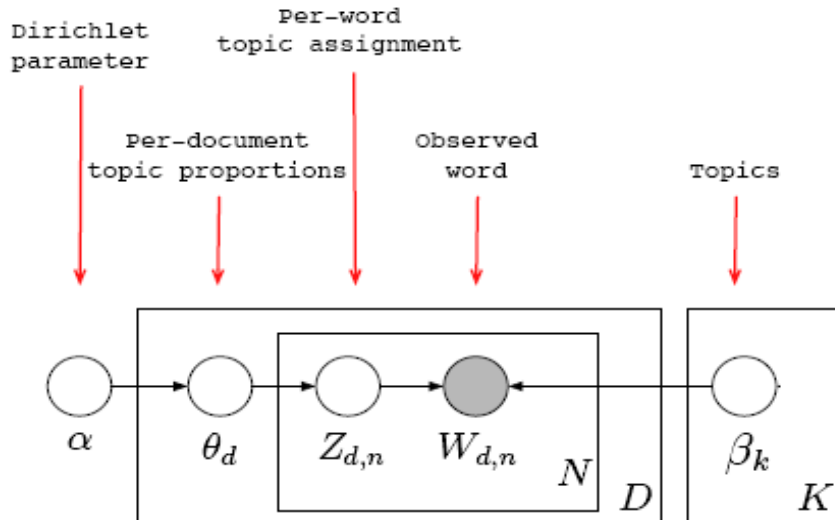

- **Generative Procedure:**
 - **For each document d :**
 - **Sample a topic proportion** $\theta_d \sim \text{Dir}(\alpha)$
 - **For each word:**
 - **Sample a topic** $Z_{d,n} \sim \text{Mult}(\theta_d)$
 - **Sample a word** $W_{d,n} \sim \text{Mult}(\beta_{z_{d,n}})$

- Joint Distribution:
$$p(\theta, \mathbf{z}, \mathbf{W} | \alpha, \beta) = \prod_{d=1}^D p(\theta_d | \alpha) \left(\prod_{n=1}^N p(z_{dn} | \theta_d) p(w_{dn} | z_{dn}, \beta) \right)$$

exact inference intractable!


- Variational Inference with $q(\mathbf{z}, \theta) \sim p(\mathbf{z}, \theta | \mathbf{W}, \alpha, \beta)$

$$\mathcal{L}(q) \triangleq -E_q[\log p(\theta, \mathbf{z}, \mathbf{W} | \alpha, \beta)] - \mathcal{H}(q(\mathbf{z}, \theta)) \geq -\log p(\mathbf{W} | \alpha, \beta)$$


- Minimize the variational bound to estimate parameters and infer the posterior distribution

Maximum Entropy Discrimination LDA (MedLDA)

(Zhu et al, ICML 2009)



- Bayesian sLDA:

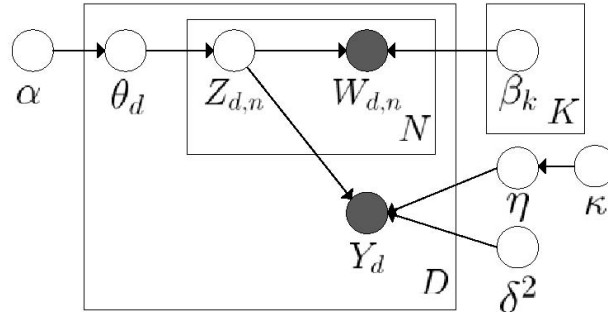

- MED Estimation:

- MedLDA Regression Model

$$P1(\text{MedLDA}^r) : \min_{q, \alpha, \beta, \delta^2, \xi, \xi^*} \mathcal{L}(q) + C \sum_{d=1}^D (\xi_d + \xi_d^*)$$

$$\text{s.t. } \forall d : \begin{cases} y_d - E[\eta^\top \bar{Z}_d] \leq \epsilon + \xi_d, \mu_d \\ -y_d + E[\eta^\top \bar{Z}_d] \leq \epsilon + \xi_d^*, \mu_d^* \\ \xi_d \geq 0, v_d \\ \xi_d^* \geq 0, v_d^* \end{cases}$$

model fitting


predictive accuracy

- MedLDA Classification Model


$$P2(\text{MedLDA}^c) : \min_{q, q(\eta), \alpha, \beta, \xi} \mathcal{L}(q) + C \sum_{d=1}^D \xi_d$$

$$\text{s.t. } \forall d, y \neq y_d : E[\eta^\top \Delta \mathbf{f}_d(y)] \geq 1 - \xi_d; \xi_d \geq 0.$$


Document Modeling




- Data Set: 20 Newsgroups
- 110 topics + 2D embedding with t-SNE (van der Maaten & Hinton, 2008)

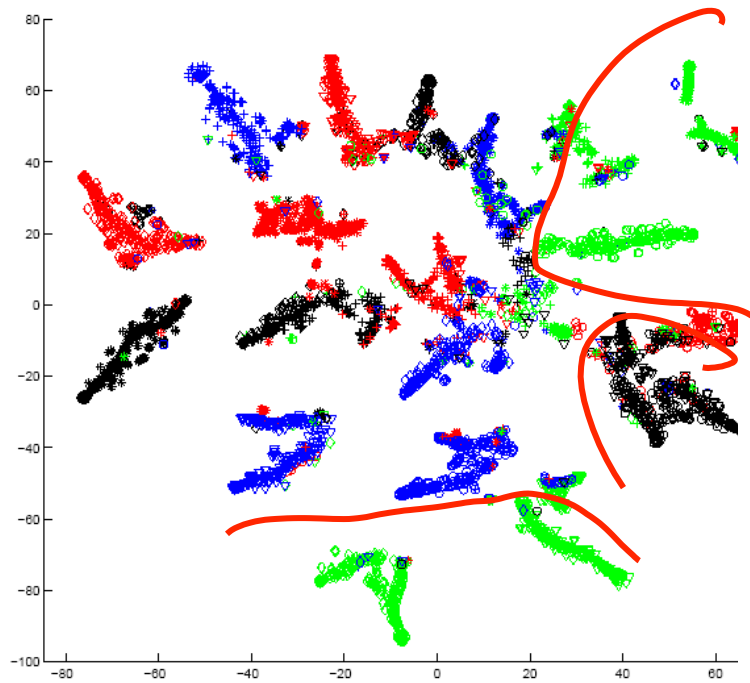

MedLDA

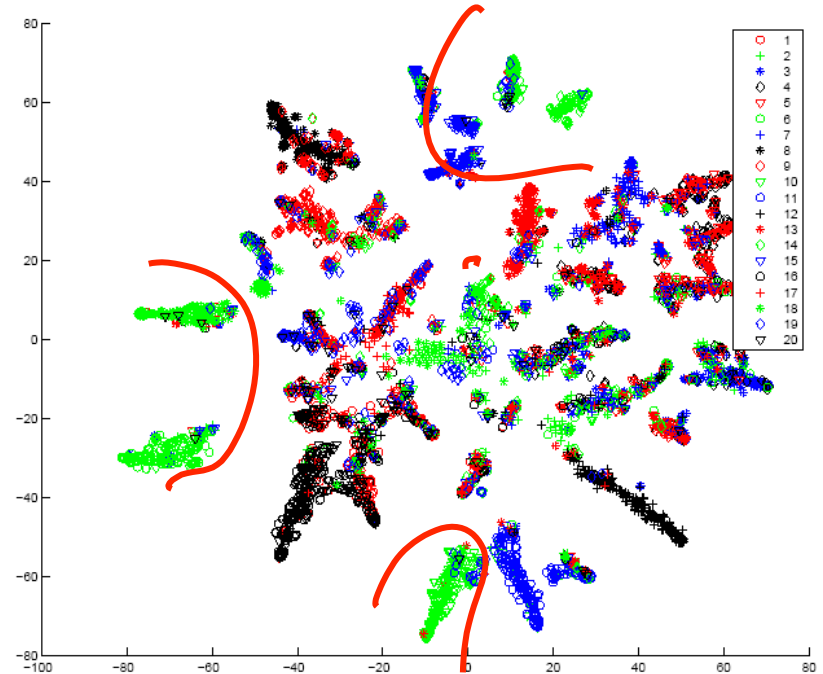



LDA




Classification

- **Data Set:** 20Newsgroups
 - Binary classification: “alt.atheism” and “talk.religion.misc” (Simon et al., 2008)
 - Multiclass Classification: all the 20 categories
- **Models:** DiscLDA, sLDA (**Binary ONLY! Classification sLDA (Wang et al., 2009)**), LDA+SVM (baseline), MedLDA, MedLDA+SVM
- **Measure:** Relative Improvement Ratio

$$RR(\mathcal{M}) = \frac{\text{precision}(\mathcal{M})}{\text{precision}(LDA + SVM)} - 1$$

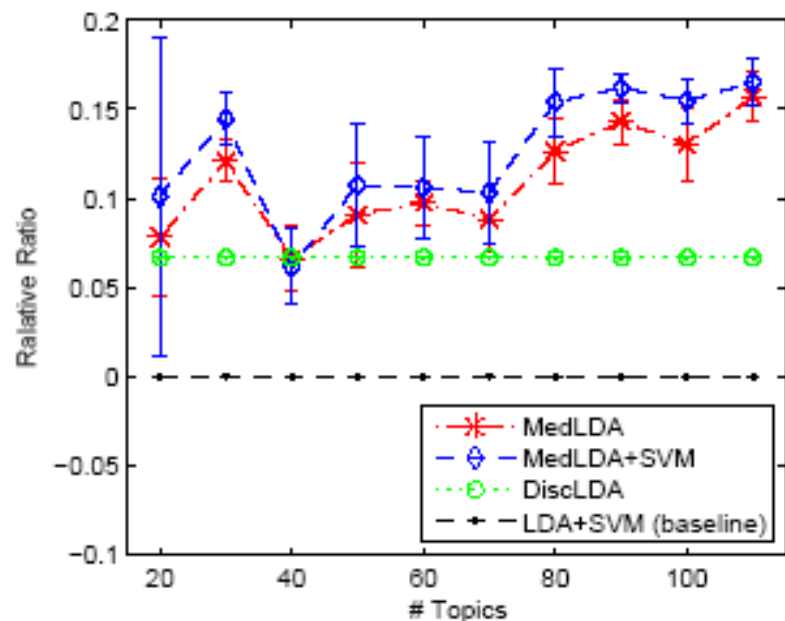
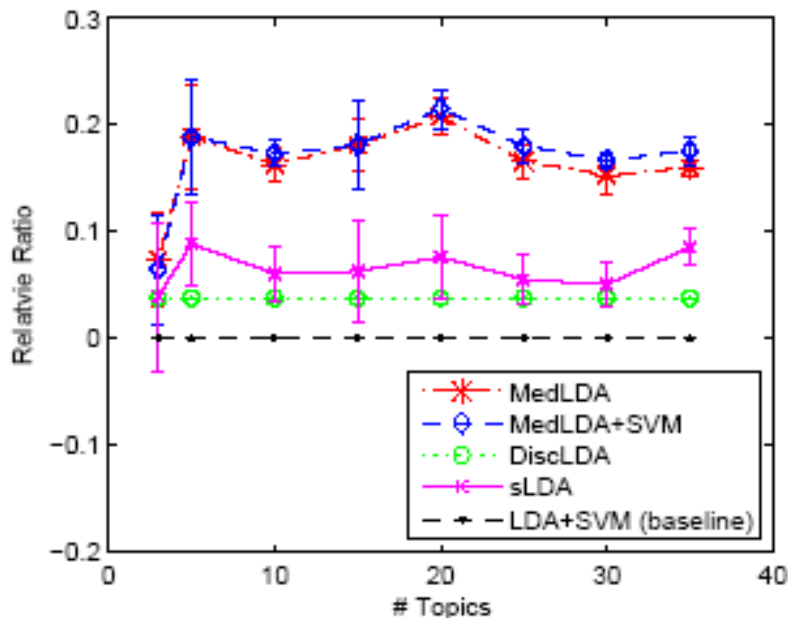





Regression

- **Data Set:** Movie Review (Blei & McAuliffe, 2007)
- **Models:** MedLDA(*partial*), MedLDA(*full*), sLDA, LDA+SVR
- **Measure:** predictive R^2 and per-word log-likelihood


$$pR^2 = 1 - \frac{\sum_d (y_d - \hat{y}_d)^2}{\sum_d (y_d - \bar{y}_d)^2}$$

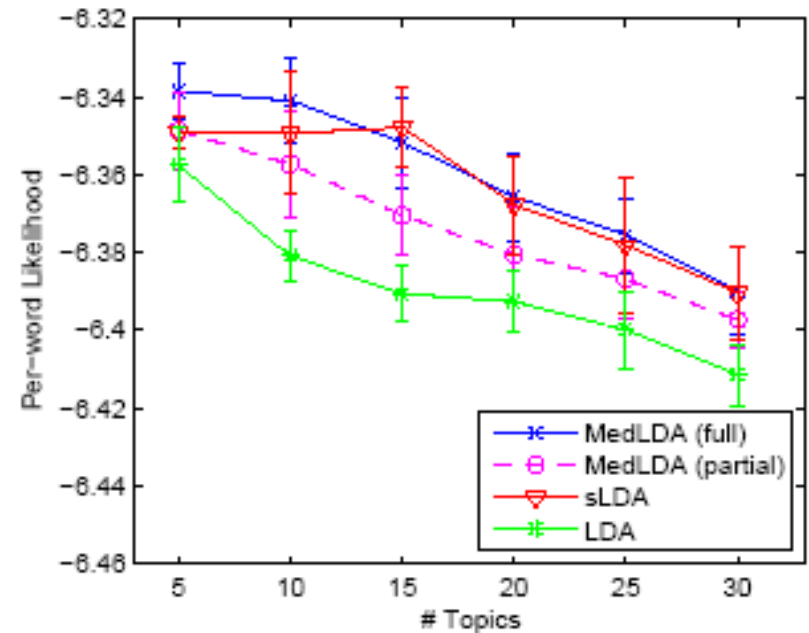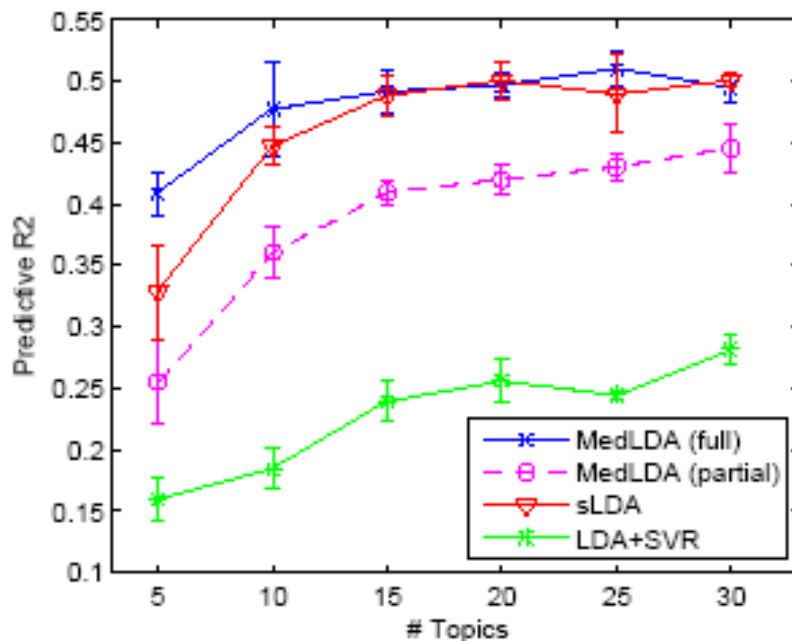




Time Efficiency

- Binary Classification


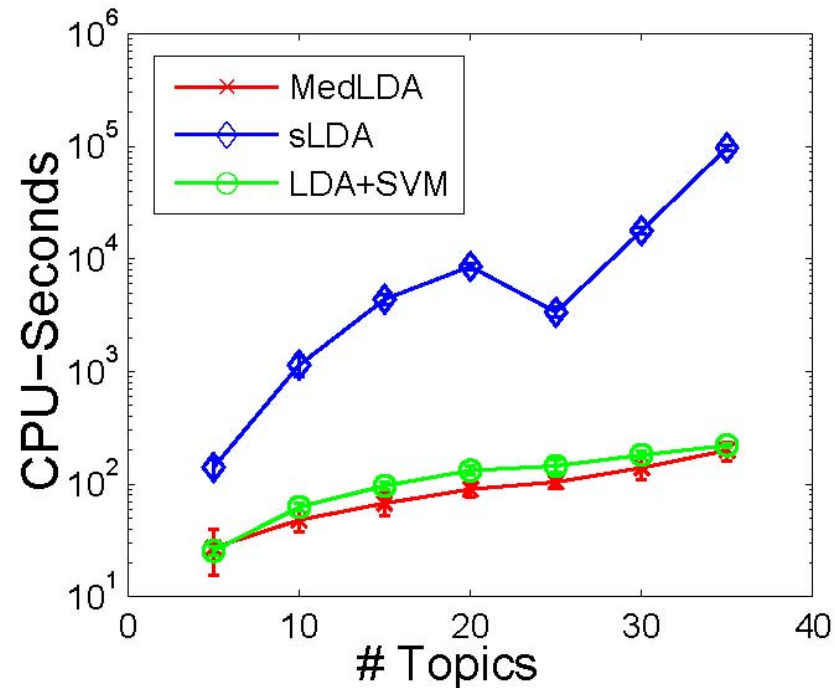


- Multiclass:
 - MedLDA is comparable with LDA+SVM
- Regression:
 - MedLDA is comparable with sLDA

II. Upstream Scene Understanding Models



- The “Total Scene Understanding” Model (Li et al, CVPR 2009)

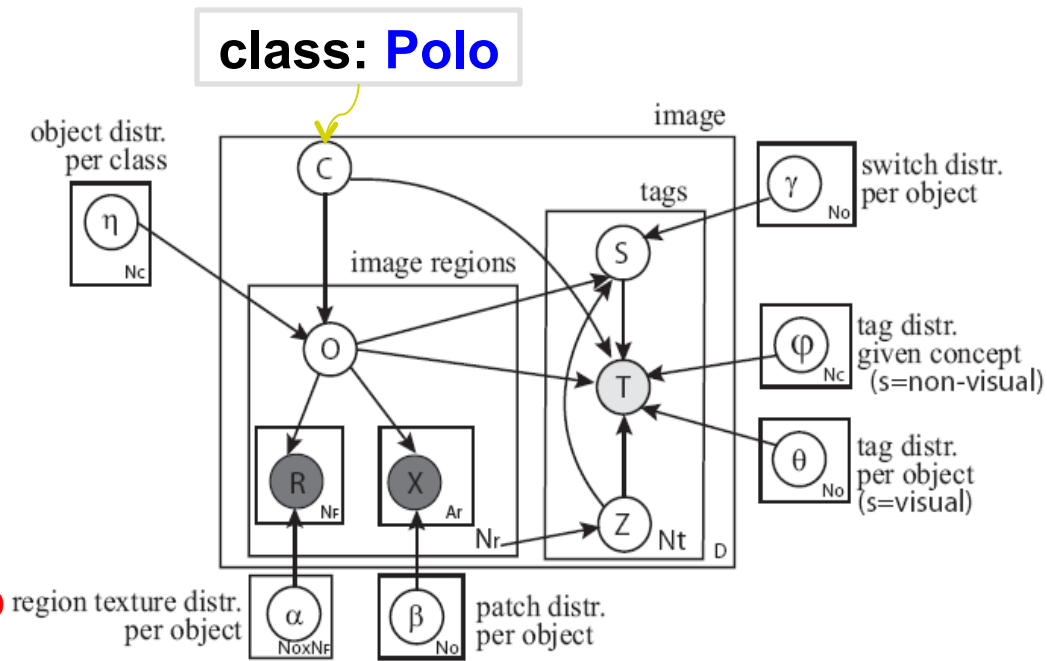


**Athlete
Horse
Grass
Trees
Sky
Saddle**



Scene Classification

- 8-category sports data set (Li & Fei-Fei, 2007):

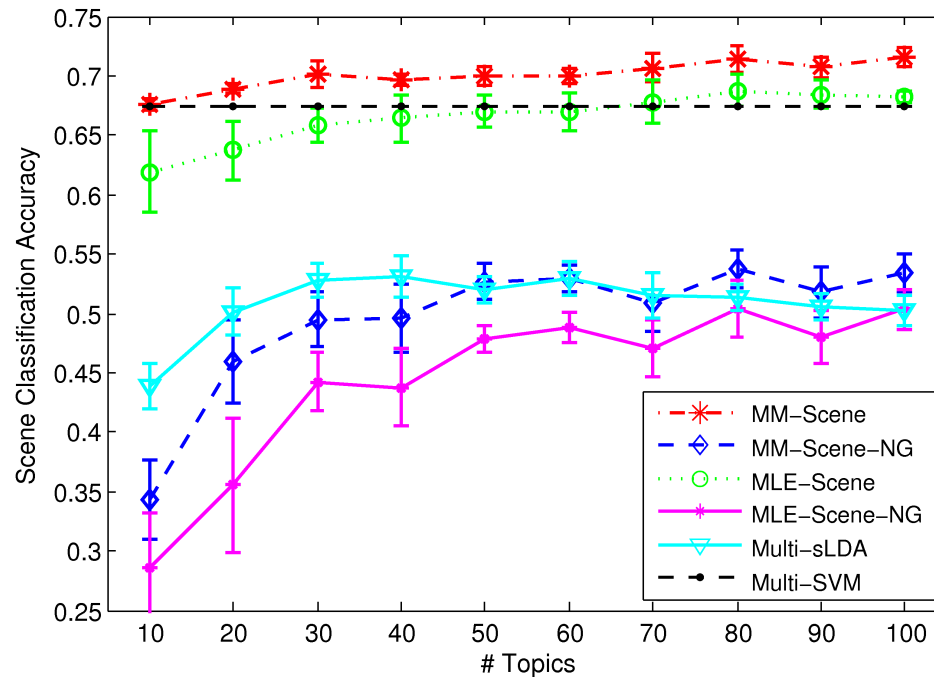

- Fei-Fei's theme model: 0.65 (different image representation)
- SVM: 0.673


- 1574 images (50/50 split)
- Pre-segment each image into regions
- Region features:
 - color, texture, and location
 - patches with SIFT features
- Global features:
 - Gist (Oliva & Torralba, 2001)
 - Sparse SIFT codes (Yang et al, 2009)

MIT Indoor Scene



- Classification results:

- 67-category MIT indoor scene (Quattoni & Torralba, 2009):
 - ~80 per-category for training; ~20 per-category for testing
 - Same feature representation as above
 - Gist global features

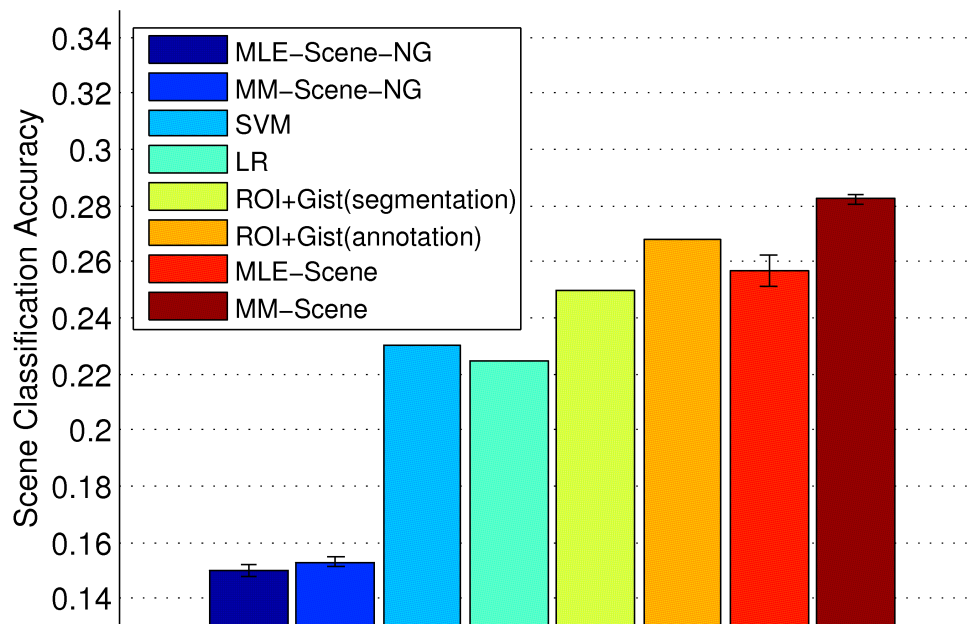

§ROI+Gist(annotation) used *human annotated* interest regions.




III. Supervised Multi-view RBMs

- A probabilistic method with an additional view of response variables Y


$$p(y|\mathbf{h}) = \frac{\exp\{\mathbf{V}^\top \mathbf{f}(\mathbf{h}, y)\}}{Z(\mathbf{V}, \mathbf{h})}$$

normalization factor


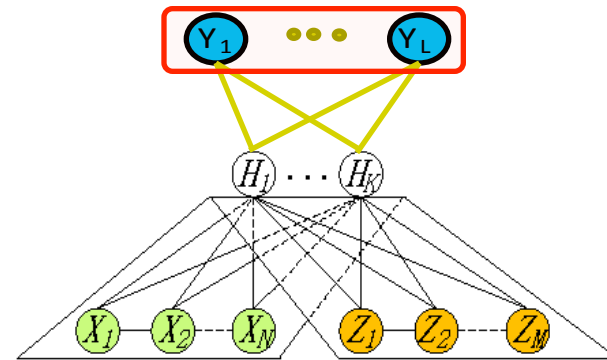


- Parameters can be learned with maximum likelihood estimation, e.g., special supervised Harmonium (Yang et al., 2007)
 - contrastive divergence is the commonly used approximation method in learning undirected latent variable models (Welling et al., 2004; Salakhutdinov & Murray, 2008).


Predictive Latent Representation



- t-SNE (van der Maaten & Hinton, 2008) 2D embedding of the discovered latent space representation on the TRECVID 2003 data

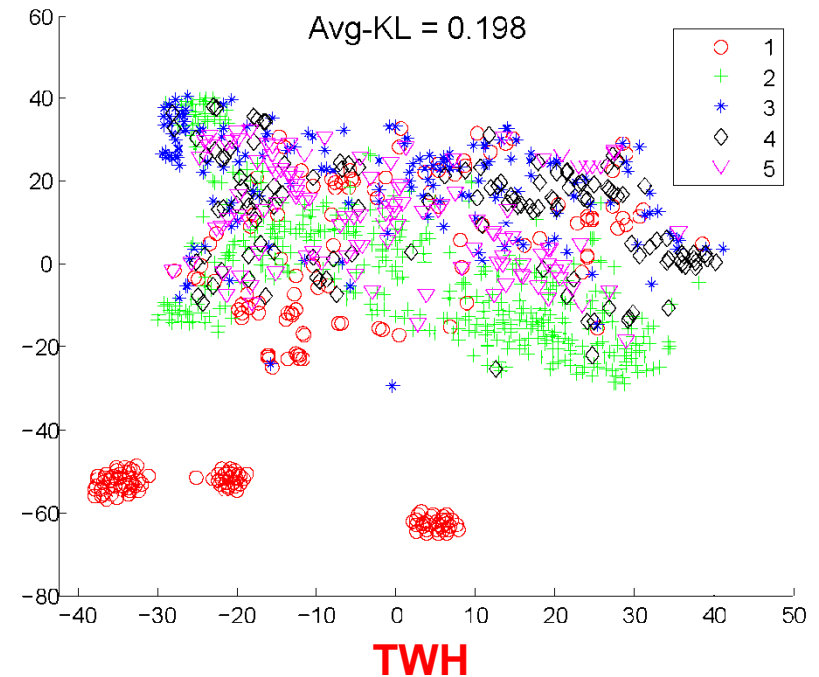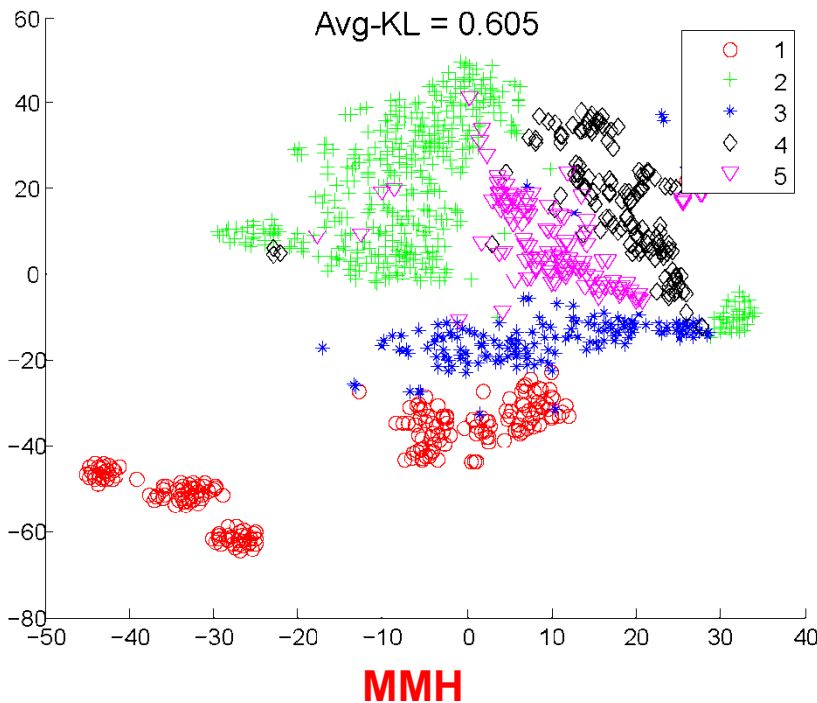



- Avg-KL: average pair-wise divergence



Predictive Latent Representation

- Example latent topics discovered by a 60-topic MMH on Flickr Animal Data

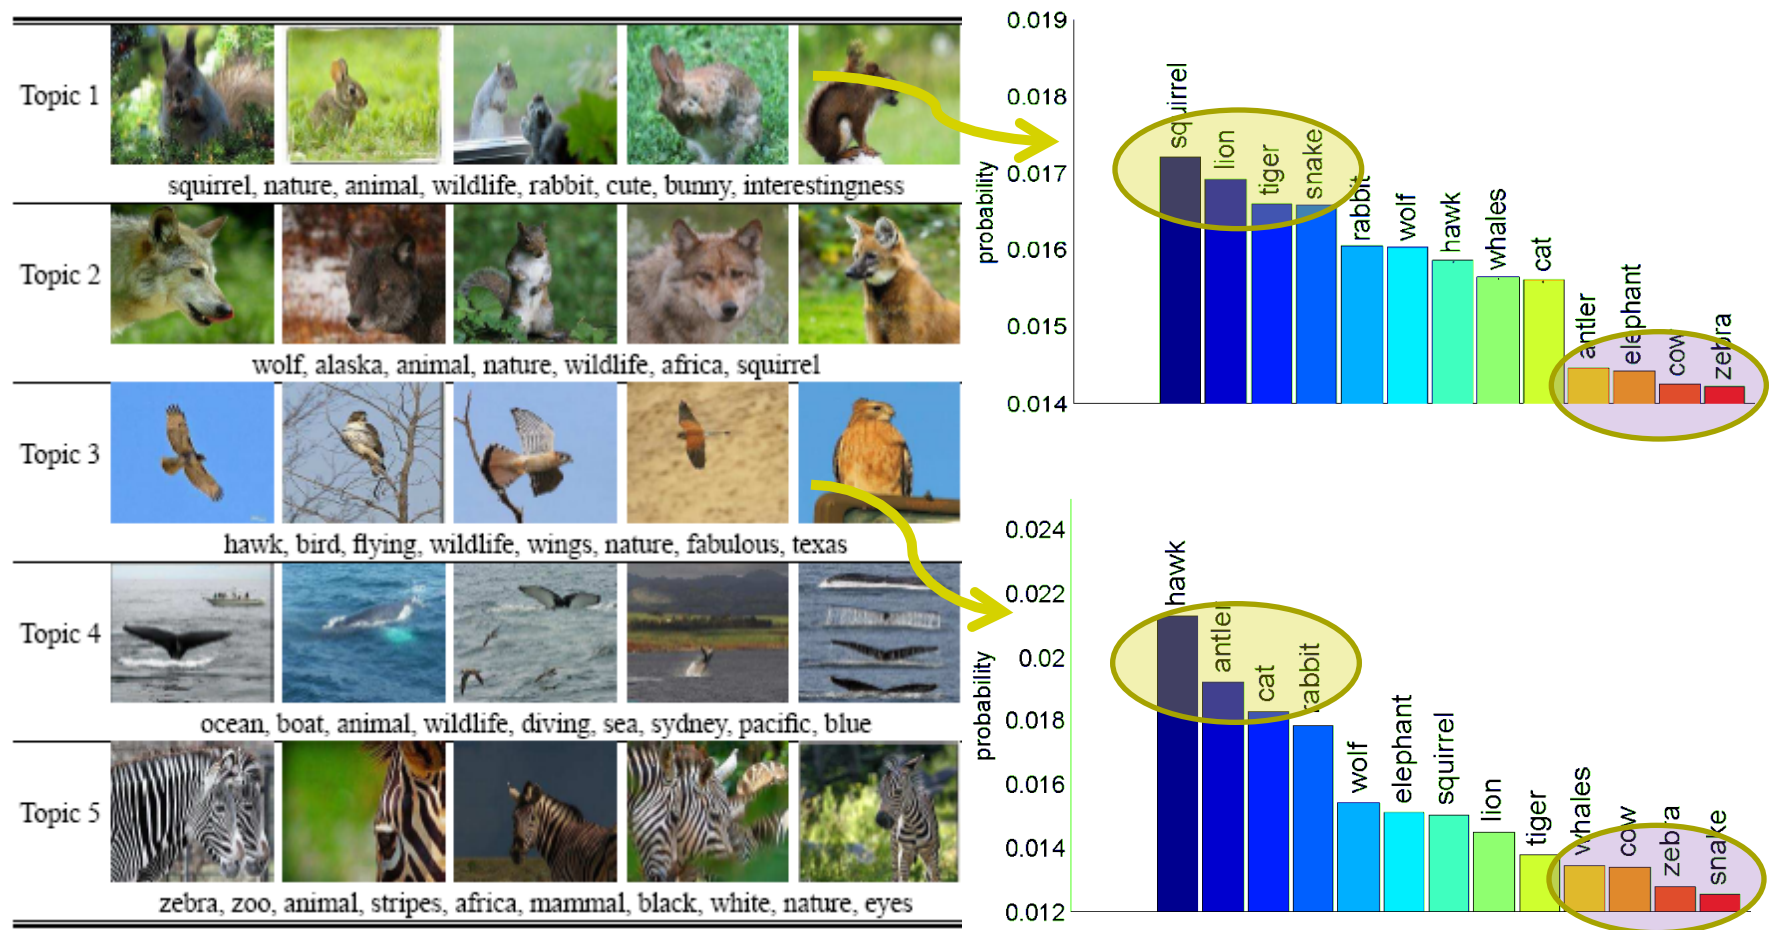





Classification Results


- **Data Sets:**

- (Left) TRECVID 2003: (text + image features)
- (Right) Flickr 13 Animal: (sift + image features)

- **Models:**


- baseline(SVM), DWH+SVM, GM-Mixture+SVM, GM-LDA+SVM, TWH, MedLDA(sift only), MMH

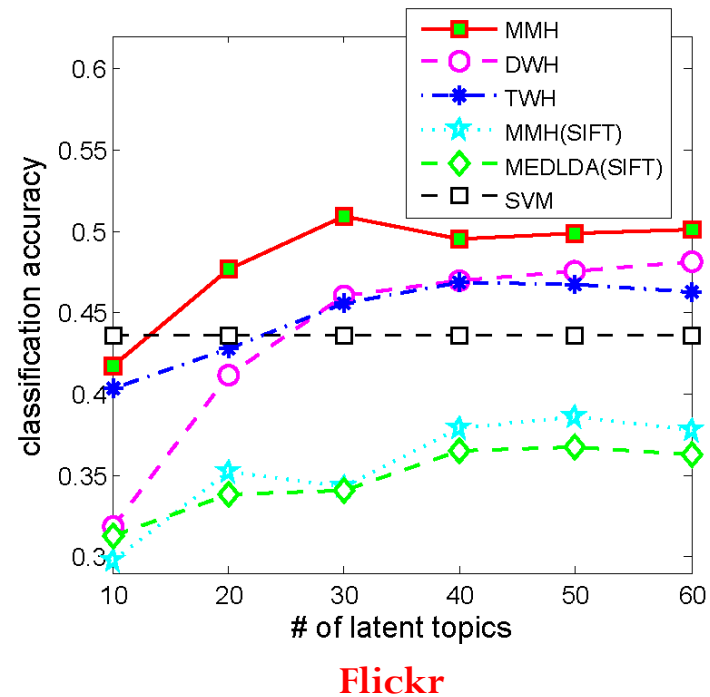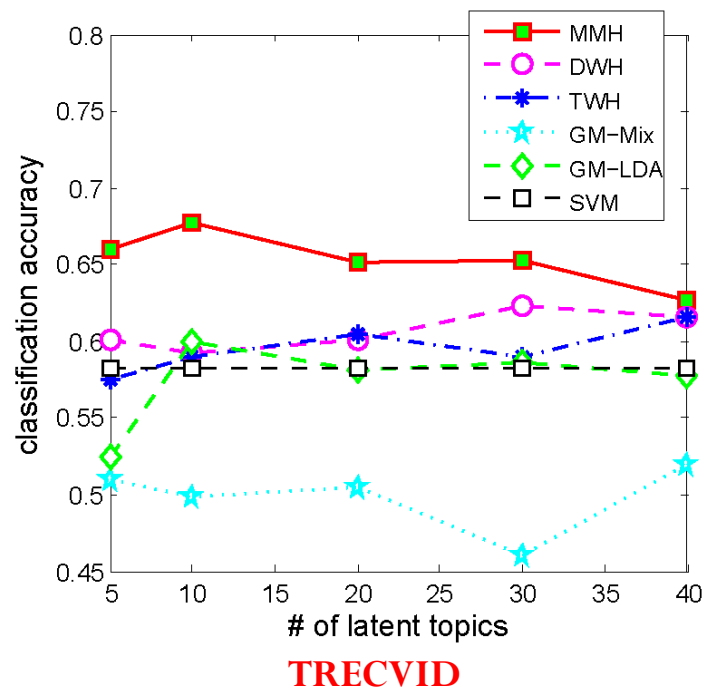




Retrieval Results

- **Data Set: TRECVID 2003**
 - Each test sample is treated as a query, training samples are ranked based on the cosine similarity between a training sample and the given query
 - Similarity is computed based on the discovered latent topic representations
- **Models:** DWH, GM-Mixture, GM-LDA, TWH, MMH
- **Measure:** (Left) average precision on different topics and (Right) precision-recall curve

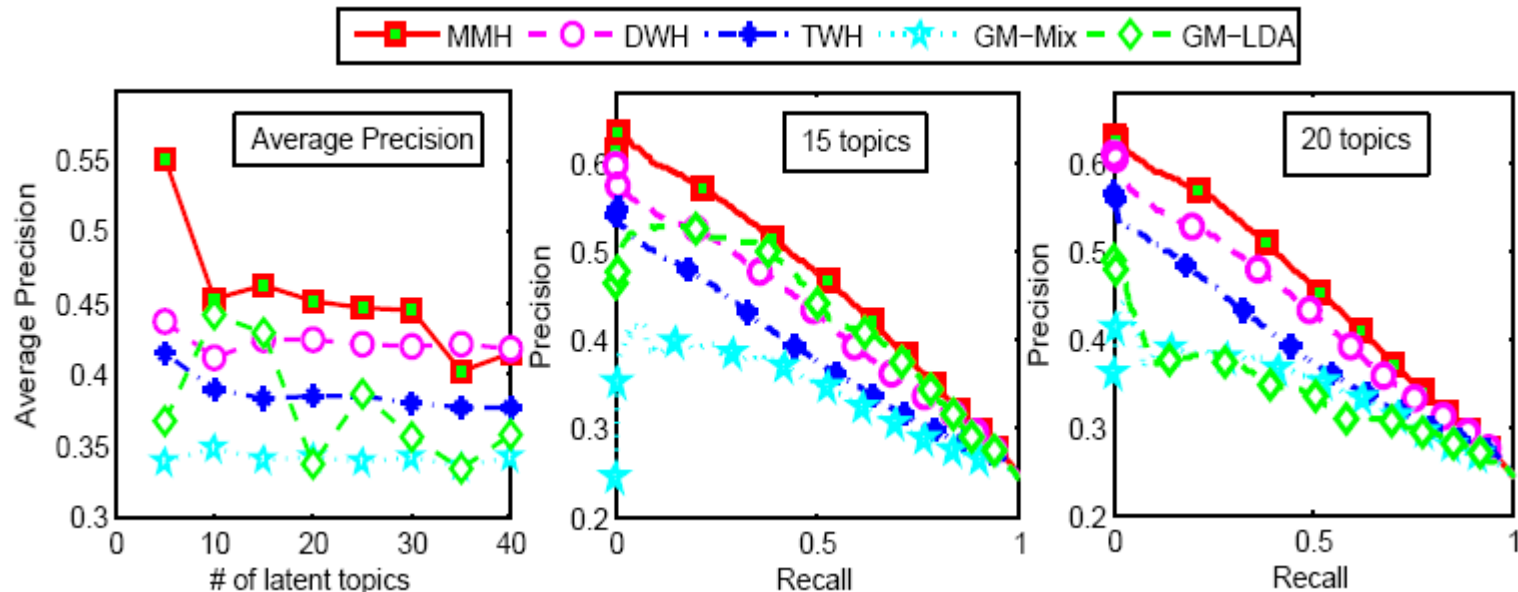




Infinite SVM and infinite latent SVM:

-- where SVMs meet NB for classification and feature selection


... where M is any combinations of classifiers and p is a nonparametric Bayesian prior




Mixture of SVMs

- Dirichlet process mixture of large-margin kernel machines
- Learn flexible non-linear local classifiers; potentially lead to a better control on model complexity, e.g., few unnecessary components


SVM using RBF kernel

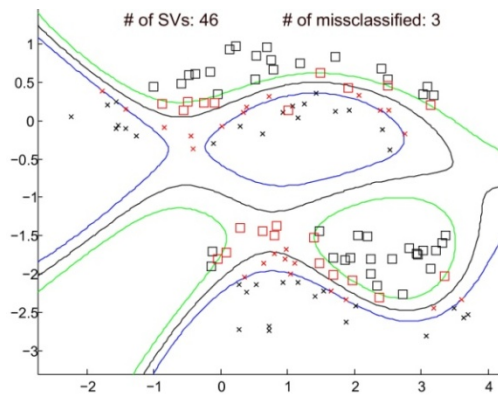


Mixture of 2 linear SVM

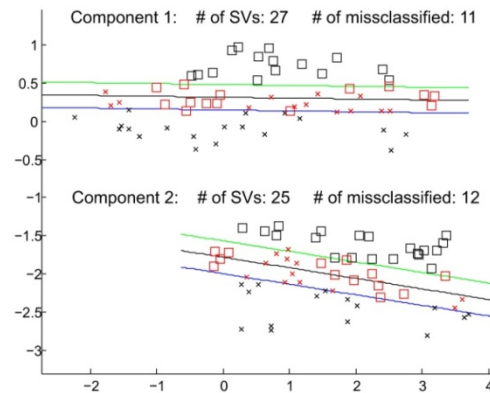

Mixture of 2 RBF-SVM

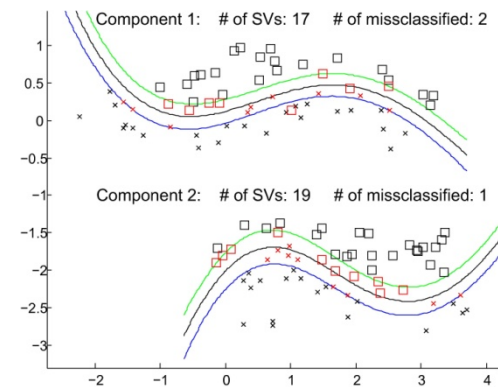

- The first attempt to integrate Bayesian nonparametrics, large-margin learning, and kernel methods



Infinite SVM

- RegBayes framework:

$$\min_{p(\mathcal{M}), \xi} \text{KL}(p(\mathcal{M}) \parallel \pi(\mathcal{M})) - \sum_{n=1}^N \int \log p(\mathbf{x}_n | \mathcal{M}) p(\mathcal{M}) d\mathcal{M} + U(\xi)$$


s.t. : $p(\mathcal{M}) \in \mathcal{P}_{\text{post}}(\xi),$

convex function

direct and rich constraints on posterior distribution

- Model – latent class model
- Prior – Dirichlet process
- Likelihood – Gaussian likelihood
- Posterior constraints – max-margin constraints

Infinite SVM



- DP mixture of large-margin classifiers

process of determining which classifier to use:

- draw $V_i | \alpha \sim \text{Beta}(1, \alpha)$, $i \in \{1, 2, \dots\}$.
- draw $\eta_i | G_0 \sim G_0$, $i \in \{1, 2, \dots\}$.
- for the d th data point:

(a) draw $Z_d | \{v_1, v_2, \dots\} \sim \text{Mult}(\pi(\mathbf{v}))$

- Given a component classifier:

$$F(y, \mathbf{x}; z, \eta) = \eta_z^\top \mathbf{f}(y, \mathbf{x}) = \sum_{i=1}^{\infty} \delta_{z,i} \eta_i^\top \mathbf{f}(y, \mathbf{x})$$


- Overall discriminant function:

$$F(y, \mathbf{x}) = \mathbb{E}_{q(z, \eta)} [F(y, \mathbf{x}; z, \eta)] = \sum_{i=1}^{\infty} q(z = i) \mathbb{E}_q[\eta_i]^\top \mathbf{f}(y, \mathbf{x})$$

- Prediction rule: $y^* = \arg \max_y F(y, \mathbf{x})$

- Learning problem: $\min_{q(\mathbf{z}, \eta)} \text{KL}(q(\mathbf{z}, \eta) \| p_0(\mathbf{z}, \eta)) + C_1 \mathcal{R}(q(\mathbf{z}, \eta))$,

$$\mathcal{R}(q(\mathbf{z}, \eta)) = \sum_d \max_y (\ell_d^\Delta(y) + F(y, \mathbf{x}_d) - F(y_d, \mathbf{x}_d))$$

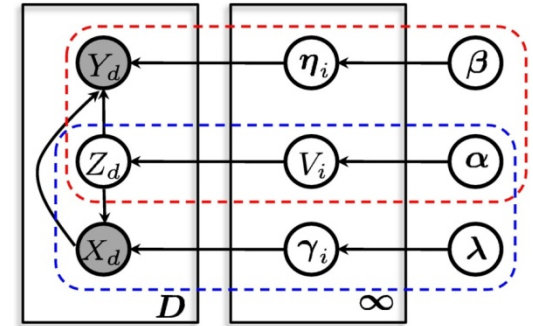

Graphical model with stick-breaking construction of DP

Infinite SVM



- Assumption and relaxation

- Truncated variational distribution

$$q(\mathbf{z}, \boldsymbol{\eta}, \boldsymbol{\gamma}, \mathbf{v}) = \prod_{d=1}^D q(z_d) \prod_{t=1}^T q(\eta_t) \prod_{t=1}^T q(\gamma_t) \prod_{t=1}^{T-1} q(v_t)$$


- Upper bound the KL-regularizer

- Opt. with coordinate descent

- For $q(\boldsymbol{\eta})$, we solve an SVM learning problem
- For $q(\mathbf{z})$, we get the closed update rule


$$q(z_d = t) \propto \exp \left\{ (\mathbb{E}[\log v_t] + \sum_{i=1}^{t-1} \mathbb{E}[\log(1-v_i)]) + \rho(\mathbb{E}[\gamma_t]^\top \mathbf{x}_d - \mathbb{E}[A(\gamma_t)]) + (1-\rho) \sum_y \omega_d^y \mu_t^\top \mathbf{f}_d^\Delta(y) \right\}$$

- The last term regularizes the mixing proportions to favor prediction
- For $q(\boldsymbol{\gamma}), q(\mathbf{v})$, the same update rules as in (Blei & Jordan, 2006)

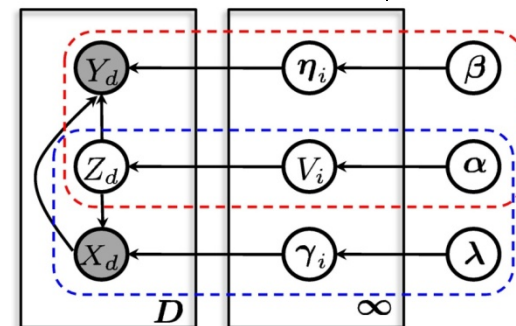

Graphical model with stick-breaking construction of DP

Experiments on high-dim real data



- Classification results and test time:


Table 4. Classification accuracy (%), F1 score (%), and test time (sec) for different models on the Flickr image dataset. All methods except dpMNL are implemented in C.


	ACCURACY	F1 SCORE	TEST TIME
MNL	49.8 \pm 0.0	48.4 \pm 0.0	0.02 \pm 0.00
MMH	51.7 \pm 0.0	50.1 \pm 0.0	0.33 \pm 0.01
RBF-SVM	52.2 \pm 0.0	48.4 \pm 0.0	7.58 \pm 0.06
DPMNL-EFH70	51.2 \pm 0.9	49.9 \pm 0.8	42.1 \pm 7.39
DPMNL-PCA50	51.9 \pm 0.7	49.9 \pm 0.8	27.4 \pm 2.08
LINEAR-ISVM	53.2 \pm 0.4	51.3 \pm 0.4	0.22 \pm 0.01
RBF-ISVM	54.2 \pm 0.5	51.6 \pm 0.7	6.67 \pm 0.05

For training, linear-iSVM is very efficient (~200s); RBF-iSVM is much slower, but can be significantly improved using efficient kernel methods (Rahimi & Recht, 2007; Fine & Scheinberg, 2001)

- Clusters:

- similar background images group
- a cluster has fewer categories

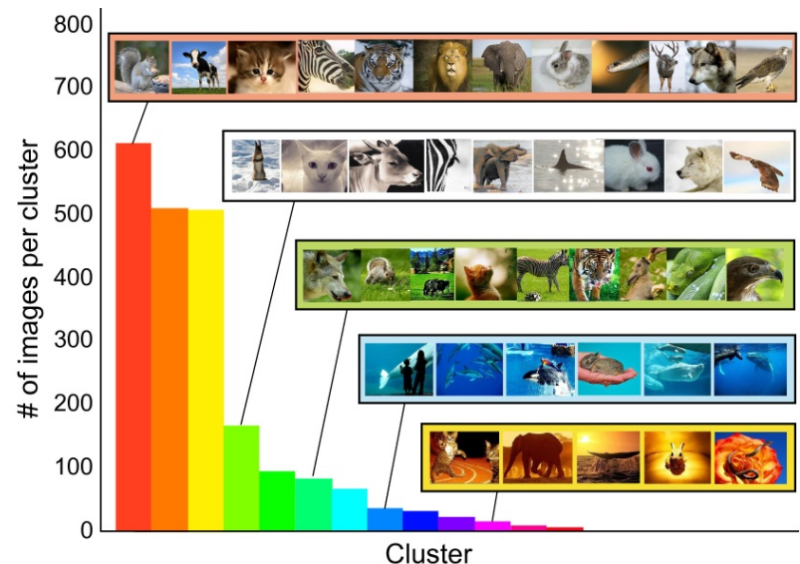




Learning Latent Features

- Infinite SVM is a Bayesian nonparametric **latent class** model
 - discover clustering structures
 - each data point is assigned to a **single** cluster/class

- Infinite Latent SVM is a Bayesian nonparametric **latent feature/factor** model
 - discover latent factors
 - each data point is mapped to a **set (can be infinite)** of latent factors

- Latent factor analysis is a key technique in many fields; Popular models are FA, PCA, ICA, NMF, LSI, etc.



Infinite Latent SVM

- RegBayes framework:


$$\begin{aligned} \min_{p(\mathcal{M}), \xi} \quad & \text{KL}(p(\mathcal{M}) \parallel \pi(\mathcal{M})) - \sum_{n=1}^N \int \log p(\mathbf{x}_n | \mathcal{M}) p(\mathcal{M}) d\mathcal{M} + U(\xi) \\ \text{s.t. :} \quad & p(\mathcal{M}) \in \mathcal{P}_{\text{post}}(\xi), \end{aligned}$$

convex function

direct and rich constraints on posterior distribution

- Model – latent feature model
- Prior – Indian Buffet process
- Likelihood – Gaussian likelihood
- Posterior constraints – max-margin constraints


Beta-Bernoulli Latent Feature Model




- A random **finite** binary latent feature models

$$\pi_k | \alpha \sim \text{Beta}\left(\frac{\alpha}{K}, 1\right)$$

$$z_{ik} | \pi_k \sim \text{Bernoulli}(\pi_k)$$

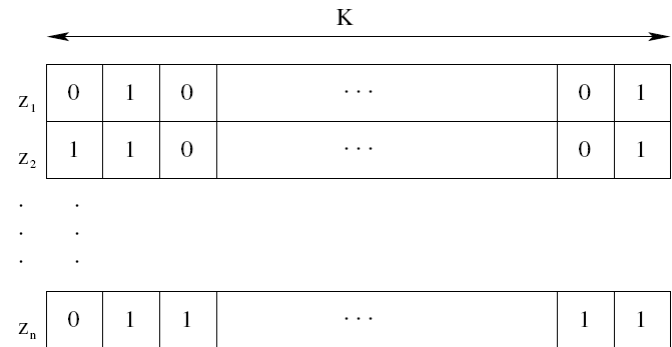

- π_k is the relative probability of each feature being on, e.g.,

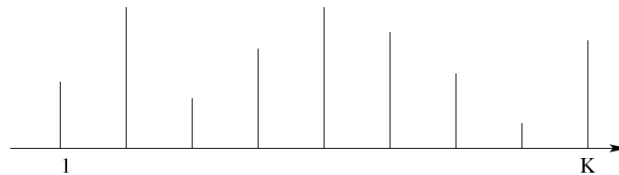


- $z_{i.}$ are binary vectors, giving the latent structure that's used to generate the data, e.g.,

$$\mathbf{x}_i \sim \mathcal{N}(\boldsymbol{\eta}^\top z_{i.}, \delta^2)$$



Indian Buffet Process

- A **stochastic process** on **infinite** binary feature matrices
- Generative procedure:
 - Customer 1 chooses the first K_1 dishes: $K_1 \sim \text{Poisson}(\alpha)$
 - Customer i chooses:
 - Each of the existing dishes with probability $\frac{m_k}{i}$
 - K_i additional dishes, where $K_i \sim \text{Poisson}(\frac{\alpha}{i})$

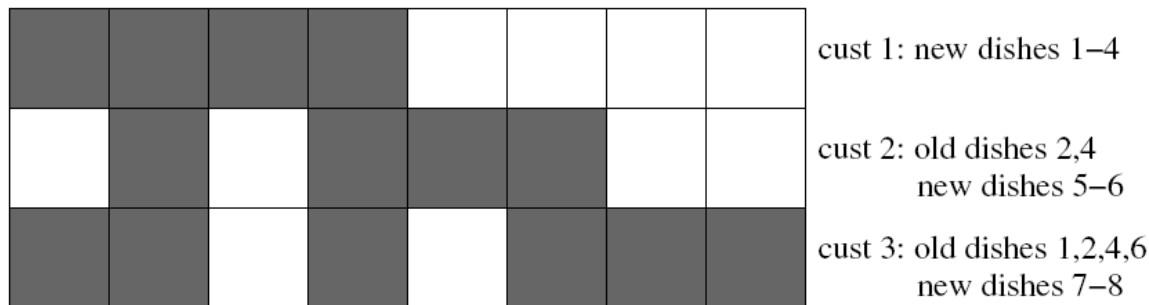

$$Z_{i.} \sim \text{IBP}(\alpha)$$

Posterior Constraints – classification



- Suppose latent features \mathbf{z} are given, we define *latent discriminant function*:

$$f(y, \mathbf{x}, \mathbf{z}; \boldsymbol{\eta}) = \boldsymbol{\eta}^\top \mathbf{g}(y, \mathbf{x}, \mathbf{z})$$

- Define *effective discriminant function* (reduce uncertainty):

$$f(y, \mathbf{x}; p(\mathbf{Z}, \boldsymbol{\eta})) = \mathbb{E}_{p(\mathbf{Z}, \boldsymbol{\eta})}[f(y, \mathbf{x}, \mathbf{z}; \boldsymbol{\eta})] = \mathbb{E}_{p(\mathbf{Z}, \boldsymbol{\eta})}[\boldsymbol{\eta}^\top \mathbf{g}(y, \mathbf{x}, \mathbf{z})]$$

- Posterior constraints with max-margin principle


$$\forall n \in \mathcal{I}_{\text{tr}}, \forall y : f(y_n, \mathbf{x}_n; p(\mathbf{Z}, \boldsymbol{\eta})) - f(y, \mathbf{x}_n; p(\mathbf{Z}, \boldsymbol{\eta})) \geq \ell(y, y_n) - \xi_n$$




Experimental Results

- Classification
 - Accuracy and F1 scores on TRECVID2003 and Flickr image datasets

Model	TRECVID2003		Flickr	
	Accuracy	F1 score	Accuracy	F1 score
EFH+SVM	0.565 ± 0.0	0.427 ± 0.0	0.476 ± 0.0	0.461 ± 0.0
MMH	0.566 ± 0.0	0.430 ± 0.0	0.538 ± 0.0	0.512 ± 0.0
IBP+SVM	0.553 ± 0.013	0.397 ± 0.030	0.500 ± 0.004	0.477 ± 0.009
iLSVM	0.563 ± 0.010	0.448 ± 0.011	0.533 ± 0.005	0.510 ± 0.010

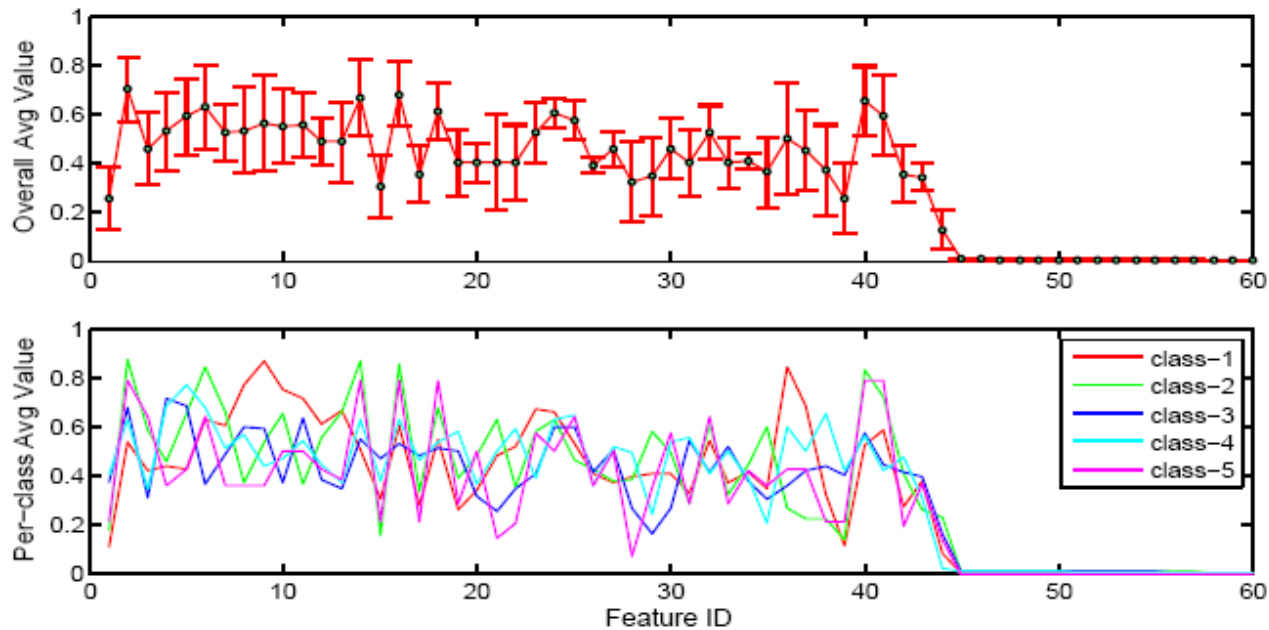


Summary



Infinite SVM (iSVM)


Infinite Latent SVM (iLSVM)

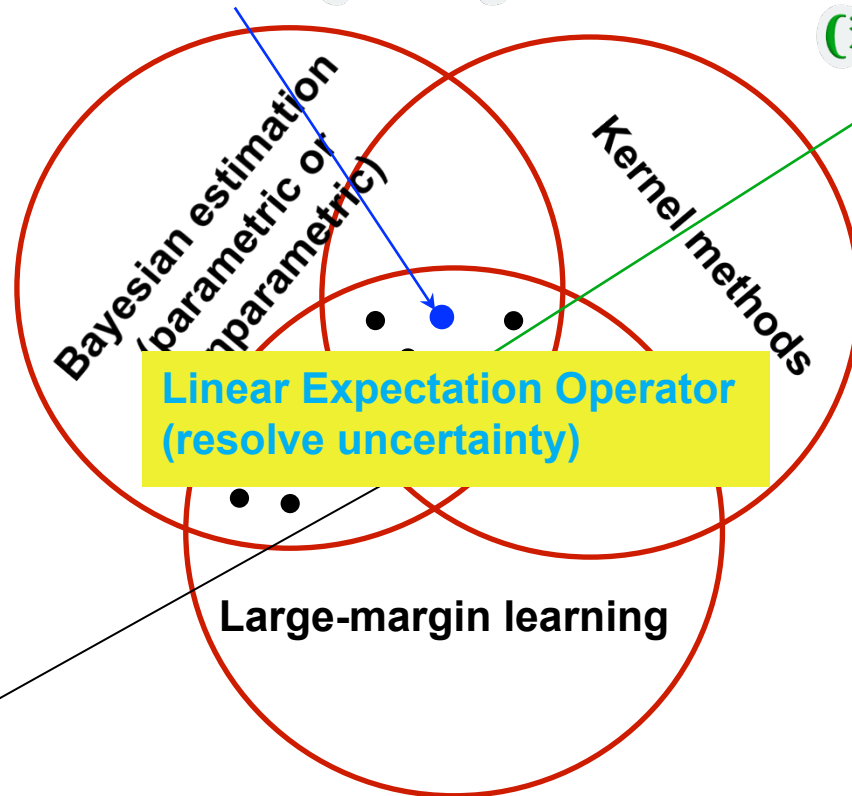

Summary



- A general framework of MaxEnDNet for learning structured input/output models
 - Subsumes the standard M³Ns
 - Model averaging: PAC-Bayes theoretical error bound
 - Entropic regularization: sparse M³Ns
 - **Generative + discriminative: latent variables, semi-supervised learning on partially labeled data, fast inference**
- PoMEN
 - Provides an elegant approach to incorporate latent variables and structures under max-margin framework
 - Enable Learning arbitrary graphical models discriminatively
- Predictive Latent Subspace Learning
 - MedLDA for text topic learning
 - Med total scene model for image understanding
 - Med latent MNs for multi-view inference
- Bayesian nonparametrics meets max-margin learning
- Experimental results show the advantages of max-margin learning over likelihood methods in **EVERY** case.



Remember: Elements of Learning

- Here are some important elements to consider before you start:
 - Task:
 - Embedding? Classification? Clustering? Topic extraction? ...
 - Data and other info:
 - Input and output (e.g., continuous, binary, counts, ...)
 - Supervised or unsupervised, of a blend of everything?
 - Prior knowledge? Bias?
 - Models and paradigms:
 - BN? MRF? Regression? SVM?
 - Bayesian/Frequentist? Parametric/Nonparametric?
 - Objective/Loss function:
 - MLE? MCLE? Max margin?
 - Log loss, hinge loss, square loss? ...
 - Tractability and exactness trade off:
 - Exact inference? MCMC? Variational? Gradient? Greedy search?
 - Online? Batch? Distributed?
 - Evaluation:
 - Visualization? Human interpretability? Perplexity? Predictive accuracy?