



# Machine-Level Programming III: Procedures

18-213/18-613: Introduction to Computer Systems

6<sup>th</sup> Lecture, May 23, 2024

# If you're struggling with assembly

## ■ Chapter 3 of the textbook is your friend

- More detailed explanations of everything in these lectures
- Work through the practice problems
- Ask for help with the practice problems
- Today's lecture will take us to the end of 3.7

## ■ Lots of tips, tricks, and guides have been posted on Piazza

## ■ Talk it out with a friend

- “Help me understand what `jmp * .L32(,%rdx,8)` does in general” is an OK discussion to have; not an AIV
- “Help me understand what `jmp * .L32(,%rdx,8)` does *in phase 8 of this binary bomb*”, on the other hand, *is* an AIV
- If you haven’t got a friend handy, try a rubber duck. Really!

# Recap: Finding Jump Table in Binary

```
00000000004005e0 <switch_eg>:  
.  
. . .  
4005e9: ff 24 fd f0 07 40 00 jmpq *0x4007f0(,%rdi,8)  
. . .
```

```
% gdb switch  
(gdb) x /8xg 0x4007f0  
0x4007f0: 0x0000000000400614 0x00000000004005f0  
0x400800: 0x00000000004005f8 0x0000000000400602  
0x400810: 0x0000000000400614 0x000000000040060b  
0x400820: 0x000000000040060b 0x2c646c25203d2078  
(gdb)
```

# Switch Statements on the Shark Machines

- **Nuance: It is desirable for addresses to be relative rather than absolute.**
  - Since offsets can be smaller than whole addresses, the code takes up less memory
  - Relative vs absolute addresses also make it easier to link code by making it “position independent”. We’ll talk more about that later.
  - **To this end, x86-64 has an addressing mode which provides hardware support for managing addresses relative to the %rip.**
- **Nuance: Loads and stores with 64-bit displacement are available only via %eax.**
  - Why? Its all wires! (See Prof. Nace in 18-240 for details!)

# Switch Statements on the Shark Machines

- To make things work nicely with the constraints on the prior page:
  - Rather than keeping absolute addresses, the jump table address is kept relative to the %rip.
  - The address of the target code is placed into the %rax, because only that register can contain a 64-bit target address

# Switch Statements on the Shark Machines

## ■ The code that does the jumping looks like this:

```
# Handle the cases too small or too large for the switch
# Negative cases look large to ja and offsets can be used
# to shift the smallest case to 0.
0x00000000004017e9 <+41>:    cmp      $0xc,%esi
0x00000000004017ec <+44>:    ja       0x401818 <foo+88>

# Get a pointer to the jump table
# %rip points to next addr, so %rdx becomes 0x498018 (jump table)
0x00000000004017ee <+46>:    lea      0x96823(%rip),%rdx

# Get offset from %rsi-th index of jump table
0x00000000004017f5 <+53>:    movslq  (%rdx,%rsi,4),%rax

# Add that offset to the address of the jump table
0x00000000004017f9 <+57>:    add     %rdx,%rax

# Jump to that address, ultimately an offset from %rip
0x00000000004017fc <+60>:    jmp     *%rax
```

# Switch Statements on the Shark Machines

- The jump table contains offsets relative to the start of the jump table

```
(gdb) x/20dw 0x498008
```

0x498018:	-616376	-616448	-616448	-616448
0x498028:	-616472	-616448	-616461	-616448
0x498038:	-616392	-616448	-616416	-616448
0x498048:	-616416	0	0	0

```
(gdb) x/20xw 0x498008
```

0x498008:	0x74636e75	0x206e6f69	0x216f6f66	0x00000000
0x498018:	0xffff69848	0xffff69800	0xffff69800	0xffff69800
0x498028:	0xffff697e8	0xffff69800	0xffff697f3	0xffff69800
0x498038:	0xffff69838	0xffff69800	0xffff69820	0xffff69800
0x498048:	0xffff69820	0x00000000	0x00000000	0x00000000

# Switch Statements on the Shark Machines

- Ultimately, the target address is equal to the %rip + the offset to the start of jump table, plus an offset (possibly negative) from the start of the jump table to the target code.
- This target address is computed, placed into the %rax, and jumped to

```
# Get a pointer to the jump table
# %rip points to next addr, so %rdx becomes 0x498018 (jump table)
0x00000000004017ee <+46>:    lea      0x96823(%rip),%rdx

# Get offset from %rsi-th index of jump table
0x00000000004017f5 <+53>:    movslq  (%rdx,%rsi,4),%rax

# Add that offset to the address of the jump table
0x00000000004017f9 <+57>:    add     %rdx,%rax


# Jump to that address, ultimately an offset from %rip
0x00000000004017fc <+60>:    jmp     *%rax
```

# Today

## ■ Procedures

- **Mechanisms** CSAPP 3.7 preamble
- **Stack Structure** CSAPP 3.7.1
- **Calling Conventions**
  - **Passing control** CSAPP 3.7.2
  - **Passing data** CSAPP 3.7.3
  - **Managing local data** CSAPP 3.7.4 – 3.7.5
- **Illustration of Recursion** CSAPP 3.7.6

# Procedures

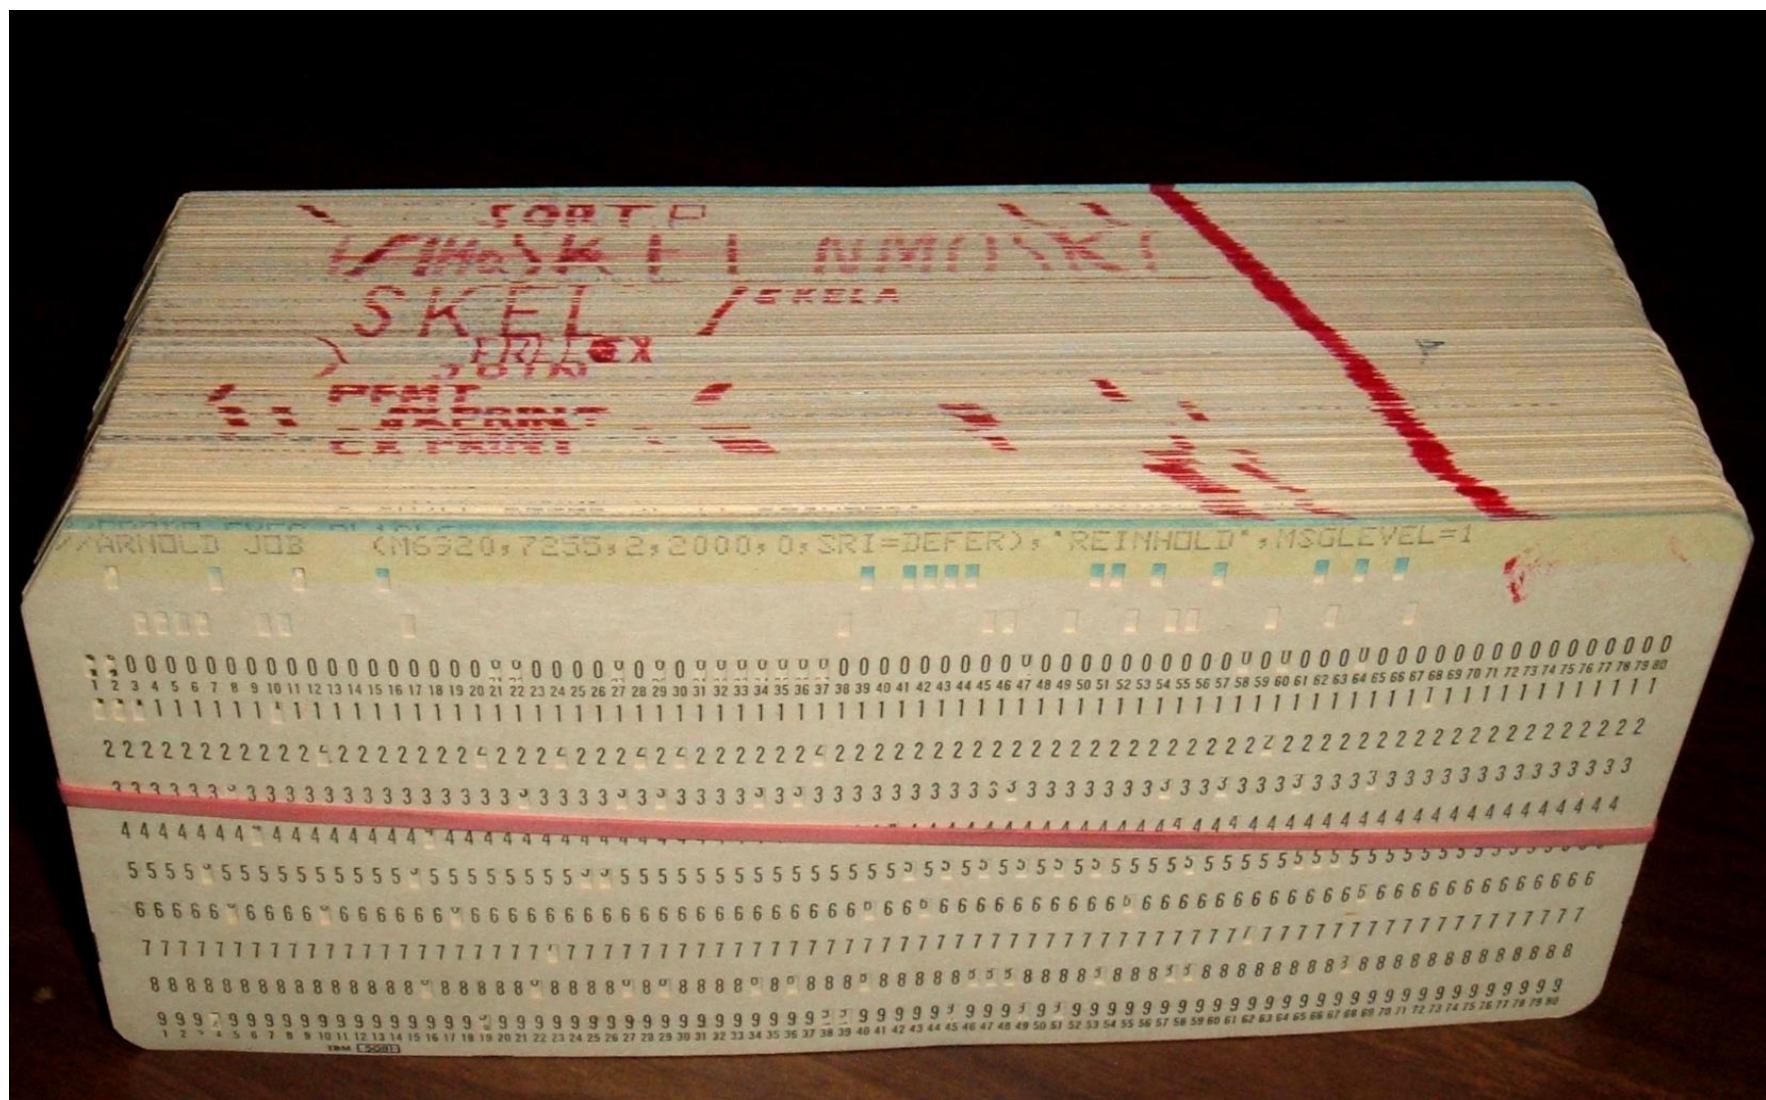

# Mechanisms in Procedures

## What's needed?

### ■ Passing control

- To beginning of procedure code
- Back to return point

### ■ Passing data

- Procedure arguments
- Return value

### ■ Memory management

- Allocate during procedure execution
- Deallocate upon return

```
P (...) {  
    •  
    •  
    y = Q(x);  
    print(y)  
    •  
}
```

```
int Q(int i)  
{  
    int t = 3*i;  
    int v[10];  
    •  
    •  
    return v[t];  
}
```

# Mechanisms in Procedures

## ■ Passing control


- To beginning of procedure code
- Back to return point

## ■ Passing data

- Procedure arguments
- Return value

## ■ Memory management

- Allocate during procedure execution
- Deallocate upon return

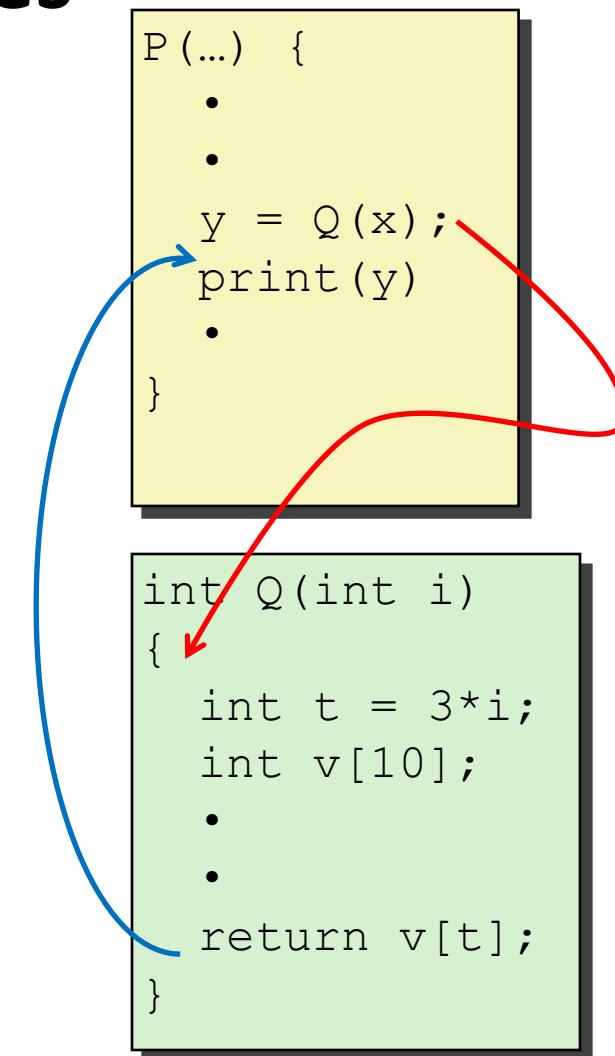

# Mechanisms in Procedures

## ■ Passing control

- To beginning of procedure code
- Back to return point

## ■ Passing data

- Procedure arguments
- Return value

## ■ Memory management

- Allocate during procedure execution
- Deallocate upon return

```
P (...) {  
    •  
    •  
    y = Q(x);  
    print(y)  
    •  
}
```

```
int Q(int i)  
{  
    int t = 3*i;  
    int v[10];  
    •  
    •  
    return v[t];  
}
```

# Mechanisms in Procedures

## ■ Passing control

- To beginning of procedure code
- Back to return point

## ■ Passing data

- Procedure arguments
- Return value

## ■ Memory management

- Allocate during procedure execution
- Deallocate upon return

```
P (...) {  
    •  
    •  
    y = Q(x);  
    print(y)  
    •  
}
```

```
int Q(int i)  
{  
    int t = 3*i;  
    int v[10];  
    •  
    •  
    return v[t];  
}
```

# Mechanisms in Procedures

## ■ Passing control

- To beginning of procedure code
- Back to return point

## ■ Passing data

- Procedure arguments
- Return value

## ■ Memory management

- Allocate during procedure execution
- Deallocate upon return

## ■ Mechanisms all implemented with machine instructions

## ■ x86-64 implementation of a procedure uses only those mechanisms required

```
P (...) {  
    •  
    •  
    y = Q(x);  
    print(y)  
    •  
}
```

```
int Q(int i)  
{  
    int t = 3*i;  
    int v[10];  
    •  
    •  
    return v[t];  
}
```

# Mechanisms in Procedures

```
P (...) {
```

Machine instructions implement the mechanisms, but the choices are determined by designers.

These choices make up the **Application Binary Interface (ABI)**.

- Deallocate upon return
- **Mechanisms all implemented with machine instructions**
- **x86-64 implementation of a procedure uses only those mechanisms required**

```
...  
int v[10];  
:  
:  
return v[t];  
}
```

# Today


## ■ Procedures

- Mechanisms
- Stack Structure
- Calling Conventions
  - Passing control
  - Passing data
  - Managing local data
- Illustration of Recursion

# x86-64 Stack

## ■ Region of memory managed with stack discipline

- Memory viewed as array of bytes.
- Different regions have different purposes.
- (Like ABI, a policy decision)

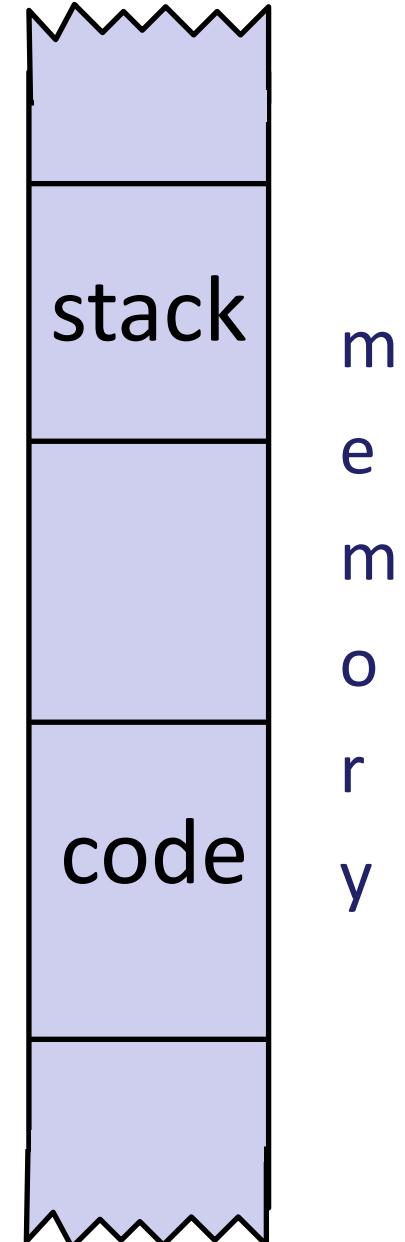


# x86-64 Stack

- Region of memory managed with stack discipline

Stack Pointer: `%rsp` →

Stack “Bottom”


Stack “Top”

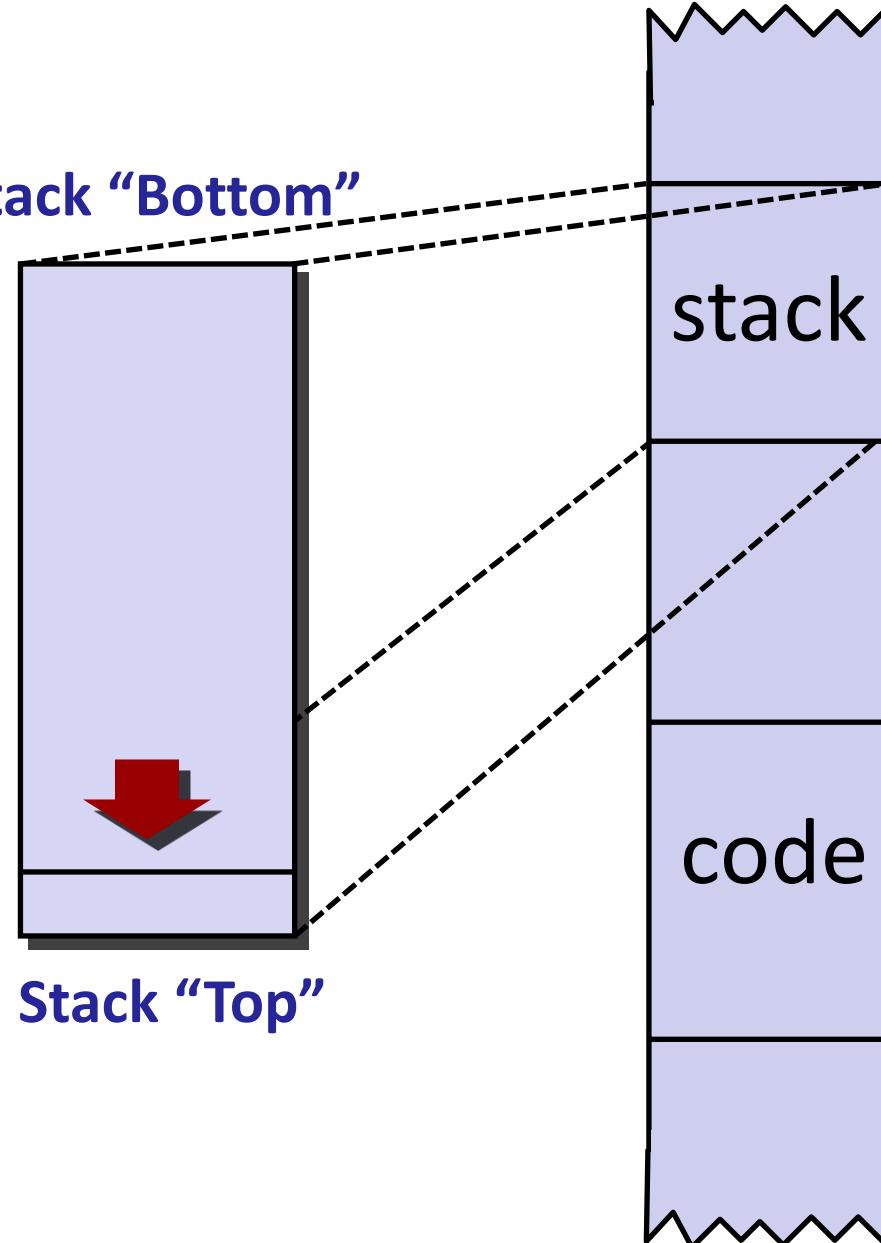

# x86-64 Stack

- Region of memory managed with stack discipline
- Grows toward lower addresses
- Register `%rsp` contains lowest stack address
  - address of “top” element


Stack Pointer: `%rsp` →

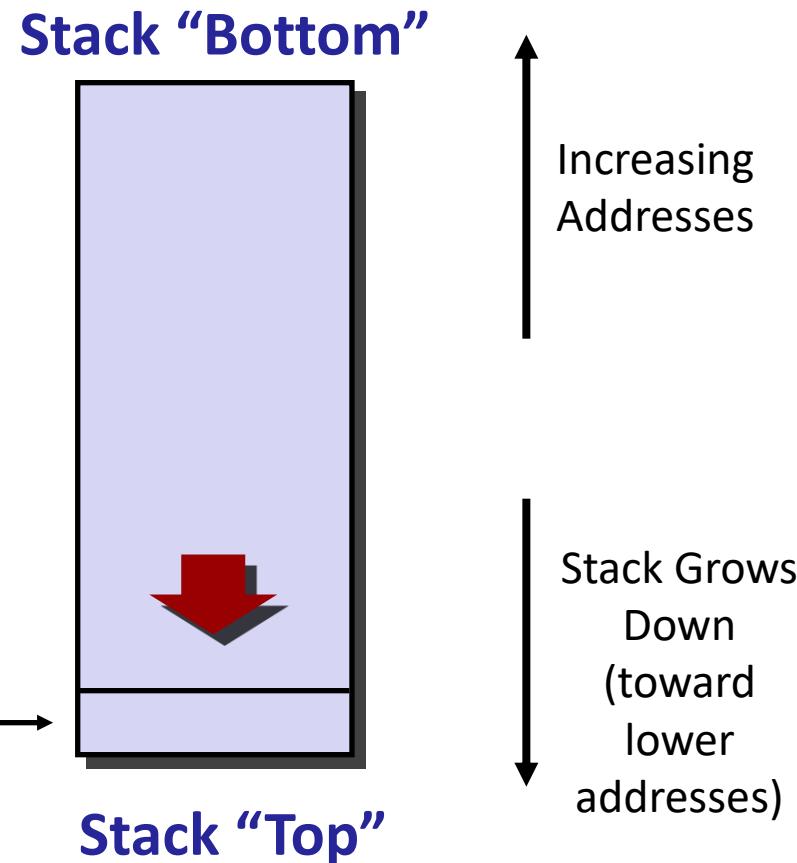

# x86-64 Stack: Push

## ■ `pushq Src`


- Fetch operand at *Src*
- Decrement `%rsp` by 8
- Write operand at address given by `%rsp`

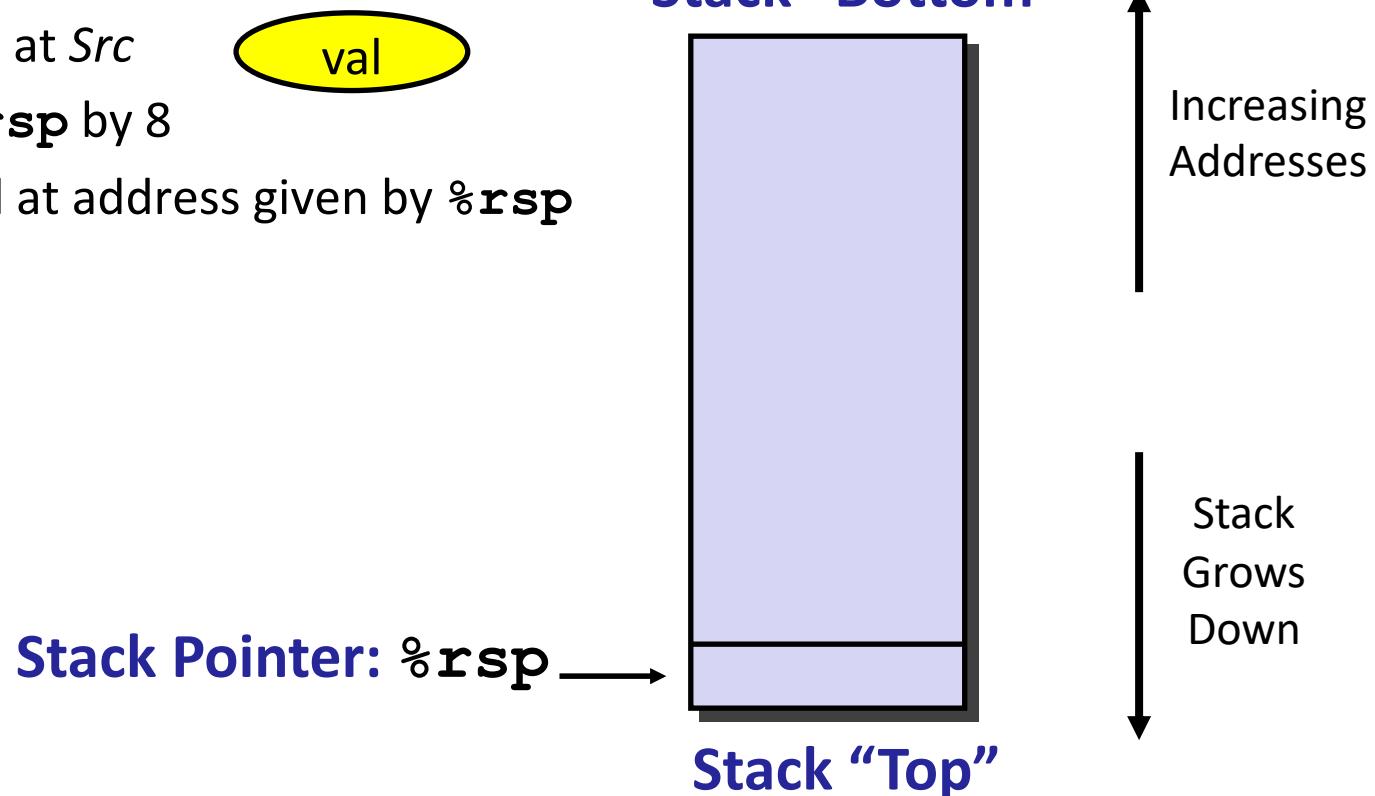

# x86-64 Stack: Push

## ■ `pushq Src`


- Fetch operand at *Src*
- Decrement `%rsp` by 8
- Write operand at address given by `%rsp`

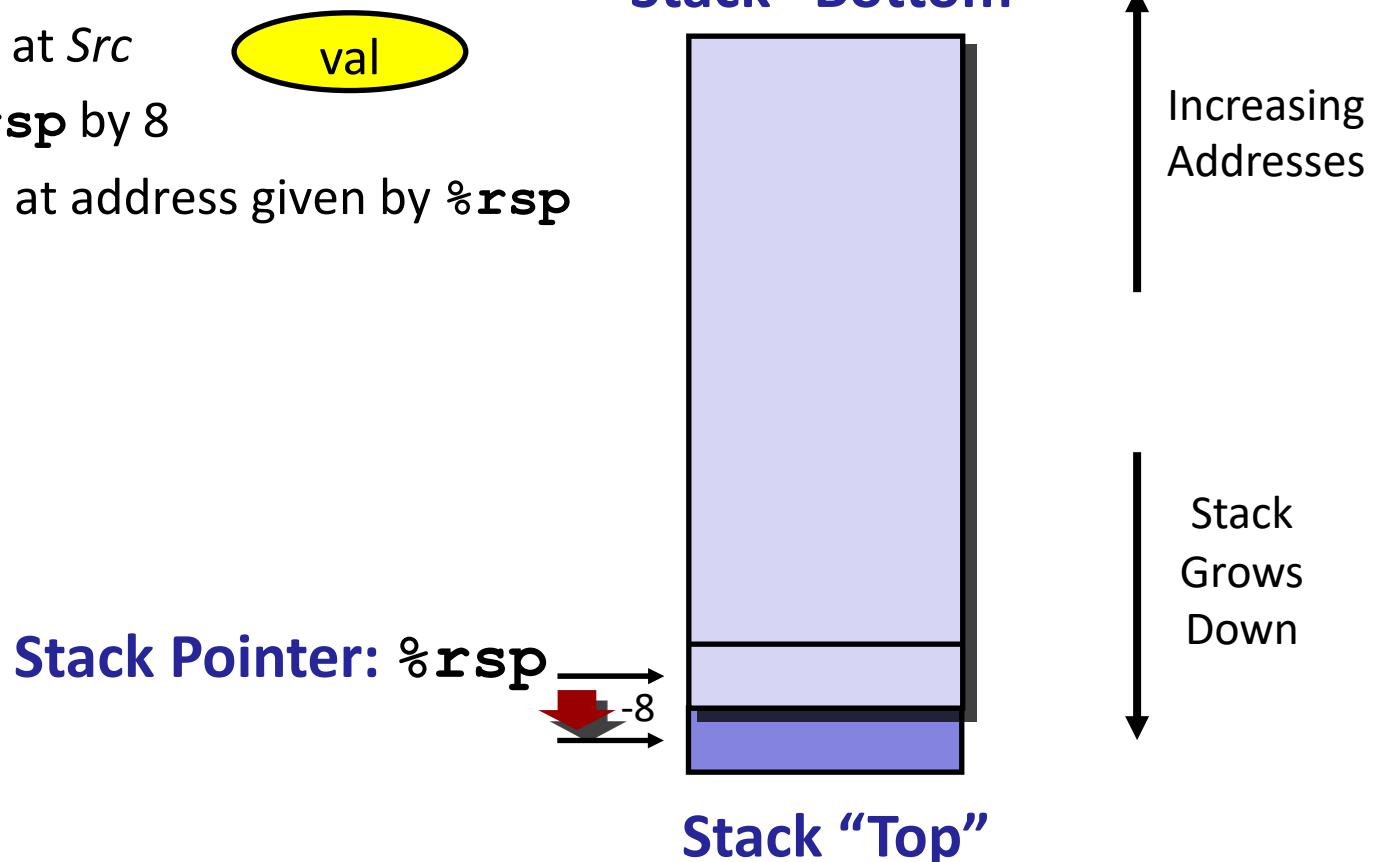

# x86-64 Stack: Pop

## ■ **popq Dest**

- Read value at address given by `%rsp`
- Increment `%rsp` by 8
- Store value at Dest (usually a register)

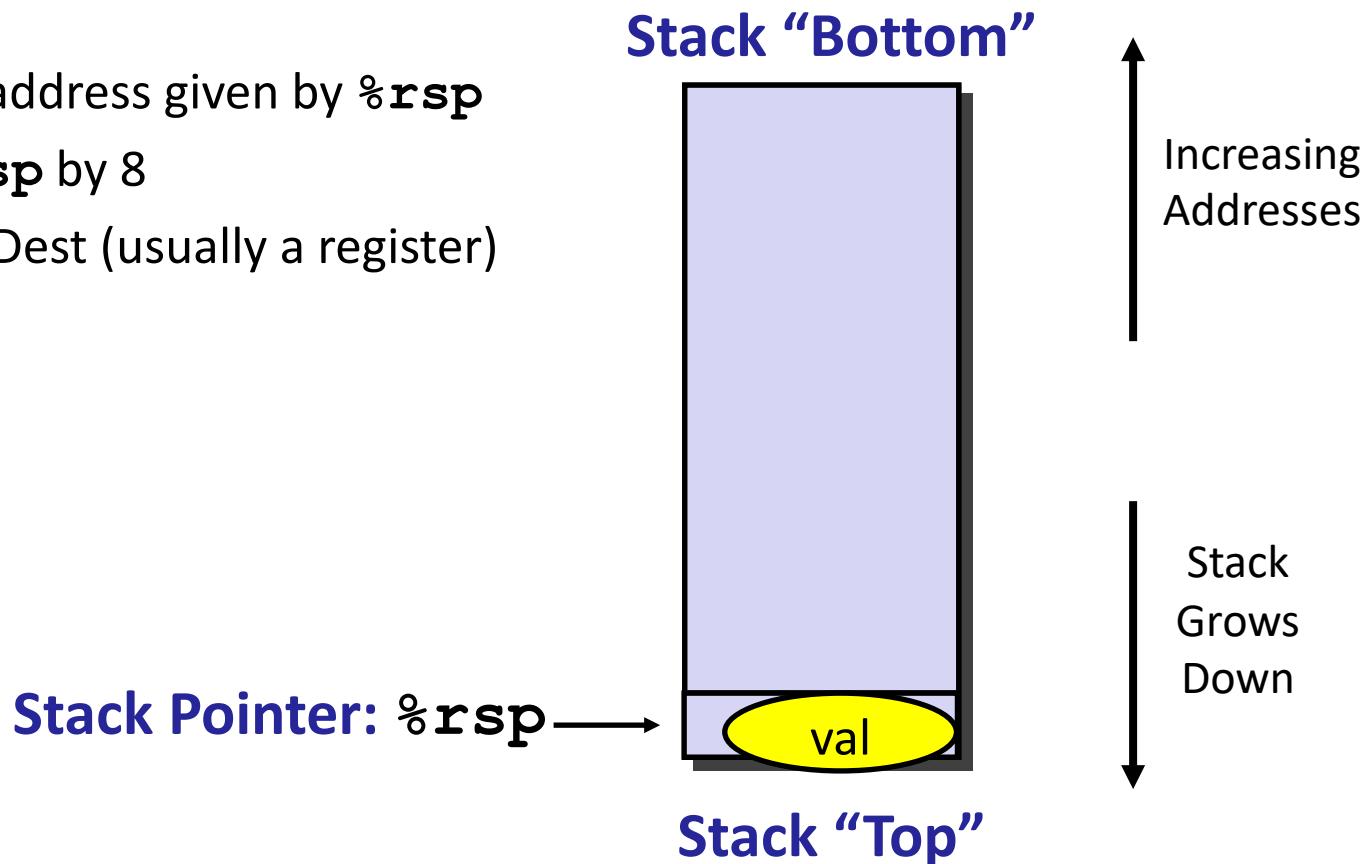

# x86-64 Stack: Pop


## ■ **popq Dest**

- Read value at address given by `%rsp`
- Increment `%rsp` by 8
- Store value at Dest (usually a register)



**Stack Pointer: %rsp**

**Stack “Bottom”**

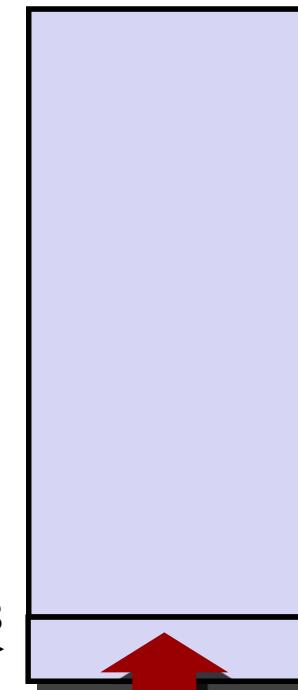

**Stack “Top”**

# x86-64 Stack: Pop

## ■ **popq Dest**

- Read value at address given by `%rsp`
- Increment `%rsp` by 8
- Store value at Dest (usually a register)

Stack Pointer: `%rsp` →

(The memory doesn't change,  
only the value of `%rsp`)

Stack “Bottom”



# Today

## ■ Procedures

- Mechanisms
- Stack Structure
- Calling Conventions
  - Passing control
  - Passing data
  - Managing local data
- Illustration of Recursion

# Code Examples

```
void multstore(long x, long y, long *dest)
{
    long t = mult2(x, y);
    *dest = t;
}
```

```
0000000000400540 <multstore>:
    400540: push    %rbx          # Save %rbx
    400541: mov     %rdx,%rbx    # Save dest
    400544: callq   400550 <mult2>  # mult2(x,y)
    400549: mov     %rax,(%rbx)   # Save at dest
    40054c: pop     %rbx          # Restore %rbx
    40054d: retq               # Return
```

```
long mult2(long a, long b)
{
    long s = a * b;
    return s;
}
```

```
0000000000400550 <mult2>:
    400550: mov     %rdi,%rax    # a
    400553: imul   %rsi,%rax    # a * b
    400557: retq               # Return
```

# Procedure Control Flow

- Use stack to support procedure call and return

- **Procedure call: `call label`**

- Push return address on stack
  - Jump to *label*

- **Return address:**

- Address of the next instruction right after call
  - Example from disassembly


- **Procedure return: `ret`**

- Pop address from stack
  - Jump to address

# Control Flow Example #1


```
0000000000400540 <multstore>:  
.  
.  
400544: callq 400550 <mult2>  
400549: mov    %rax, (%rbx)  
.  
.
```

```
0000000000400550 <mult2>:  
400550: mov    %rdi, %rax  
.  
.  
400557: retq
```

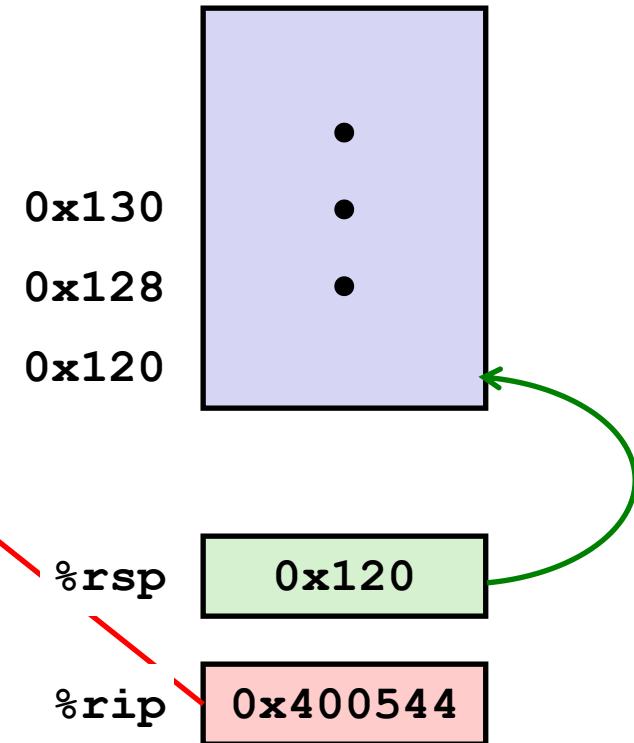

# Control Flow Example #2


```
0000000000400540 <multstore>:  
.  
.  
400544: callq 400550 <mult2>  
400549: mov    %rax, (%rbx) ←
```

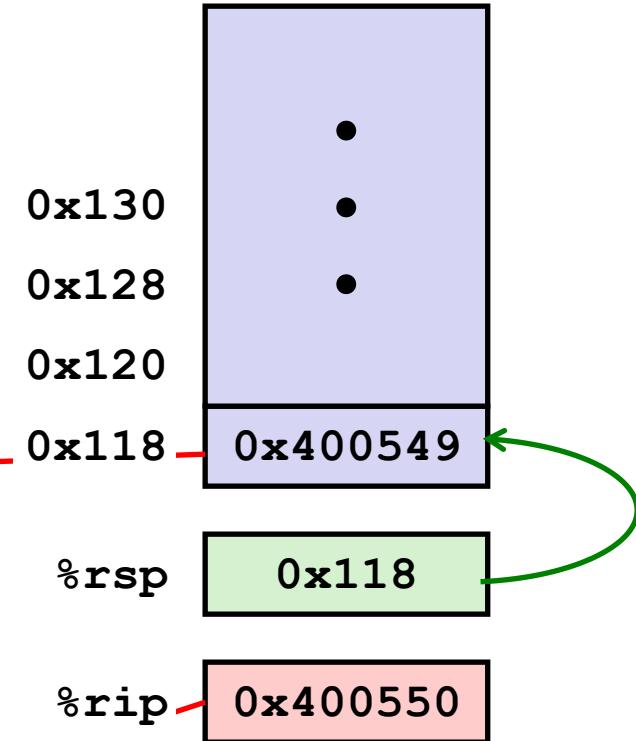

```
0000000000400550 <mult2>:  
400550: mov    %rdi, %rax ←  
. .  
400557: retq
```

# Control Flow Example #3

```
0000000000400540 <multstore>:  
.  
.  
400544: callq 400550 <mult2>  
400549: mov    %rax, (%rbx) ←
```

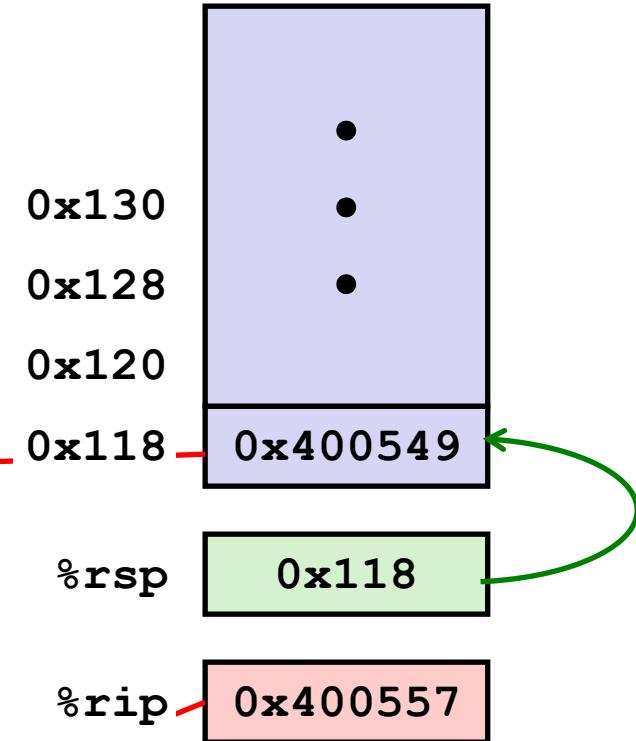


```
0000000000400550 <mult2>:  
400550: mov    %rdi,%rax  
. .  
400557: retq ←
```

# Control Flow Example #4

```
0000000000400540 <multstore>:  
.  
.  
400544: callq 400550 <mult2>  
400549: mov    %rax, (%rbx) ←
```

```
0000000000400550 <mult2>:  
400550: mov    %rdi, %rax  
. .  
400557: retq
```

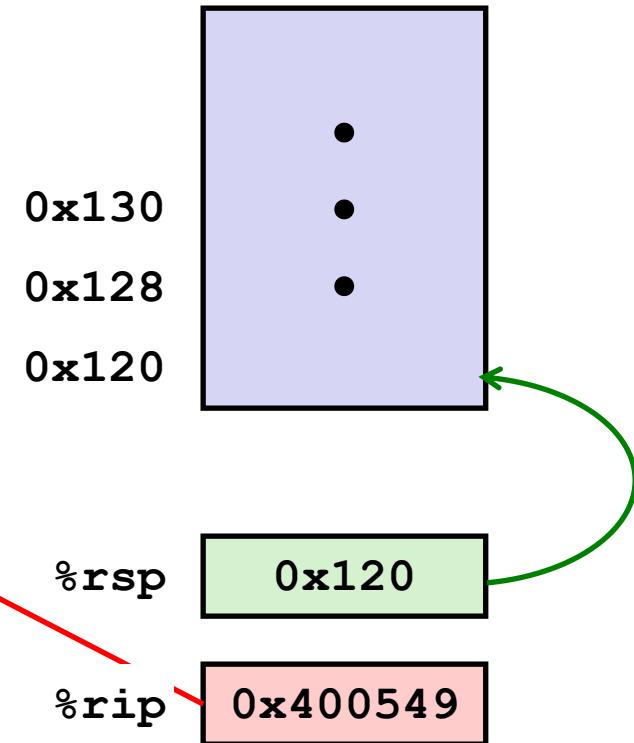

# Today

## ■ Procedures

- Mechanisms
- Stack Structure
- Calling Conventions
  - Passing control
  - Passing data
  - Managing local data
- Illustrations of Recursion & Pointers


# Procedure Data Flow

## Registers

- First 6 integer arguments



## Stack

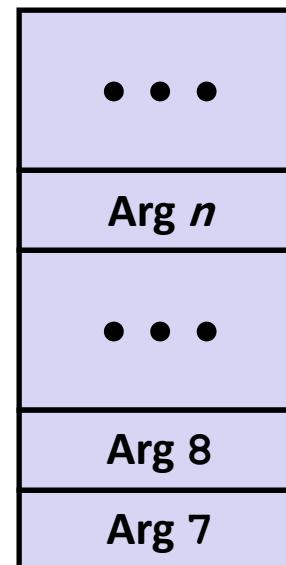

- Return value



- Only allocate stack space when needed

# Data Flow Examples

```
void multstore
    (long x, long y, long *dest)
{
    long t = mult2(x, y);
    *dest = t;
}
```

000000000400540 <multstore>:

```
# x in %rdi, y in %rsi, dest in %rdx
...
400541: mov    %rdx,%rbx          # Save dest
400544: callq  400550 <mult2>    # mult2(x,y)
# t in %rax
400549: mov    %rax,(%rbx)       # Save at dest
...
```

```
long mult2
    (long a, long b)
{
    long s = a * b;
    return s;
}
```

000000000400550 <mult2>:

```
# a in %rdi, b in %rsi
400550: mov    %rdi,%rax          # a
400553: imul   %rsi,%rax          # a * b
# s in %rax
400557: retq
```

# Return

# Today

## ■ Procedures

- Mechanisms
- Stack Structure
- Calling Conventions
  - Passing control
  - Passing data
  - Managing local data
- Illustration of Recursion

# Stack-Based Languages

## ■ Languages that support recursion


- e.g., C, Pascal, Java
- Code must be “*Reentrant*”
  - Multiple simultaneous instantiations of single procedure
- Need some place to store state of each instantiation
  - Arguments
  - Local variables
  - Return address

## ■ Stack discipline

- State for given procedure needed for limited time
  - From when called to when return
- Callee returns before caller does

## ■ Stack allocated in *Frames*

- state for single procedure instantiation

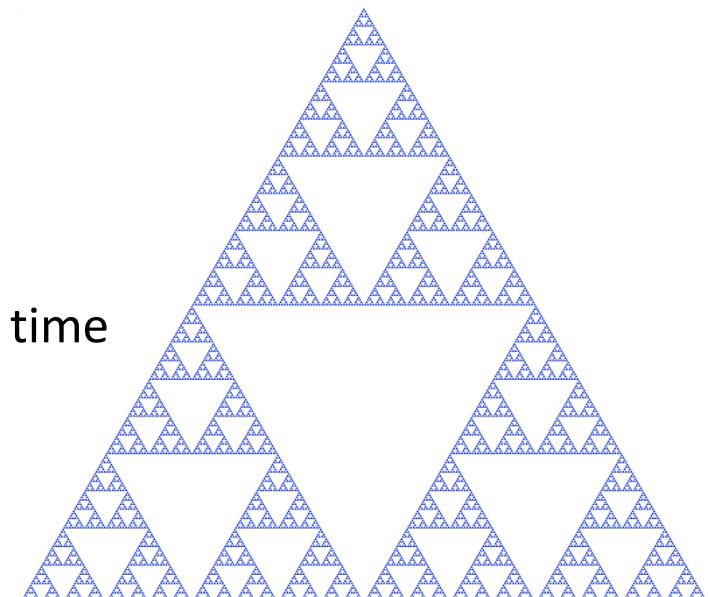


# Call Chain Example

```
yoo (...)  
{  
    •  
    •  
    who () ;  
    •  
    •  
}
```

```
who (...)  
{  
    • • •  
    amI () ;  
    • • •  
    amI () ;  
    • • •  
}
```

```
amI (...)  
{  
    •  
    •  
    amI () ;  
    •  
    •  
}
```

## Example Call Chain

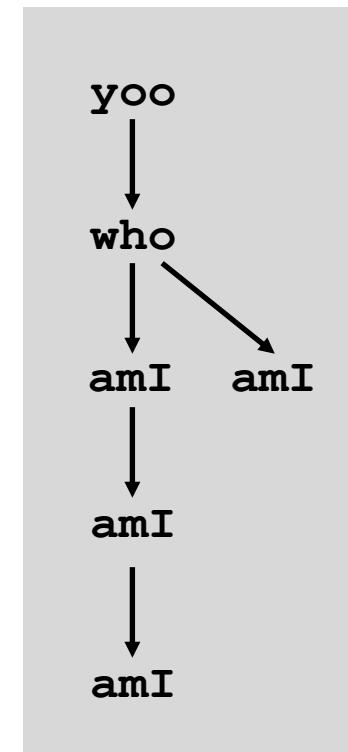


Procedure **amI ()** is recursive

# Stack Frames

## ■ Contents

- Return information
- Local storage (if needed)
- Temporary space (if needed)


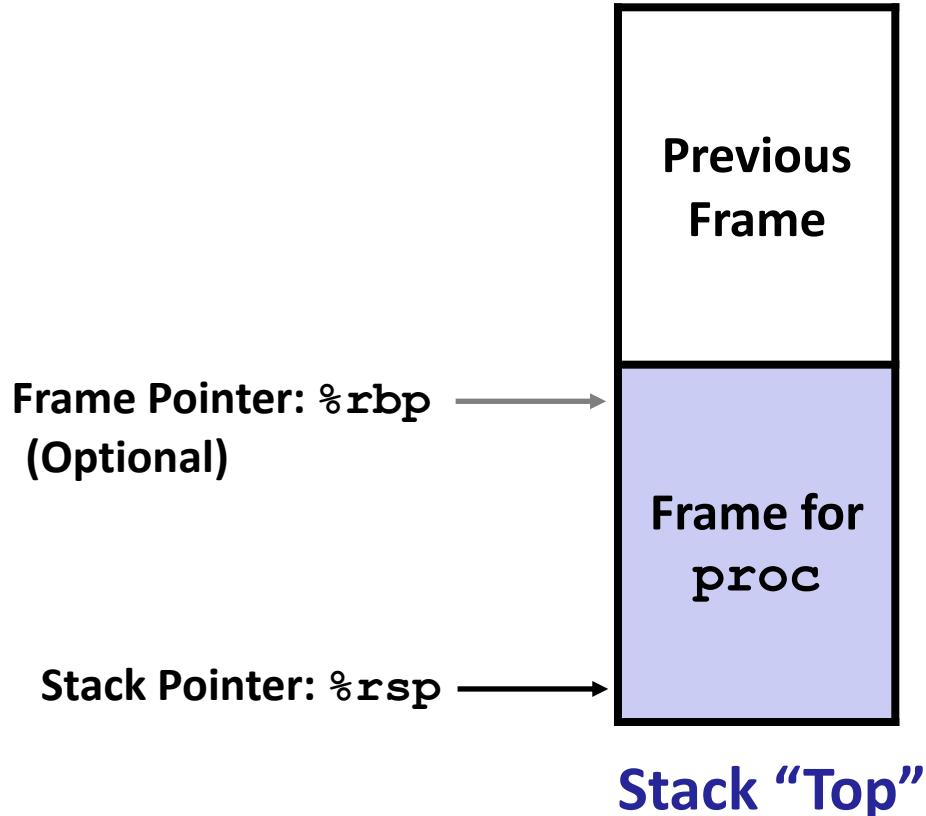


## ■ Management



- Space allocated when enter procedure
  - “Set-up” code
  - Includes push by **call** instruction
- Deallocated when return
  - “Tear-down” code
  - Includes pop by **ret** instruction

# Example


```
yoo (...)  
{  
    •  
    •  
    who () ;  
    •  
    •  
}
```

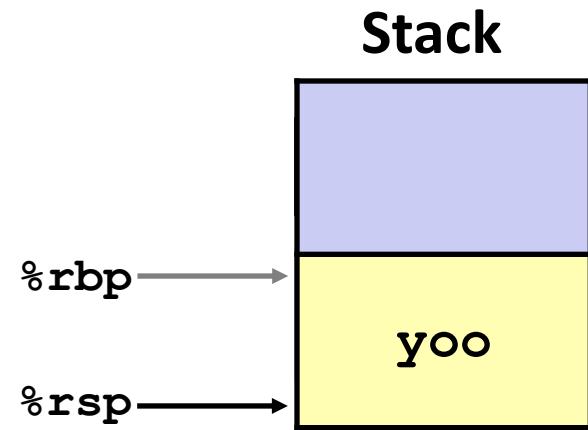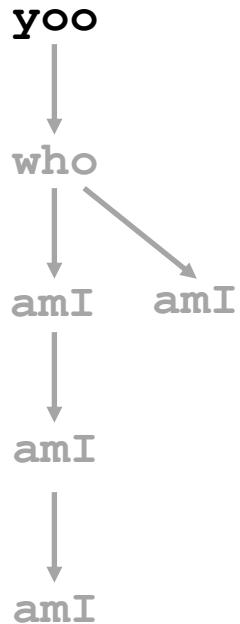




# Example

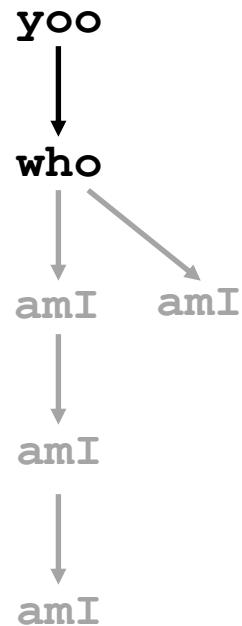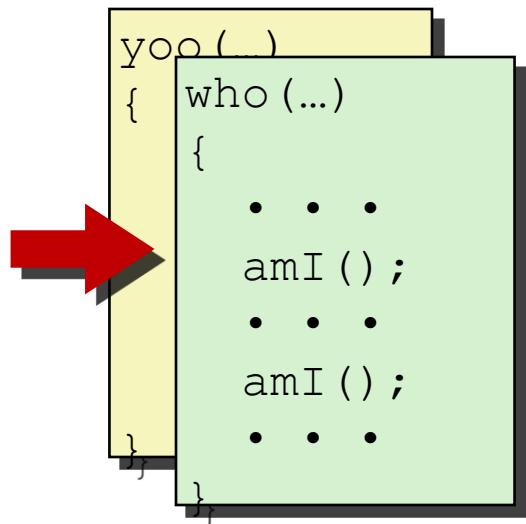



Stack

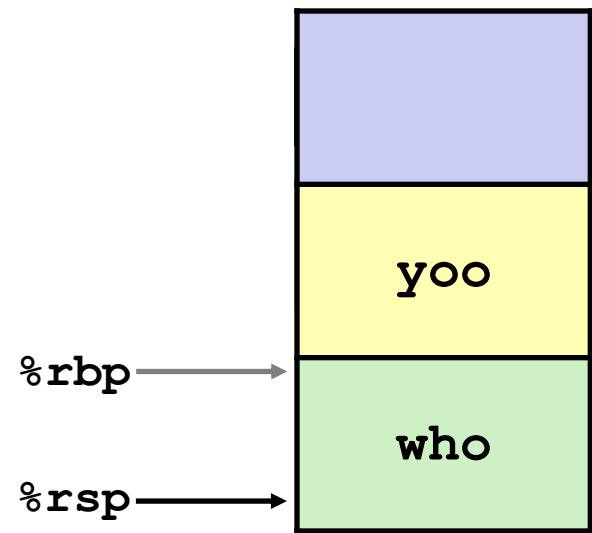


# Example

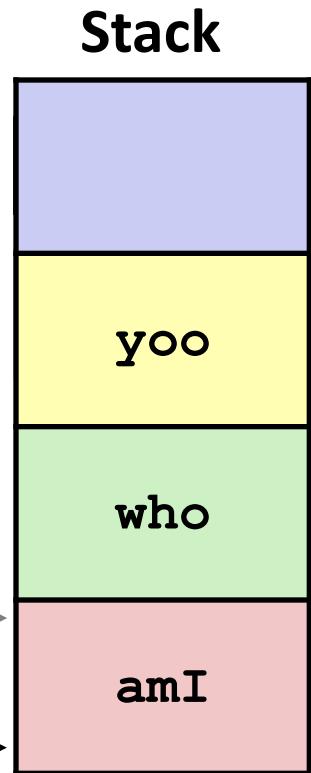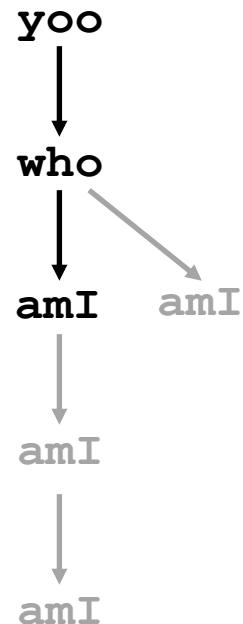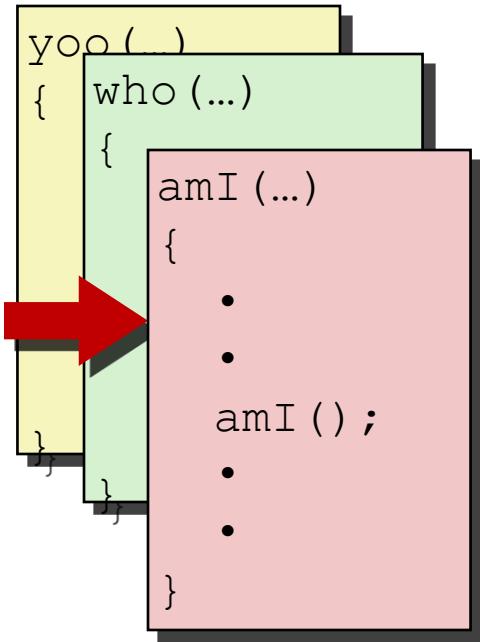




# Example

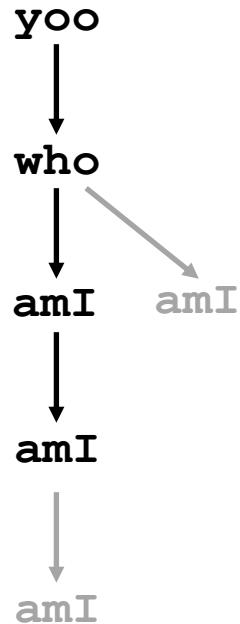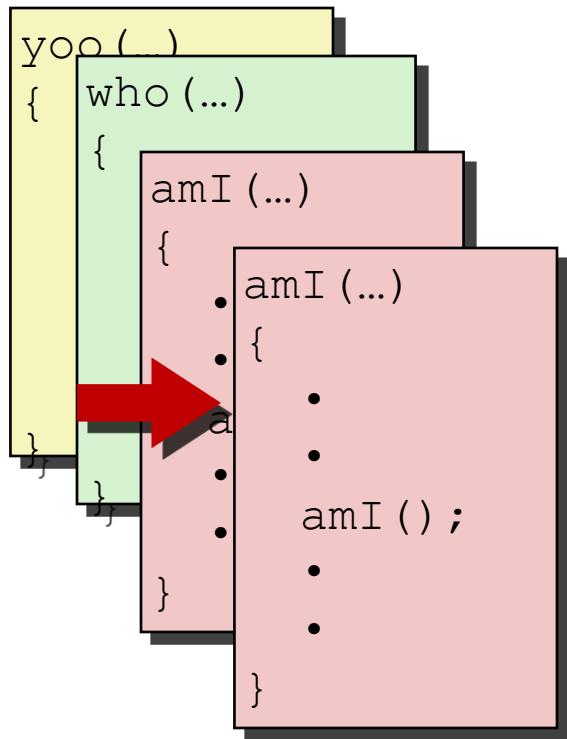



Stack

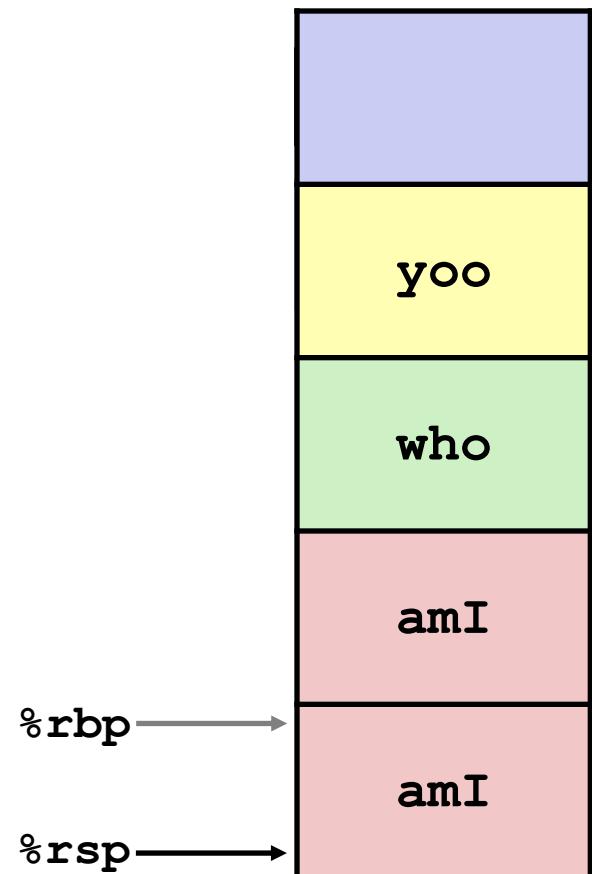


# Example

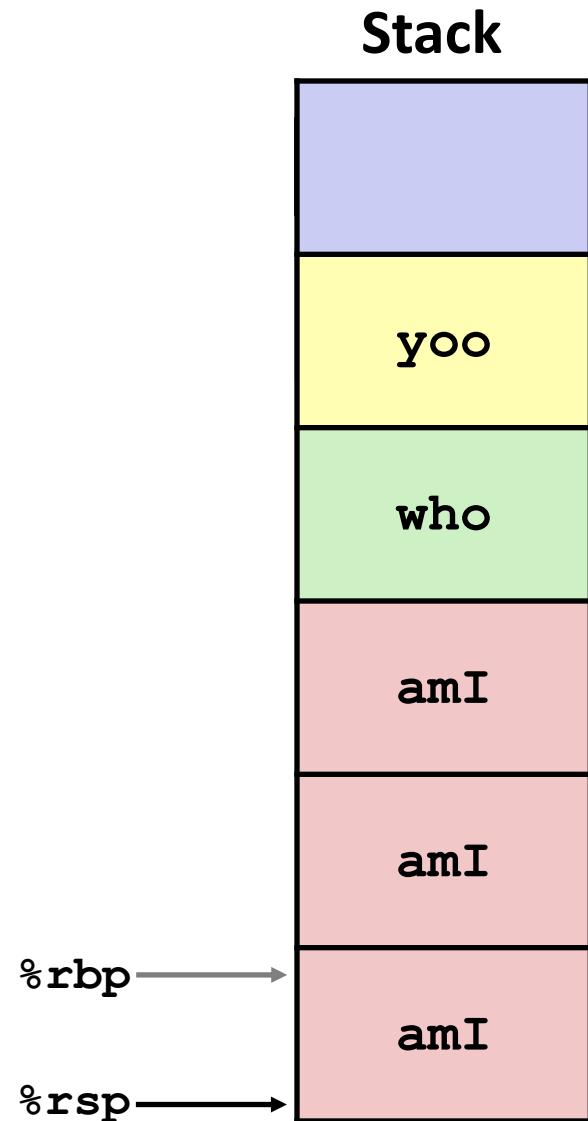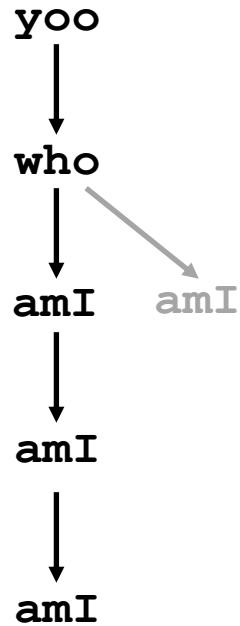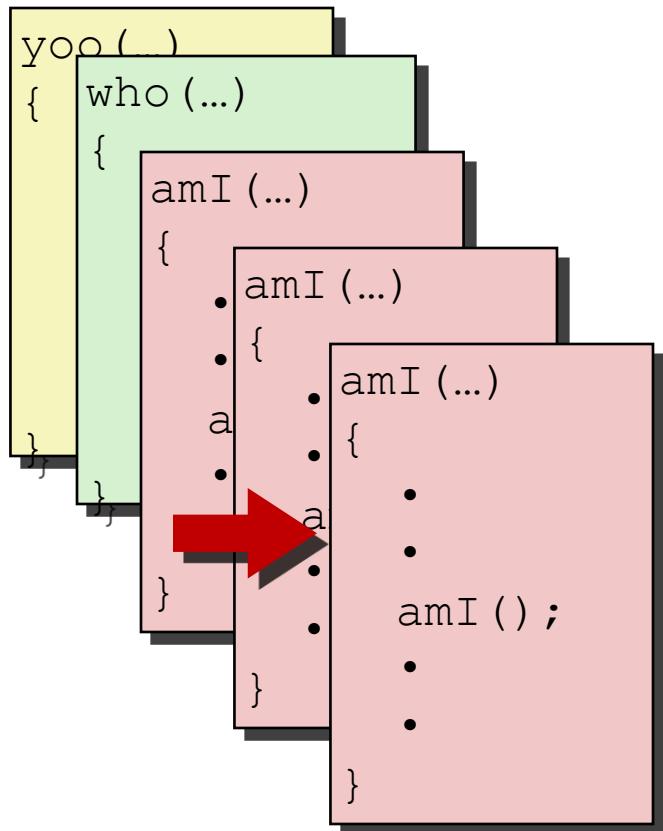

# Example

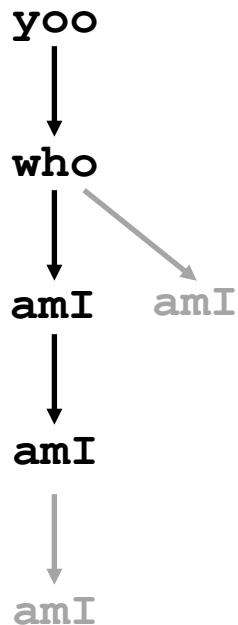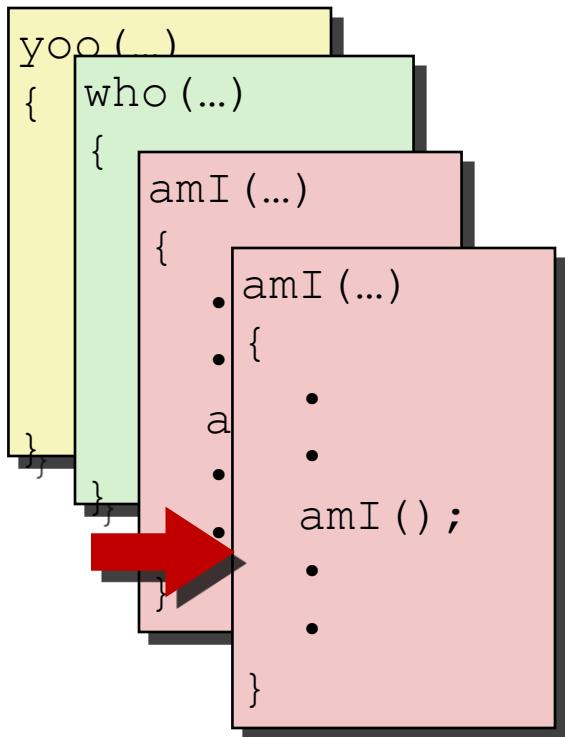


Stack

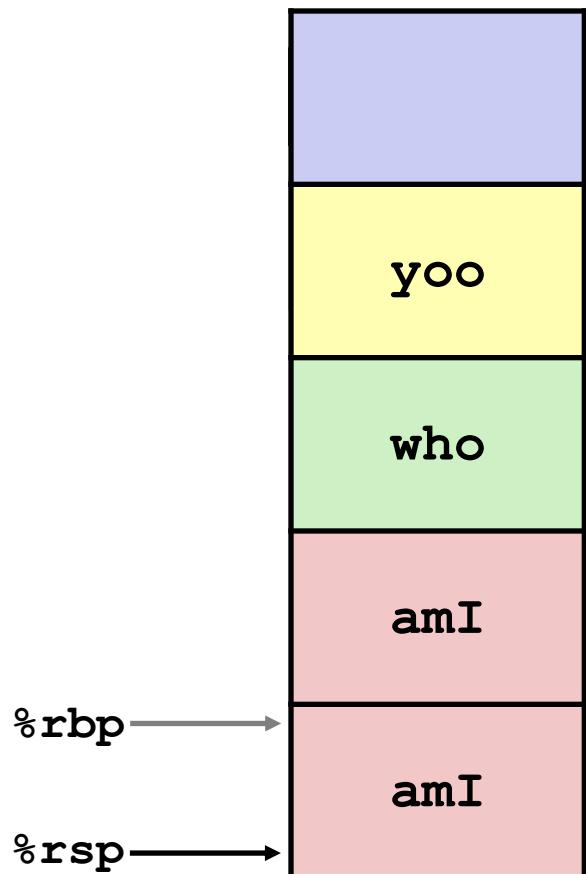


# Example

```
yoo(...)  
{   who(...)  
{     amI(...)  
{       .  
       .  
       amI();  
       .  
       .  
     }  
   }  
}
```


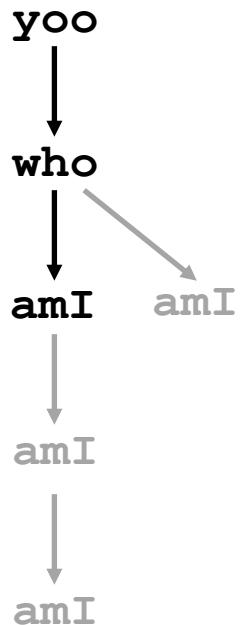


Stack

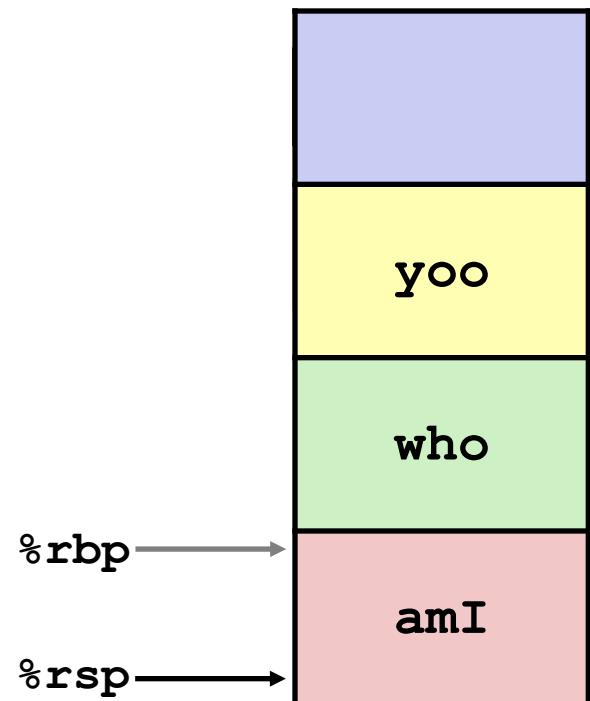


# Example



```
yoo(...)  
{   who(...)  
{  
    . . .  
    amI();  
    . . .  
    amI();  
    . . .  
}
```

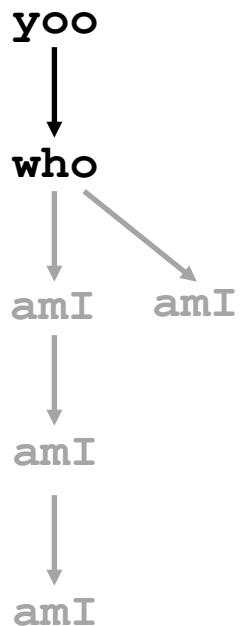


Stack

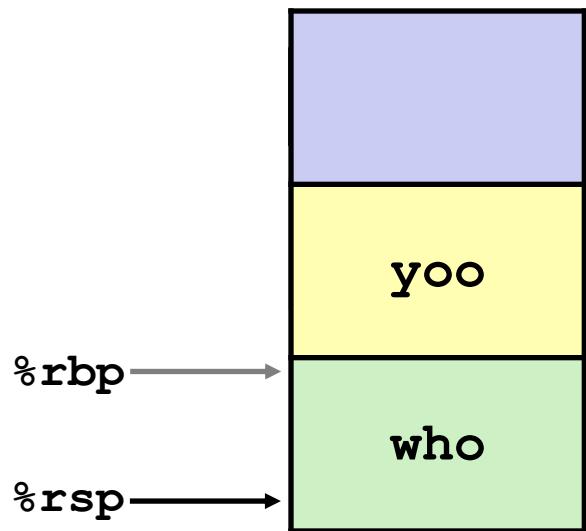

# Example

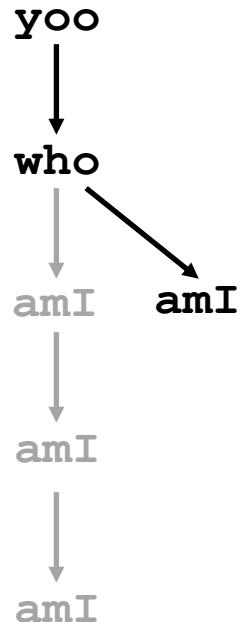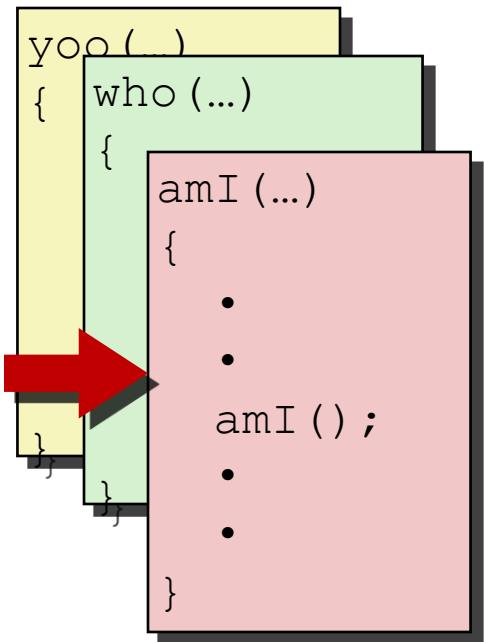


# Stack

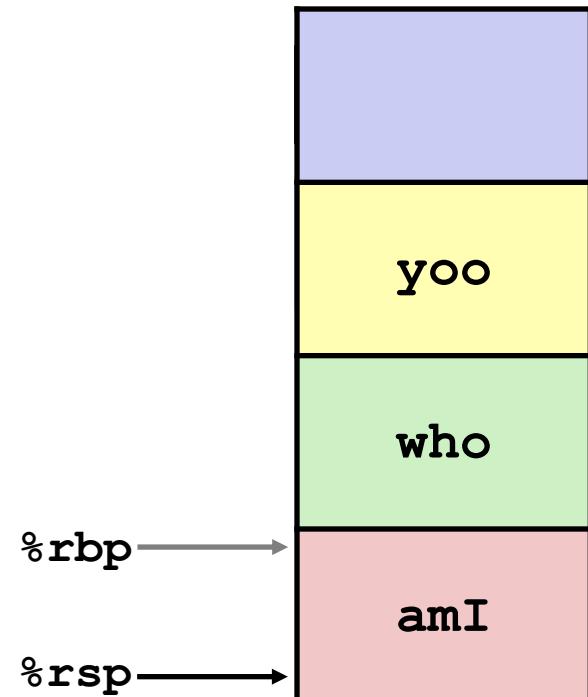


# Example

```
yoo(...)  
{   who(...)  
{  
    . . .  
    amI();  
    . . .  
    amI();  
    . . .  
}
```


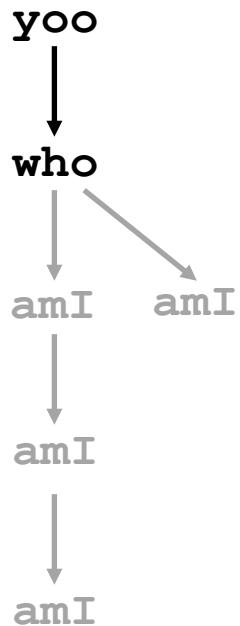


Stack

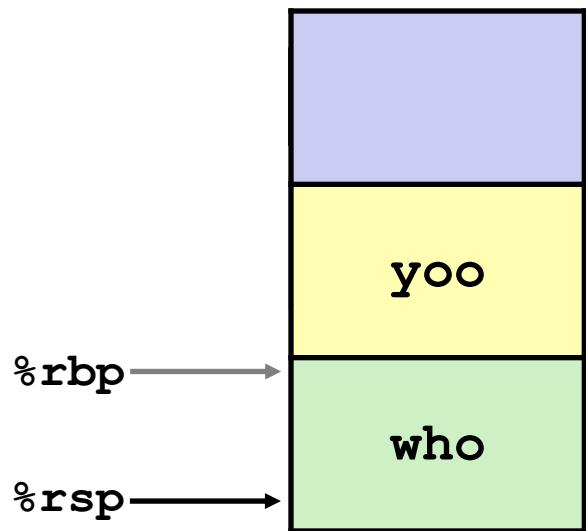

# Example


```
yoo (...)  
{  
    •  
    •  
    who () ;  
    •  
    •  
}
```

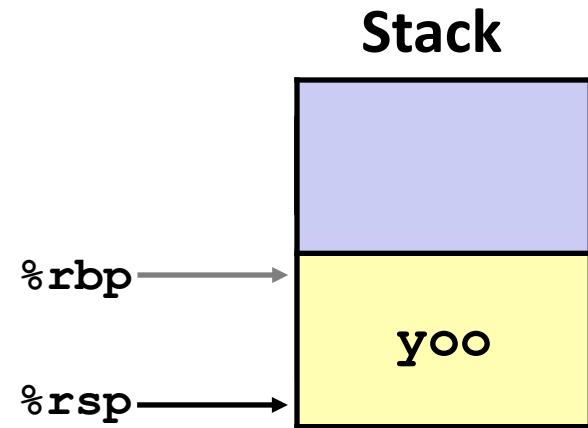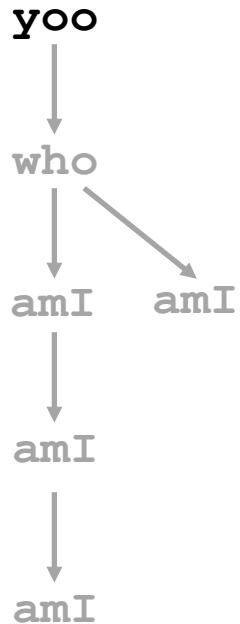

# x86-64/Linux Stack Frame

## ■ Current Stack Frame (“Top” to Bottom)

- “Argument build:”  
Parameters for function about to call
- Local variables  
If can’t keep in registers
- Saved register context
- Old frame pointer (optional)

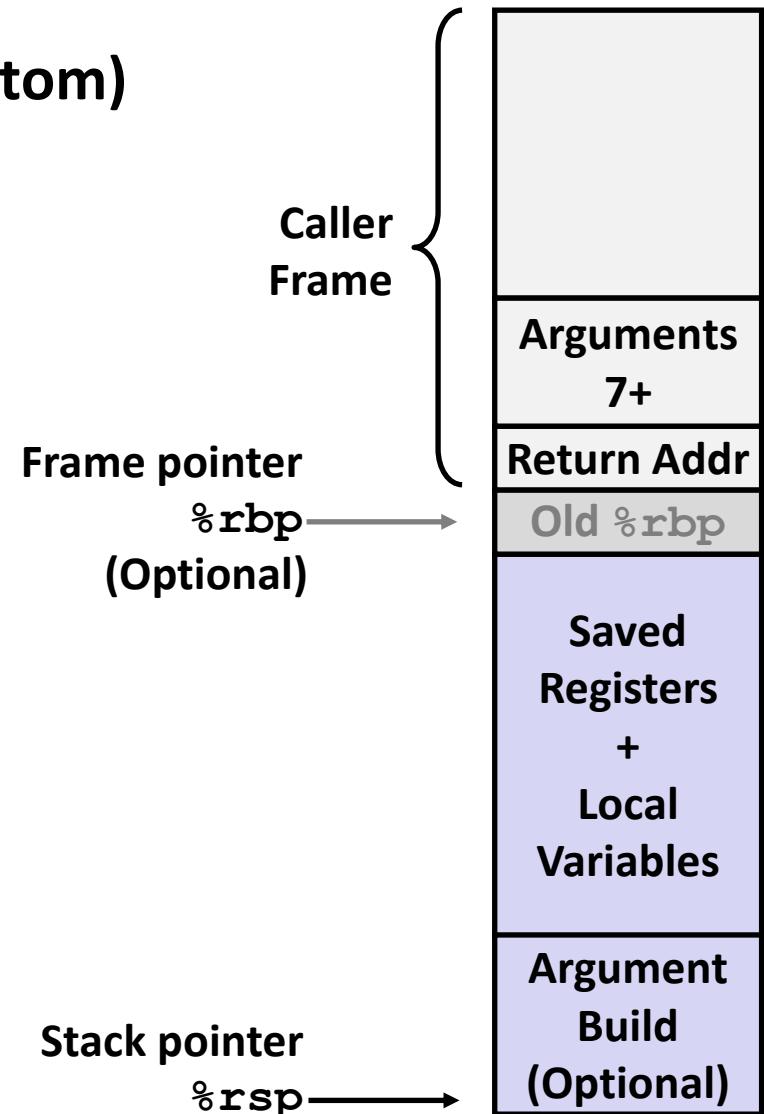

## ■ Caller Stack Frame

- Return address
  - Pushed by **call** instruction
- Arguments for this call

# Example: `incr`

```
long incr(long *p, long val) {  
    long x = *p;  
    long y = x + val;  
    *p = y;  
    return x;  
}
```


```
incr:  
    movq    (%rdi), %rax  
    addq    %rax, %rsi  
    movq    %rsi, (%rdi)  
    ret
```

Register	Use(s)
%rdi	Argument <b>p</b>
%rsi	Argument <b>val</b> , <b>y</b>
%rax	<b>x</b> , Return value

# Example: Calling `incr` #1


```
long call_incr() {
    long v1 = 15213;
    long v2 = incr(&v1, 3000);
    return v1+v2;
}
```

Initial Stack Structure

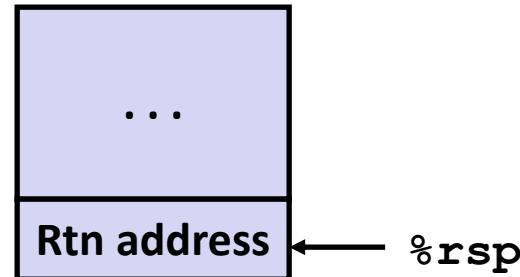

```
call_incr:
    subq    $16, %rsp
    movq    $15213, 8(%rsp)
    movl    $3000, %esi
    leaq    8(%rsp), %rdi
    call    incr
    addq    8(%rsp), %rax
    addq    $16, %rsp
    ret
```

Resulting Stack Structure

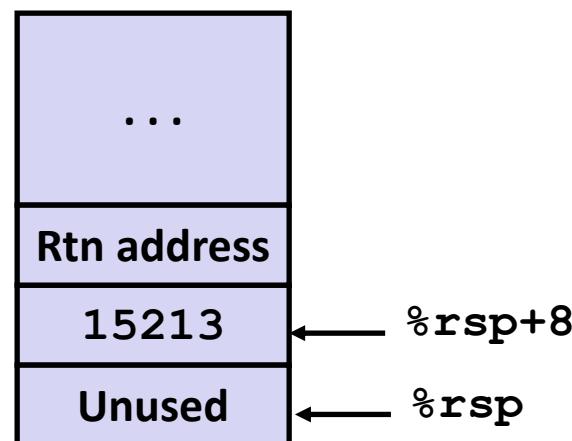


# Example: Calling incr #2

```
long call_incr() {
    long v1 = 15213;
    long v2 = incr(&v1, 3000);
    return v1+v2;
}
```

```
call_incr:
    subq    $16, %rsp
    movq    $15213, 8(%rsp)
    movl    $3000, %esi
    leaq    8(%rsp), %rdi
    call    incr
    addq    8(%rsp), %rax
    addq    $16, %rsp
    ret
```

Stack Structure

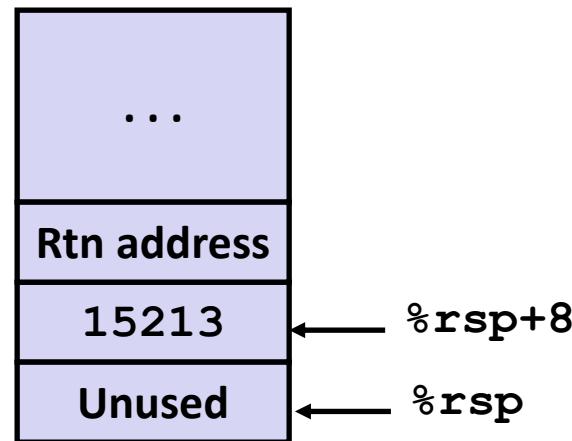


Register	Use(s)
%rdi	&v1
%rsi	3000

# Example: Calling incr #2

```
long call_incr() {
    long v1 = 15213;
    long v2 = incr(&v1, 3000);
    return v1+v2;
}
```

Stack Structure

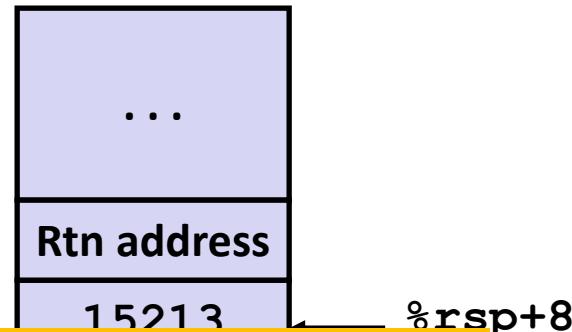

Aside 1: `movl $3000, %esi`

- Note: `movl` -> `%exx` zeros out high order 32 bits.
- Why use `movl` instead of `movq`? 1 byte shorter.


```
call_
sub_
mov_
movl $3000, %esi
leaq 8(%rsp), %rdi
call incr
addq 8(%rsp), %rax
addq $16, %rsp
ret
```

<code>%rdi</code>	<code>&amp;v1</code>
<code>%rsi</code>	3000

# Example: Calling incr #2

```
long call_incr() {
    long v1 = 15213;
    long v2 = incr(&v1, 3000);
    return v1+v2;
}
```

Stack Structure

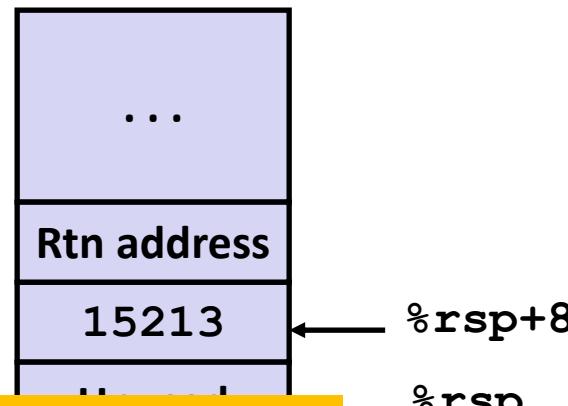

Aside 2: `leaq 8(%rsp), %rdi`

- Computes %rsp+8
- Actually, used for what it is meant!


```
leaq    8(%rsp), %rdi
call   incr
addq    8(%rsp), %rax
addq    $16, %rsp
ret
```

v1	v2
%rsi	3000

# Example: Calling incr #2

```
long call_incr() {
    long v1 = 15213;
    long v2 = incr(&v1, 3000);
    return v1+v2;
}
```

Stack Structure

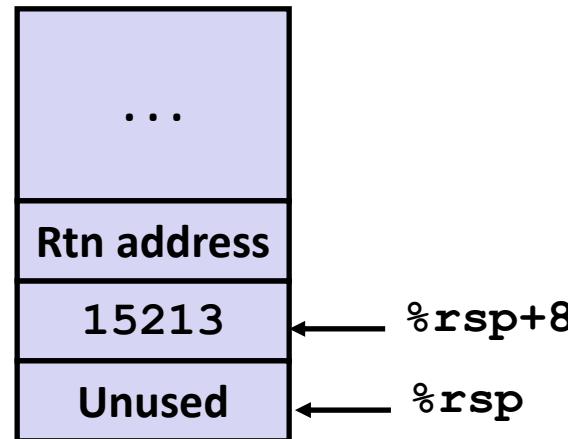


```
call_incr:
    subq    $16, %rsp
    movq    $15213, 8(%rsp)
    movl    $3000, %esi
    leaq    8(%rsp), %rdi
    call    incr
    addq    8(%rsp), %rax
    addq    $16, %rsp
    ret
```

Register	Use(s)
%rdi	&v1
%rsi	3000

# Example: Calling incr #3a

## Stack Structure

```
long call_incr() {
    long v1 = 15213;
    long v2 = incr(&v1, 3000);
    return v1+v2;
}
```

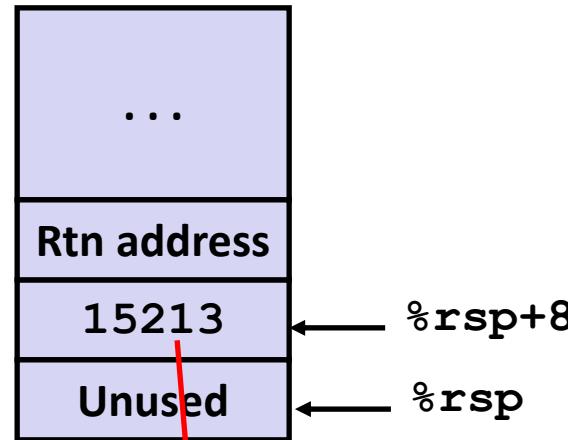

```
call_incr:
    subq    $16, %rsp
    movq    $15213, 8(%rsp)
    movl    $3000, %esi
    leaq    8(%rsp), %rdi
    call    incr
    addq    8(%rsp), %rax
    addq    $16, %rsp
    ret
```


Register	Use(s)
%rdi	&v1
%rsi	3000

```
long incr(long *p, long val) {
    long x = *p;
    long y = x + val;
    *p = y;
    return x;
}
```

# Example: Calling incr #3b

## Stack Structure

```
long call_incr() {
    long v1 = 15213;
    long v2 = incr(&v1, 3000);
    return v1+v2;
}
```

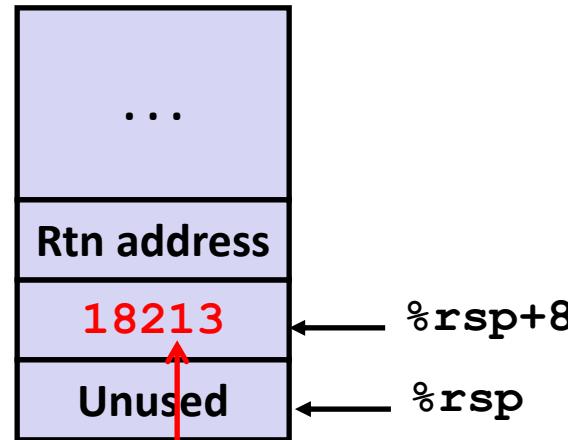

```
call_incr:
    subq    $16, %rsp
    movq    $15213, 8(%rsp)
    movl    $3000, %esi
    leaq    8(%rsp), %rdi
    call    incr
    addq    8(%rsp), %rax
    addq    $16, %rsp
    ret
```


Register	Use(s)
%rdi	&v1
%rsi	3000

```
long incr(long *p, long val) {
    long x = *p;
    long y = x + val;
    *p = y;
    return x;
}
```

# Example: Calling incr #4

## Stack Structure

```
long call_incr() {
    long v1 = 15213;
    long v2 = incr(&v1, 3000);
    return v1+v2;
}
```

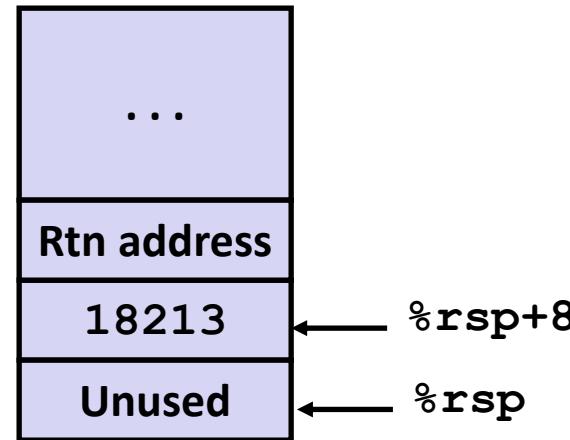

```
call_incr:
    subq    $16, %rsp
    movq    $15213, 8(%rsp)
    movl    $3000, %esi
    leaq    8(%rsp), %rdi
    call    incr
    addq    8(%rsp), %rax
    addq    $16, %rsp
    ret
```


Register	Use(s)
%rax	Return value, 15213

```
long incr(long *p, long val) {
    long x = *p;
    long y = x + val;
    *p = y;
    return x;
}
```

# Example: Calling `incr` #5a

Stack Structure


```
long call_incr() {
    long v1 = 15213;
    long v2 = incr(&v1, 3000);
    return v1+v2;
}
```

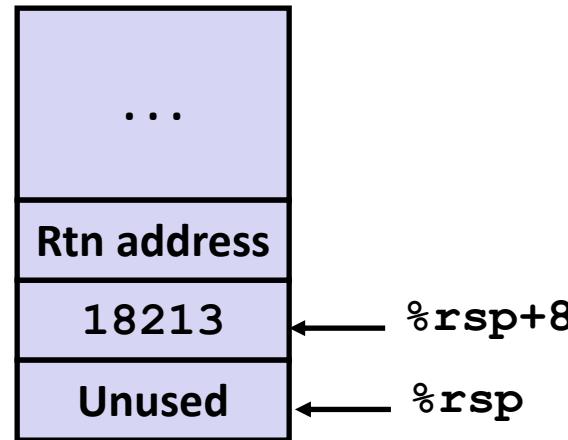

```
call_incr:
subq    $16, %rsp
movq    $15213, 8(%rsp)
movl    $3000, %esi
leaq    8(%rsp), %rdi
call    incr
addq    8(%rsp), %rax
addq    $16, %rsp
ret
```

Register	Use(s)
<code>%rax</code>	Return value


Updated Stack Structure

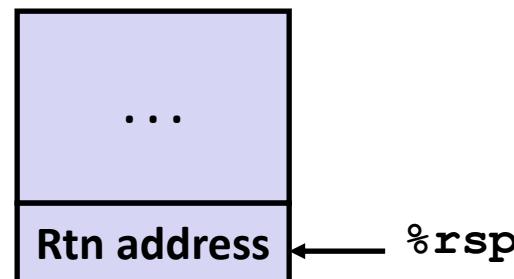

# Example: Calling `incr` #5b

```
long call_incr() {
    long v1 = 15213;
    long v2 = incr(&v1, 3000);
    return v1+v2;
}
```


Updated Stack Structure

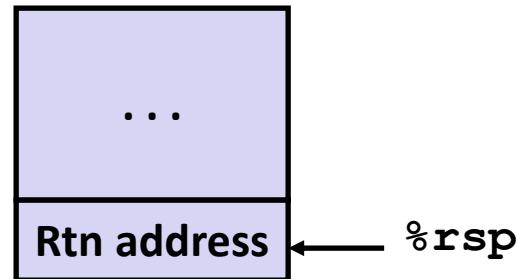

```
call_incr:
subq    $16, %rsp
movq    $15213, 8(%rsp)
movl    $3000, %esi
leaq    8(%rsp), %rdi
call    incr
addq    8(%rsp), %rax
addq    $16, %rsp
ret
```

Register	Use(s)
%rax	Return value

Final Stack Structure

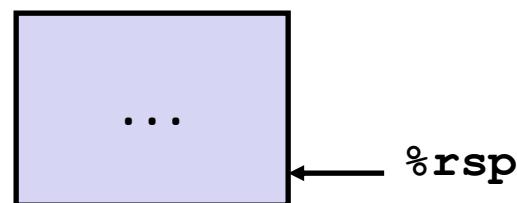

# Register Saving Conventions

## ■ When procedure `yoo` calls `who`:

- `yoo` is the *caller*
- `who` is the *callee*

## ■ Can a register be used for temporary storage?

```
yoo:
```

```
• • •  
    movq $15213, %rdx  
    call who  
    addq %rdx, %rax  
• • •  
    ret
```

```
who:
```

```
• • •  
    subq $18213, %rdx  
• • •  
    ret
```

- Contents of register `%rdx` overwritten by `who`
- If a callee *clobbers* your register, its value is lost!
  - Need coordination between caller/callee

# Register Saving Conventions

- When procedure `yoo` calls `who`:
  - `yoo` is the *caller*
  - `who` is the *callee*
- Can a register be used for temporary storage?
- Conventions
  - “*Caller Saved*”
    - Caller must save values in its stack frame before call
  - “*Callee Saved*”
    - Callee saves values in its frame before using
    - Callee restores values before returning

# x86-64 Linux Register Usage #1

## ■ **%rax**

- Return value
- Also caller-saved
- Can be modified by procedure

## ■ **%rdi, ..., %r9**

- Integer arguments
- Also caller-saved
- Can be modified by procedure


## ■ **%r10, %r11**

- Caller-saved
- Can be modified by procedure

Caller-saved  
Return value

Caller-saved  
Arguments

Caller-saved  
Temporaries

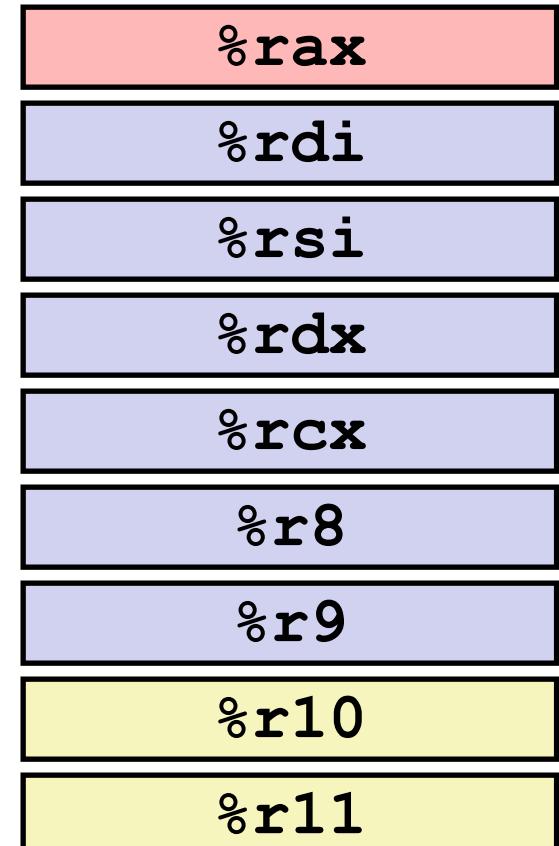

# x86-64 Linux Register Usage #2

## ■ **%rbx, %r12, %r13, %r14**


- Callee-saved
- Callee must save & restore

## ■ **%rbp**

- Callee-saved
- Callee must save & restore
- May be used as frame pointer
- Compiler decides use of rbp

## ■ **%rsp**

- Special form of callee save
- Restored to original value upon exit from procedure

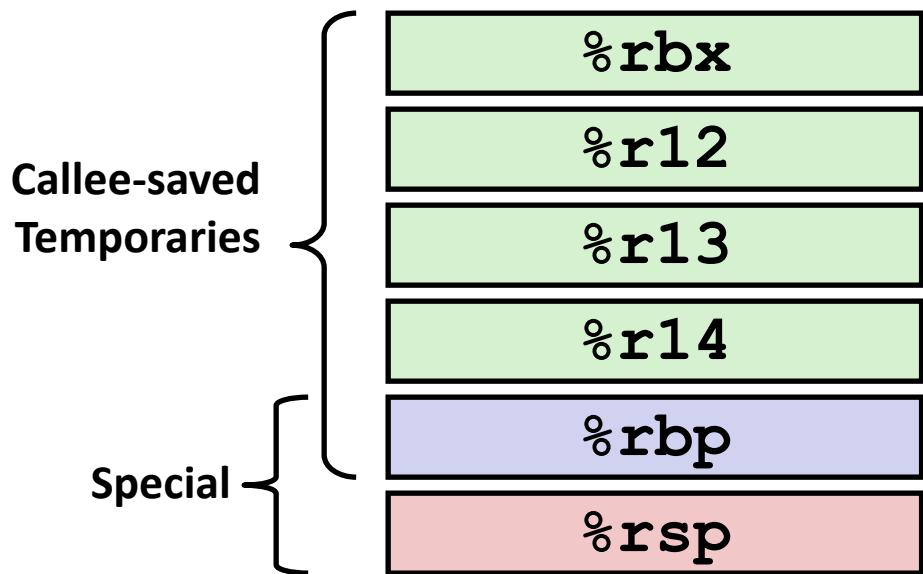


# Quiz Time!

**Canvas Quiz: Day 6 - Machine Procedures**

# Callee-Saved Example #1

```
long call_incr2(long x) {  
    long v1 = 15213;  
    long v2 = incr(&v1, 3000);  
    return x+v2;  
}
```

Initial Stack Structure

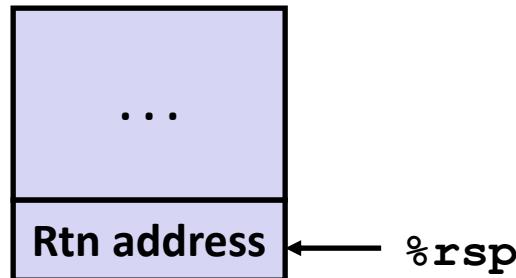


- **x** comes in register **%rdi**.
- We need **%rdi** for the call to **incr**.
- Where should we put **x**, so we can use it after the call to **incr**?

# Callee-Saved Example #2


```
long call_incr2(long x) {  
    long v1 = 15213;  
    long v2 = incr(&v1, 3000);  
    return x+v2;  
}
```

```
call_incr2:  
    pushq  %rbx  
    subq    $16, %rsp  
    movq    %rdi, %rbx  
    movq    $15213, 8(%rsp)  
    movl    $3000, %esi  
    leaq    8(%rsp), %rdi  
    call    incr  
    addq    %rbx, %rax  
    addq    $16, %rsp  
    popq    %rbx  
    ret
```

Initial Stack Structure

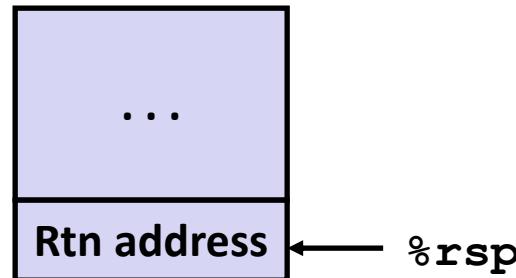

Resulting Stack Structure

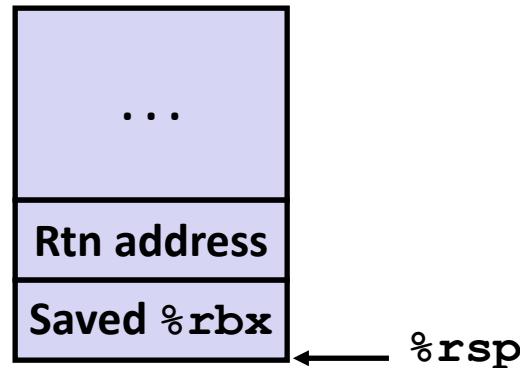


# Callee-Saved Example #3


```
long call_incr2(long x) {
    long v1 = 15213;
    long v2 = incr(&v1, 3000);
    return x+v2;
}
```

```
call_incr2:
    pushq  %rbx
    subq    $16, %rsp
    movq    %rdi, %rbx
    movq    $15213, 8(%rsp)
    movl    $3000, %esi
    leaq    8(%rsp), %rdi
    call    incr
    addq    %rbx, %rax
    addq    $16, %rsp
    popq    %rbx
    ret
```

Initial Stack Structure

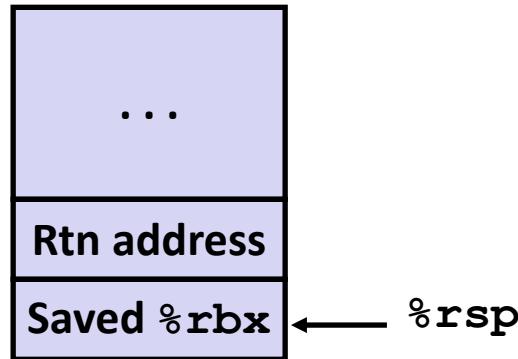

Resulting Stack Structure

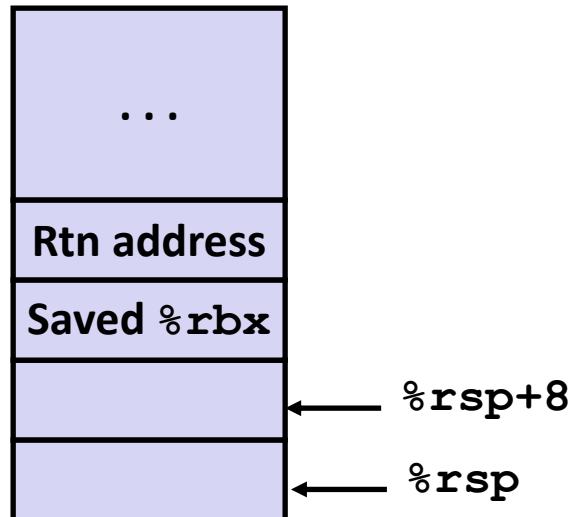


# Callee-Saved Example #4

```
long call_incr2(long x) {  
    long v1 = 15213;  
    long v2 = incr(&v1, 3000);  
    return x+v2;  
}
```

```
call_incr2:  
    pushq  %rbx  
    subq    $16, %rsp  
    movq    %rdi, %rbx  
    movq    $15213, 8(%rsp)  
    movl    $3000, %esi  
    leaq    8(%rsp), %rdi  
    call    incr  
    addq    %rbx, %rax  
    addq    $16, %rsp  
    popq    %rbx  
    ret
```

Stack Structure

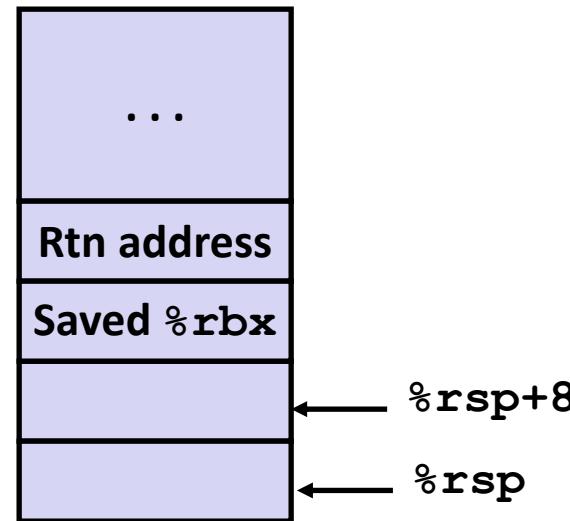


- **x** is saved in **%rbx**,  
a callee saved register

# Callee-Saved Example #5

## Stack Structure

```
long call_incr2(long x) {
    long v1 = 15213;
    long v2 = incr(&v1, 3000);
    return x+v2;
}
```

```
call_incr2:
    pushq %rbx
    subq $16, %rsp
    movq %rdi, %rbx
    movq $15213, 8(%rsp)
    movl $3000, %esi
    leaq 8(%rsp), %rdi
    call incr
    addq %rbx, %rax
    addq $16, %rsp
    popq %rbx
    ret
```

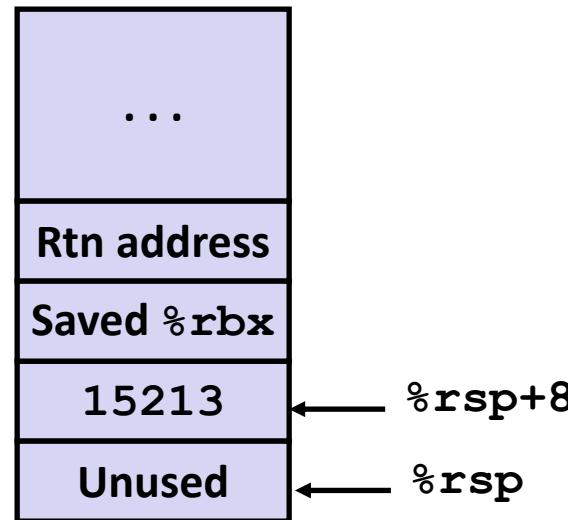


- x** is saved in `%rbx`,  
a callee saved register

# Callee-Saved Example #6

## Stack Structure

```
long call_incr2(long x) {
    long v1 = 15213;
    long v2 = incr(&v1, 3000);
    return x+v2;
}
```

```
call_incr2:
    pushq %rbx
    subq $16, %rsp
    movq %rdi, %rbx
    movq $15213, 8(%rsp)
    movl $3000, %esi
    leaq 8(%rsp), %rdi
    call incr
    addq %rbx, %rax
    addq $16, %rsp
    popq %rbx
    ret
```

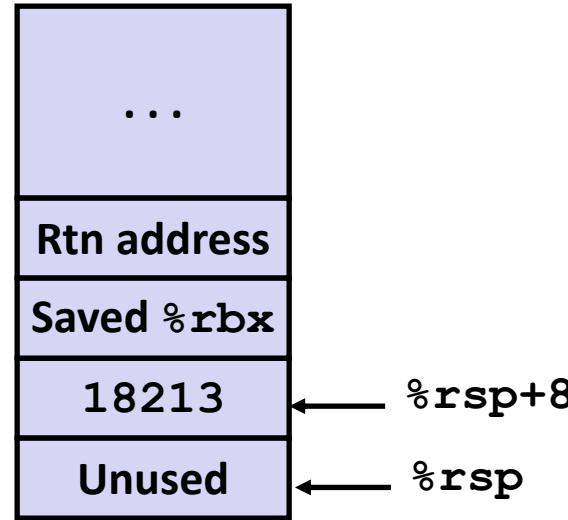

Upon return from `incr`:


- **x** safe in `%rbx`
- Return val **v2** in `%rax`
- Compute **x+v2**:  
**addq %rbx, %rax**

# Callee-Saved Example #7

Stack Structure

```
long call_incr2(long x) {  
    long v1 = 15213;  
    long v2 = incr(&v1, 3000);  
    return x+v2;  
}
```

```
call_incr2:  
    pushq  %rbx  
    subq    $16, %rsp  
    movq    %rdi, %rbx  
    movq    $15213, 8(%rsp)  
    movl    $3000, %esi  
    leaq    8(%rsp), %rdi  
    call    incr  
    addq    %rbx, %rax  
    addq    $16, %rsp  
    popq    %rbx  
    ret
```

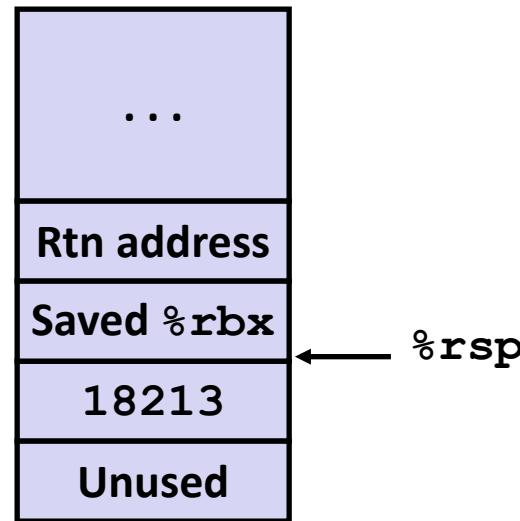


- Return result in `%rax`

# Callee-Saved Example #8


```
long call_incr2(long x) {
    long v1 = 15213;
    long v2 = incr(&v1, 3000);
    return x+v2;
}
```

```
call_incr2:
    pushq %rbx
    subq $16, %rsp
    movq %rdi, %rbx
    movq $15213, 8(%rsp)
    movl $3000, %esi
    leaq 8(%rsp), %rdi
    call incr
    addq %rbx, %rax
    addq $16, %rsp
    popq %rbx
    ret
```

Initial Stack Structure

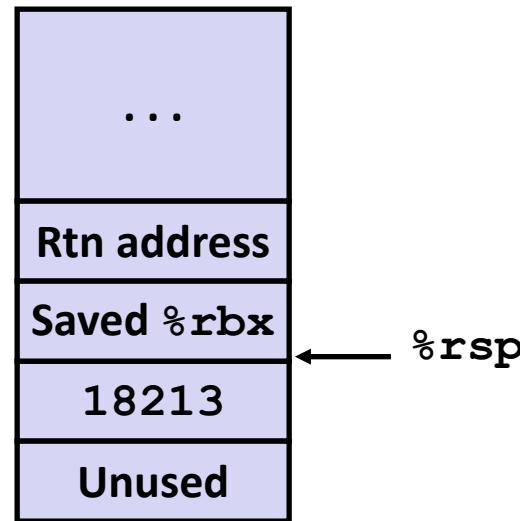

final Stack Structure

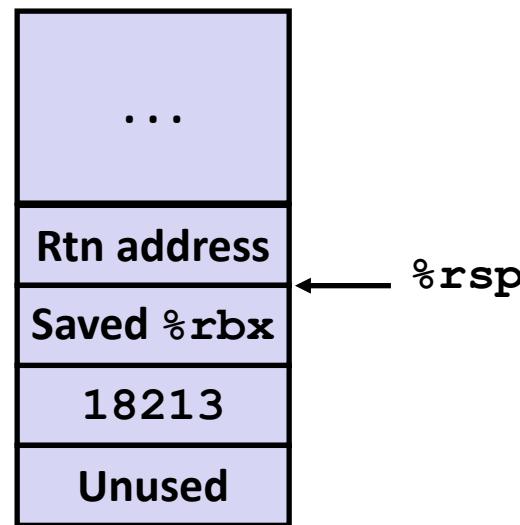

# Today

## ■ Procedures

- Mechanisms
- Stack Structure
- Calling Conventions
  - Passing control
  - Passing data
  - Managing local data
- Illustration of Recursion

# Recursive Function

```
/* Recursive popcount */
long pcount_r(unsigned long x) {
    if (x == 0)
        return 0;
    else
        return (x & 1)
            + pcount_r(x >> 1);
}
```

pcount\_r:

```
    movl    $0, %eax
    testq   %rdi, %rdi
    je      .L6
    pushq   %rbx
    movq   %rdi, %rbx
    andl   $1, %ebx
    shrq   %rdi
    call   pcount_r
    addq   %rbx, %rax
    popq   %rbx
.L6:
    rep; ret
```

# Recursive Function Terminal Case

```
/* Recursive popcount */
long pcount_r(unsigned long x) {
    if (x == 0)
        return 0;
    else
        return (x & 1)
            + pcount_r(x >> 1);
}
```

pcount\_r:

movl	\$0, %eax
testq	%rdi, %rdi
je	.L6
pushq	%rbx
movq	%rdi, %rbx
andl	\$1, %ebx
shrq	%rdi
call	pcount_r
addq	%rbx, %rax
popq	%rbx

.L6:

rep; ret

Register	Use(s)	Type
%rdi	x	Argument
%rax	Return value	Return value

# Recursive Function Register Save

```
/* Recursive popcount */
long pcount_r(unsigned long x) {
    if (x == 0)
        return 0;
    else
        return (x & 1)
            + pcount_r(x >> 1);
}
```


`pcount_r:`

<code>movl</code>	<code>\$0, %eax</code>
<code>testq</code>	<code>%rdi, %rdi</code>
<code>je</code>	<code>.L6</code>
<code>pushq</code>	<code>%rbx</code>
<code>movq</code>	<code>%rdi, %rbx</code>
<code>andl</code>	<code>\$1, %ebx</code>
<code>shrq</code>	<code>%rdi</code>
<code>call</code>	<code>pcount_r</code>
<code>addq</code>	<code>%rbx, %rax</code>
<code>popq</code>	<code>%rbx</code>

`.L6:`

`rep; ret`

Register	Use(s)	Type
<code>%rdi</code>	<code>x</code>	Argument

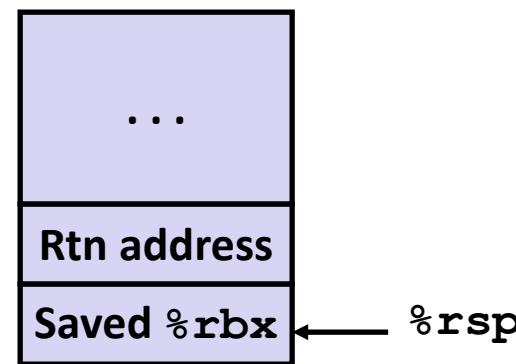

# Recursive Function Call Setup

```
/* Recursive popcount */
long pcount_r(unsigned long x) {
    if (x == 0)
        return 0;
    else
        return (x & 1)
            + pcount_r(x >> 1);
}
```

`pcount_r:`

```
    movl    $0, %eax
    testq   %rdi, %rdi
    je      .L6
    pushq   %rbx
    movq    %rdi, %rbx
    andl    $1, %ebx
    shrq    %rdi
    call    pcount_r
    addq    %rbx, %rax
    popq    %rbx
```

`.L6:`

```
    rep; ret
```

Register	Use(s)	Type
<code>%rdi</code>	<code>x &gt;&gt; 1</code>	Recursive argument
<code>%rbx</code>	<code>x &amp; 1</code>	Callee-saved

# Recursive Function Call

```
/* Recursive popcount */
long pcount_r(unsigned long x) {
    if (x == 0)
        return 0;
    else
        return (x & 1)
            + pcount_r(x >> 1);
}
```

`pcount_r:`

```
    movl    $0, %eax
    testq   %rdi, %rdi
    je      .L6
    pushq   %rbx
    movq    %rdi, %rbx
    andl    $1, %ebx
    shrq    %rdi
    call    pcount_r
    addq    %rbx, %rax
    popq    %rbx
```

`.L6:`

`rep; ret`

Register	Use(s)	Type
<code>%rbx</code>	<code>x &amp; 1</code>	Callee-saved
<code>%rax</code>	Recursive call return value	

# Recursive Function Result

```
/* Recursive popcount */
long pcount_r(unsigned long x) {
    if (x == 0)
        return 0;
    else
        return (x & 1)
            + pcount_r(x >> 1);
}
```

`pcount_r:`

```
    movl    $0, %eax
    testq   %rdi, %rdi
    je      .L6
    pushq   %rbx
    movq   %rdi, %rbx
    andl   $1, %ebx
    shrq   %rdi
    call   pcount_r
    addq   %rbx, %rax
    popq   %rbx
```

`.L6:`

`rep; ret`

Register	Use(s)	Type
<code>%rbx</code>	<code>x &amp; 1</code>	Callee-saved
<code>%rax</code>	Return value	

# Recursive Function Completion

```
/* Recursive popcount */
long pcount_r(unsigned long x) {
    if (x == 0)
        return 0;
    else
        return (x & 1)
            + pcount_r(x >> 1);
}
```


pcount\_r:

```
    movl    $0, %eax
    testq   %rdi, %rdi
    je      .L6
    pushq   %rbx
    movq   %rdi, %rbx
    andl   $1, %ebx
    shrq   %rdi
    call   pcount_r
    addq   %rbx, %rax
    popq   %rbx
```

.L6:

**rep; ret**

Register	Use(s)	Type
%rax	Return value	Return value

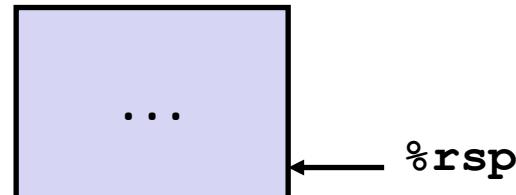

# Observations About Recursion

## ■ Handled Without Special Consideration

- Stack frames mean that each function call has private storage
  - Saved registers & local variables
  - Saved return pointer
- Register saving conventions prevent one function call from corrupting another's data
  - Unless the C code explicitly does so (e.g., buffer overflow in later Lecture)
- Stack discipline follows call / return pattern
  - If P calls Q, then Q returns before P
  - Last-In, First-Out

## ■ Also works for mutual recursion

- P calls Q; Q calls P

# x86-64 Procedure Summary

## ■ Important Points


- Stack is the right data structure for procedure call/return
  - If P calls Q, then Q returns before P

## ■ Recursion (& mutual recursion) handled by normal calling conventions

- Can safely store values in local stack frame and in callee-saved registers
- Put function arguments 7+ at top of stack
- Result return in **%rax**

## ■ Pointers are addresses of values

- On stack or global

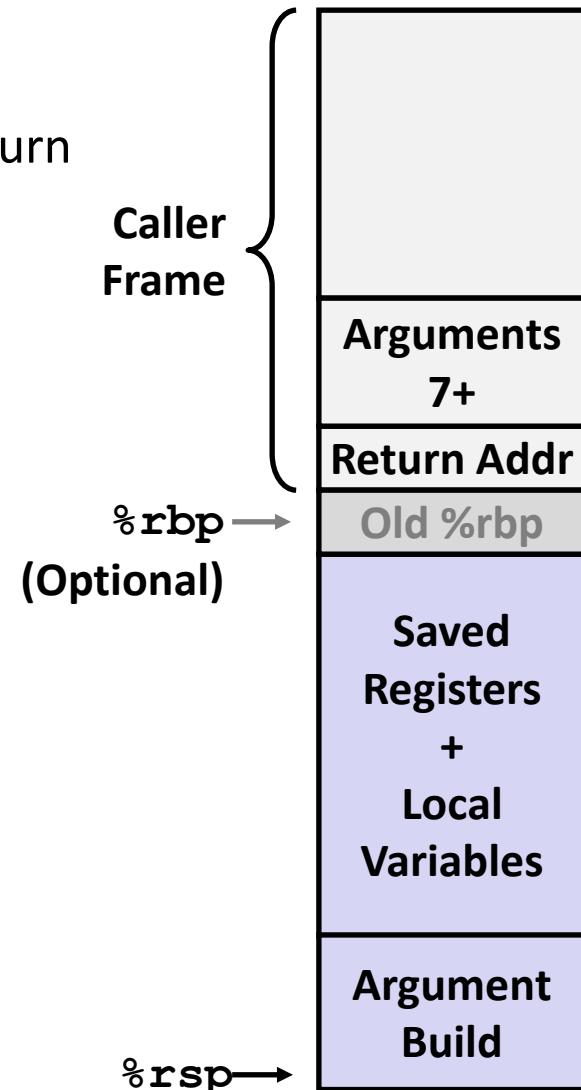

# Small Exercise


```

long add5(long b0, long b1, long b2, long b3, long b4) {
    return b0+b1+b2+b3+b4;
}

long add10(long a0, long a1, long a2, long a3, long a4, long a5,
           long a6, long a7, long a8, long a9) {
    return add5(a0, a1, a2, a3, a4) +
           add5(a5, a6, a7, a8, a9);
}

```

- Where are  $a_0, \dots, a_9$  passed?  
`rdi, rsi, rdx, rcx, r8, r9, stack`
- Where are  $b_0, \dots, b_4$  passed?  
`rdi, rsi, rdx, rcx, r8`
- Which registers do we need to save?  
Ill-posed question. Need assembly.

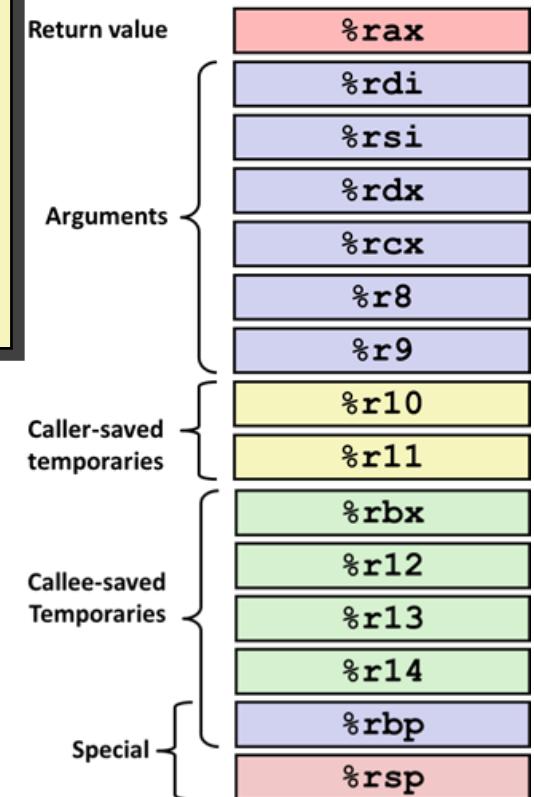

# Small Exercise

```
long add5(long b0, long b1, long b2, long b3, long b4) {
    return b0+b1+b2+b3+b4;
}

long add10(long a0, long a1, long a2, long a3, long a4, long a5,
           long a6, long a7, long a8, long a9) {
    return add5(a0, a1, a2, a3, a4) +
           add5(a5, a6, a7, a8, a9);
}
```

```
add10:
    pushq %rbp
    pushq %rbx
    movq %r9, %rbp
    call add5
    movq %rax, %rbx
    movq 48(%rsp), %r8
    movq 40(%rsp), %rcx
    movq 32(%rsp), %rdx
    movq 24(%rsp), %rsi
    movq %rbp, %rdi
    call add5
    addq %rbx, %rax
    popq %rbx
    popq %rbp
    ret
```

```
add5:
    addq %rsi, %rdi
    addq %rdi, %rdx
    addq %rdx, %rcx
    leaq (%rcx,%r8), %rax
    ret
```

